

**SINGLE-PHASE GLASS PASSIVATED
 SILICON MINI BRIDGE RECTIFIER**

VOLTAGE RANGE 50 to 1000 Volts CURRENT 0.5 Ampere

FEATURES


- * Surge overload rating - 30 amperes peak
- * Ideal for printed circuit board
- * Reliable low cost construction utilizing molded
- * Glass passivated device
- * Polarity symbols molded on body
- * Mounting position: Any
- * Weight: 0.5 gram

MECHANICAL DATA

- * Epoxy : Device has UL flammability classification 94V-0
- * UL listed the recognized component directory, file #E94233

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

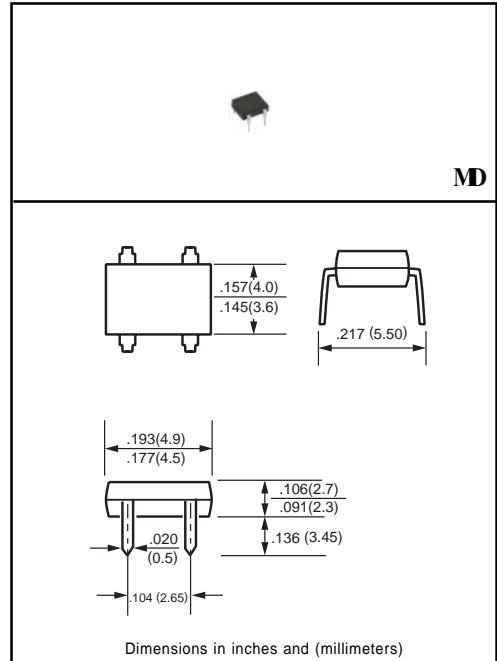

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)


RATINGS	SYMBOL	MD1	MD2	MD3	MD4	MD5	MD6	MD7	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Bridge Input Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Output Rectified Current at TA = 30°C	I _O	0.5							Amp
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30							Amps
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to + 150							°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)


CHARACTERISTICS	SYMBOL	MD1	MD2	MD3	MD4	MD5	MD6	MD7	UNITS
Maximum Forward Voltage Drop per Bridge Element at 0.5A DC	V _F	1.05							Volts
Maximum Reverse Current at rated	I _R	5.0							uAmps
DC Blocking Voltage per element		0.5							mAmps

RATING AND CHARACTERISTIC CURVES (MD1 THRU MD7)


TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

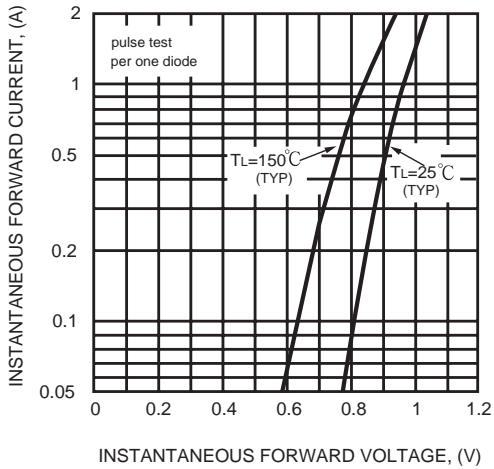

POWER DISSIPATION

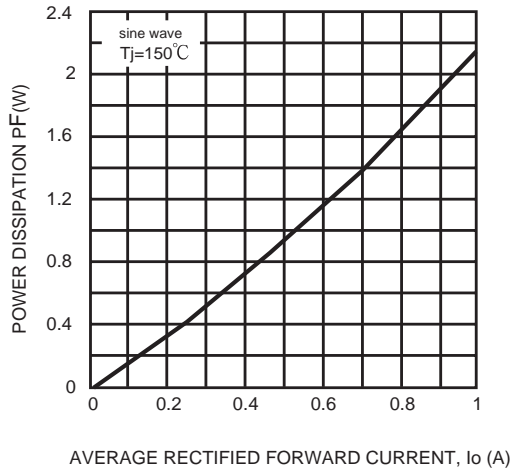

SURGE FORWARD CURRENT CAPABILITY

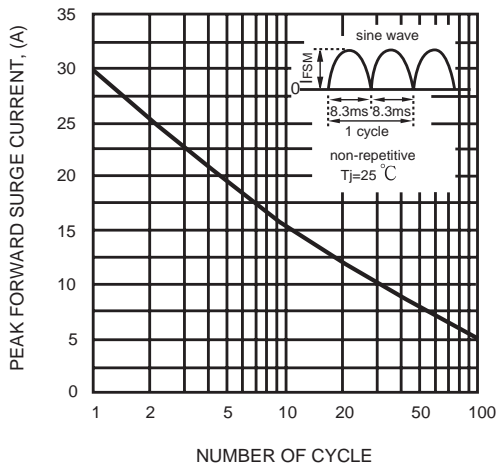

TYPICAL FORWARD CURRENT DERATING CURVE

