

MD1S~MD10S


BRIDGE RECTIFIER

VOLTAGE 100 to 1000Volts CURRENT 0.8 Amperes



MBF

Unit : inch(mm)

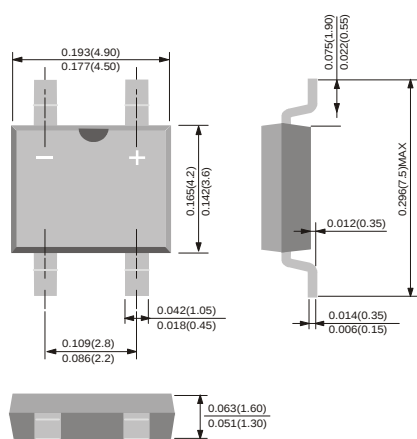

FEATURES

- Plastic material used carries Underwriters Laboratory recognition 94V-O
- Low leakage
- Surge overload rating-- 30 amperes peak
- Ideal for printed circuit board
- Exceeds environmental standards of MIL-S-19500
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: Reliable low cost construction utilizing molded plastic technique results in
- inexpensive product
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbols molded or marking on body
- Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, Resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	MD1S	MD2S	MD4S	MD5S	MD8S	MD10S	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_R	100	200	400	600	800	1000	V
Maximum Average Forward Current $T_A=55^{\circ}\text{C}$ $T_A=25^{\circ}\text{C}$	$I_{F(AV)}$	0.8						A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30						A
Power Dissipation at $T_A=25^{\circ}\text{C}$	P_D	1.4						W
I^2t Rating for fusing ($t<8.35\text{ms}$)	I^2t	3.735						A ² S
Maximum Forward Voltage Drop per Bridge Element at 0.5A	V_F	1.0						V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J=25^{\circ}\text{C}$ $T_J=125^{\circ}\text{C}$	I_R	10.0 500						μA
Typical Junction capacitance (Note 1)	C_J	25						pF
Typical thermal resistance (Note 2)	$R_{\theta JA}$ $R_{\theta JL}$	85 20						$^{\circ}\text{C} / \text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150						$^{\circ}\text{C}$

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Thermal resistance from junction to ambient mounted on 5cmX6cm P.C.B. with minimum copper pads.

MD1S~MD10S

RATING AND CHARACTERISTIC CURVES

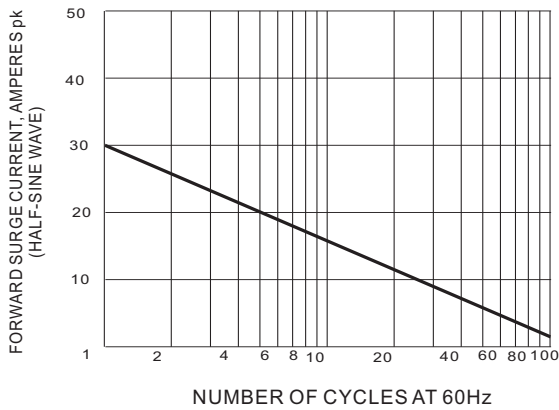


Fig.1 MAXIMUM NON-REPETITIVE SURGE CURRENT

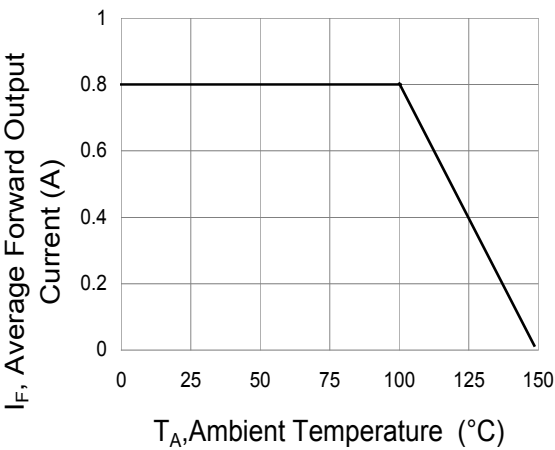


Fig.2 Derating Curve For Output Rectified Current

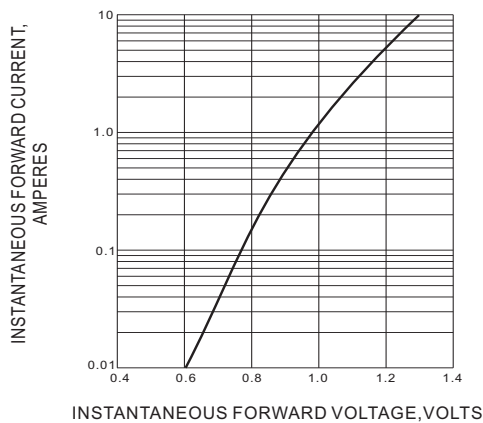


Fig.3 TYPICAL FORWARD CHARACTERISTICS

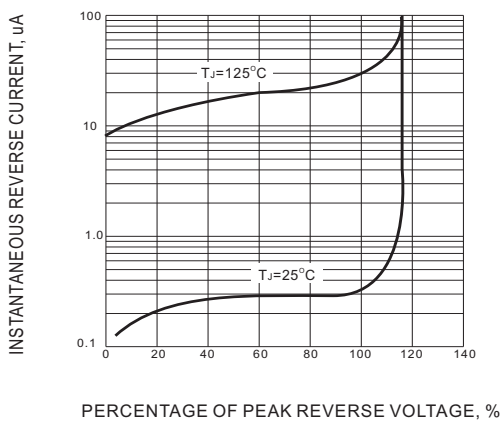


Fig.4 TYPICAL REVERSE CHARACTERISTICS