


Features:

- n Isolated mounting base 2500V~
- n Pressure contact technology with Increased power cycling capability
- n Space and weight savings

Typical Applications

- n AC/DC Motor drives
- n Various rectifiers
- n DC supply for PWM inverter

$I_{F(AV)}$ **110A**
 V_{RRM} **600~1800V**
 I_{FSM} **$2.6A \times 10^3$**
 I^2t **$34.4A^2 \cdot S \cdot 10^3$**

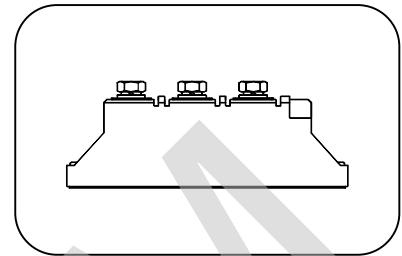

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _f (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, T _C =100°C	150			110	A
$I_{F(RMS)}$	RMS forward current		150			173	A
V_{RRM}	Repetitive peak reverse voltage	V _{RRM} tp=10ms V _{RSM} = V _{RRM} +200V	150	600		1800	V
I_{RRM}	Repetitive peak current	at V _{RRM}	150			8	mA
I_{FSM}	Surge forward current	10ms half sine wave	150			2.60	KA
I^2t	I ² T for fusing coordination	V _R =0.6V _{RRM}					34.4
V_{FO}	Threshold voltage		150			0.80	V
r_F	Forward slop resistance						1.74
V_{FM}	Peak forward voltage	I _{FM} =330A	25			1.45	V
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180° sine: Single side cooled				0.350	°C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink	At 180° sine: Single side cooled				0.15	°C /W
V_{iso}	Isolation voltage	50Hz, R.M.S, t=1min, I _{iso} :1mA(max)		2500			V
F_m	Terminal connection torque (M5)					4	N·m
	Mounting torque (M6)					6	N·m
T_{stg}	Stored temperature			-40		125	°C
W_t	Weight					160	g
Outline	217F3/223F3						

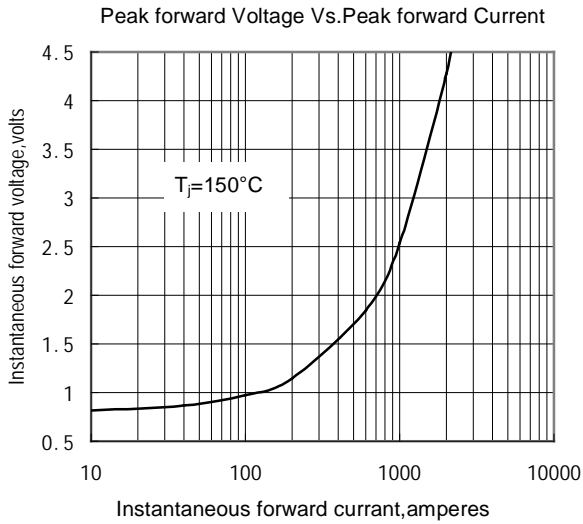


Fig.1

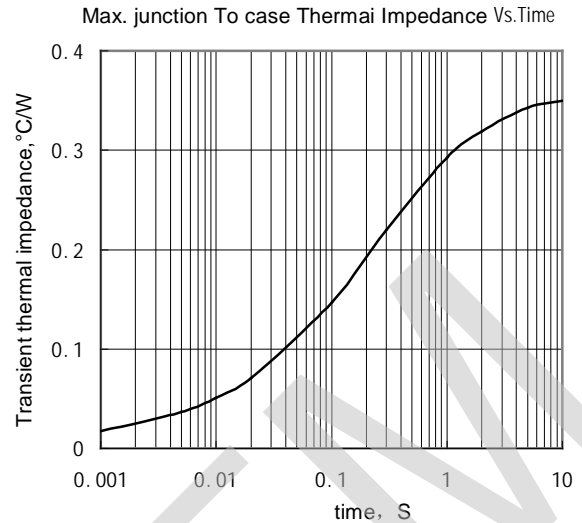


Fig.2

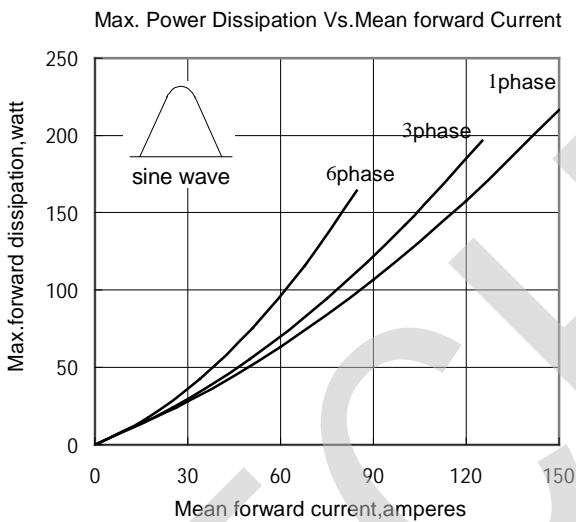


Fig.3

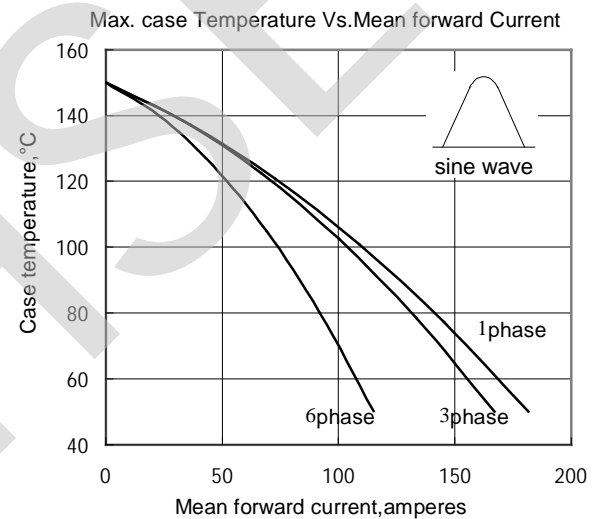


Fig.4

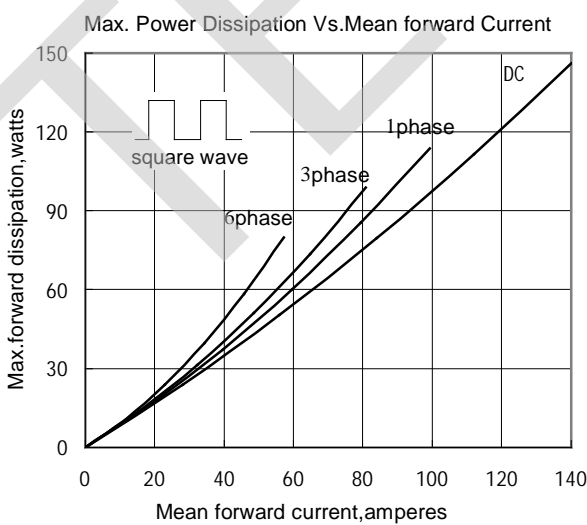


Fig.5

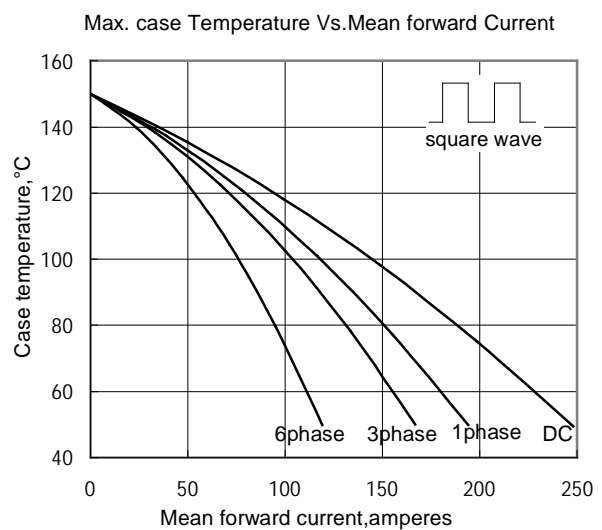


Fig.6

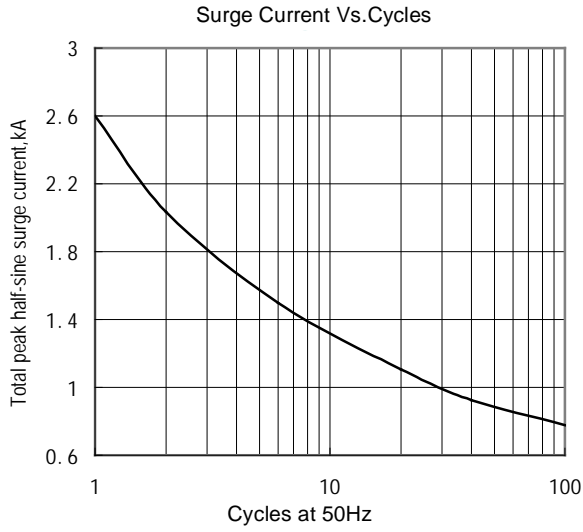


Fig.7

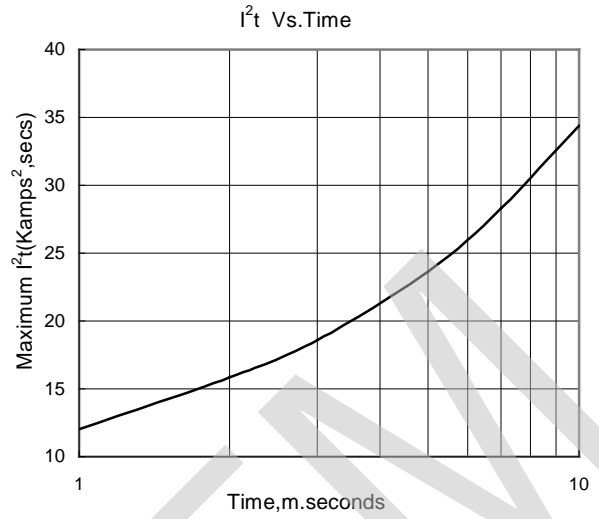


Fig.8

Outline:

