


ME Series

14 pin DIP, 5.0 Volt, ECL, PECL, Clock Oscillator



ME Series ECL/PECL Clock Oscillators, 10 KH Compatible with Optional Complementary Outputs

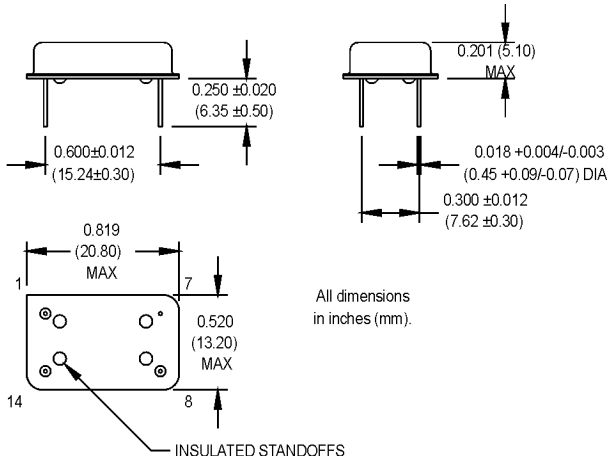

Pin Connections

PIN	FUNCTION(S) (Model Dependent)
1	N/C, Output #2
7	-Vee, Ground
8	Output #1
14	+Vcc

Ordering Information

	ME	1	3	X	A	D	-R	00.0000	MHz
Product Series									
Temperature Range									
1: 0°C to +70°C		2: -40°C to +85°C							
5: -10°C to +85°C		6: -20°C to +70°C							
7: 0°C to +85°C									
Stability									
1: ±1000 ppm		2: ±500 ppm							
3: ±100 ppm		4: ±50 ppm							
6: ±25 ppm		*8: ±20 ppm							
Output Type									
X: Single Output		Z: Dual Output							
Symmetry/Logic Compatibility									
A: 40/60 (std.)		B: 45/55							
Package/Lead Configurations									
A: DIP; Gold Flash Header		D: DIP; Nickel Header							
G: Gull Wing; Nickel Header		X: Gull Wing; Gold Flash Header							
RoHS Compliance									
Blank: non-RoHS compliant part									
-R: RoHS compliant part									
Frequency (customer specified)									

*Contact factory for availability.

	PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition
Electrical Specifications	Frequency Range	F	19.44		155.52	MHz	
	Frequency Stability	$\Delta F/F$	(See Ordering Information)				
	Operating Temperature	T _A	(See Ordering Information)				
	Storage Temperature	T _S	-55		+125	°C	
	Input Voltage	V _{cc}	4.75	5.0	5.25	V	
	Input Current	I _{ee} /I _{cc}		35	60	mA	
	Symmetry (Duty Cycle)		(See Ordering Information)				V _{cc} -1.3 V level
	Load		130 Ω to V _{cc} -2V or Thevenin Equivalent				See Note 1
	Rise/Fall Time	T _r /T _f			2.5	ns	See Note 2
	Logic "1" Level	V _{oh}	V _{cc} -0.98			V	
	Logic "0" Level	V _{ol}			V _{cc} -1.63	V	
	Cycle to Cycle Jitter			11	25	ps RMS	1 Sigma
Environmental	Mechanical Shock	Per MIL-STD-202, Method 213, Condition C					
	Vibration	Per MIL-STD-202, Method 201 & 204					
	Wave Solder Conditions	See page 147					
	Hermeticity	Per MIL-STD-202, Method 112 (1 x 10 ⁻⁸ atm.cc/s of helium)					
	Solderability	Per EIAJ-STD-002					

- Internally terminated outputs. See load circuit diagram #4.
- Rise/Fall times are measured between V_{cc} -0.98 V and V_{cc} -1.63 V.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

www.DataSheet4U.com

Revision: 11-21-06