

MF1051S-1

FOR DIGITAL MOBILE TELEPHONE, Tx

MF1051S-1

DESCRIPTION

This SAW filter for the transmitting RF circuit of digital mobile communication equipment operating at 1429 MHz ~ 1453 MHz.

FEATURES

1. SMD package insures small size, lightweight.
2. Adjustment free.
3. Low insertion loss and high stop band attenuation.
4. Wide and sharp passband characteristics.
5. High stability and reliability.
6. Designed for reflow solderings.


APPLICATION

- Digital mobile cellular telephone
- Portable digital cellular telephone
- Wireless equipment

ELECTRICAL PERFORMANCE

Parameter	MF1051S-1			Units
	Min	Typ	Max	
PASSBAND FREQUENCY	1429 – 1453			MHz
PASSBAND CHARACTERISTICS				
Insertion Loss		2.2	2.8	dB
Ripple		0.6	1.5	dBp-p
VSWR		1.8	2.5	
STOPBAND ATTENUATION				
0 – 1050 MHz	30	35		dB
1050 – 1360 MHz	20	23		dB
1477 – 1501 MHz	6	7.5		dB
1607 – 1631 MHz	30	35		dB
1785 – 1809 MHz	27	32		dB
1809 – 3000 MHz	20	23		dB

PACKAGE OUTLINE DIMENSIONS

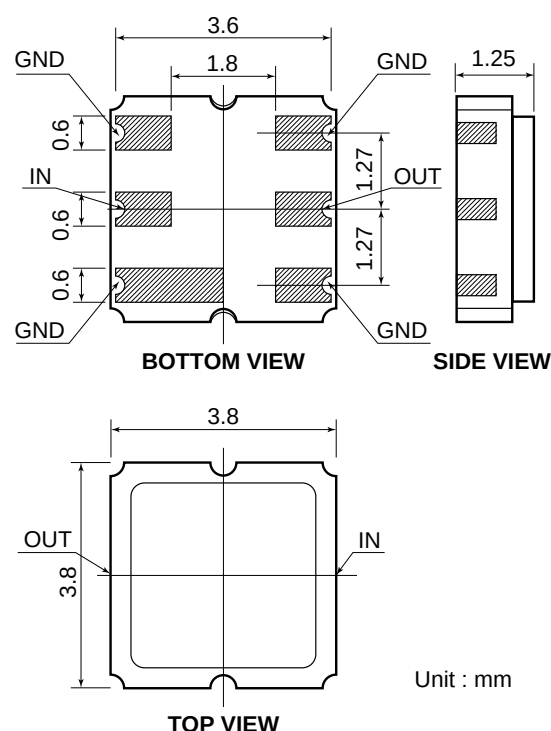

DIMENSIONS ARE IN MILLIMETERS
±0.2 UNLESS OTHERWISE SPECIFIED

MF1051S-1 TYPICAL CHARACTERISTICS

