


HIGH POWER SWITCHING APPLICATIONS.

MOTOR CONTROL APPLICATIONS.

FEATURES:

- The Collector is Isolated from Case.
- With Built-in Free Wheeling Diode
- High DC Current Gain : $hFE=100$ (Min.) ($I_C=100A$)
- Low Saturation Voltage: $V_{CE}(sat)=2V$ (Max.) ($I_C=100A$)
- High Speed : $t_f=2\mu s$ (Max.) ($I_C=100A$)

Unit in mm

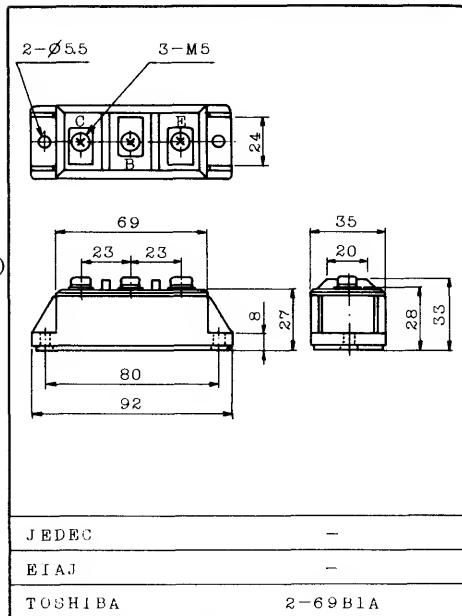

Weight : 227g






MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	600	V
Collector-Emitter Voltage	$V_{CEO}(\text{SUS})$	450	V
Emitter-Base Voltage	V_{EBO}	6	V
Collector Current	DC	I_C	A
	1ms	I_{CP}	A
	DC	$-I_C$	A
Base Current	I_B	5	A
Collector Power Dissipation ($T_c=25^\circ C$)	P_C	600	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-40 ~ 125	$^\circ C$
Isolation Voltage	V_{Isol}	2000(AC 1 Minute)	V
Screw Torque		30	$\text{kg} \cdot \text{cm}$

MG100H1AL2

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=600\text{V}, I_E=0$	-	-	2.0	mA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=6\text{V}, I_C=0$	-	-	400	mA
Collector-Emitter Sustaining Voltage	$V_{CEO(\text{SUS})}$	$I_C=0.5\text{A}, L=40\text{mH}$	450	-	-	V
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=100\text{A}$	100	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C=100\text{A}, I_B=2\text{A}$	-	-	2.0	V
Base-Emitter Saturation Voltage	$V_{BE(\text{sat})}$		-	-	2.5	V
Emitter-Collector Voltage	V_{ECO}	$I_E=100\text{A}, I_B=0$	-	-	1.5	V
Reverse Recovery Time	t_{rr}	$-I_C=100\text{A}, V_{EB}=3\text{V}$ $V_{CE}=300\text{V}$	-	-	2.0	μs
Collector Output Capacitance	C_{ob}	$V_{CB}=50\text{V}, I_E=0$ $f=1\text{MHz}$	-	1000	-	pF
Switching Time	Turn-on Time	t_{on}	 $I_{B1} = -I_{B2} = 2\text{A}$ DUTY CYCLE = 0.5%	-	-	1.0
	Storage Time	t_{stg}		-	-	12
	Fall Time	t_f		-	-	2.0
Thermal Resistance (Junction to Case)	$R_{th(j-c)}$	Transistor	-	-	0.208	$^\circ\text{C}/\text{W}$
		Diode	-	-	0.65	

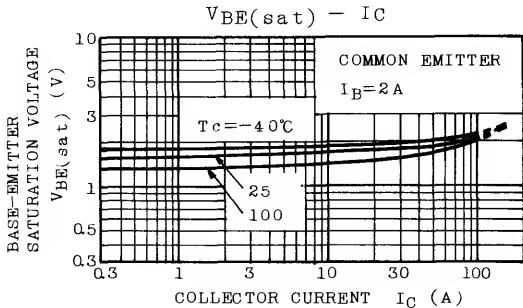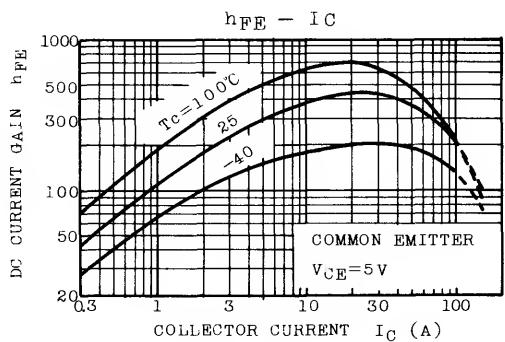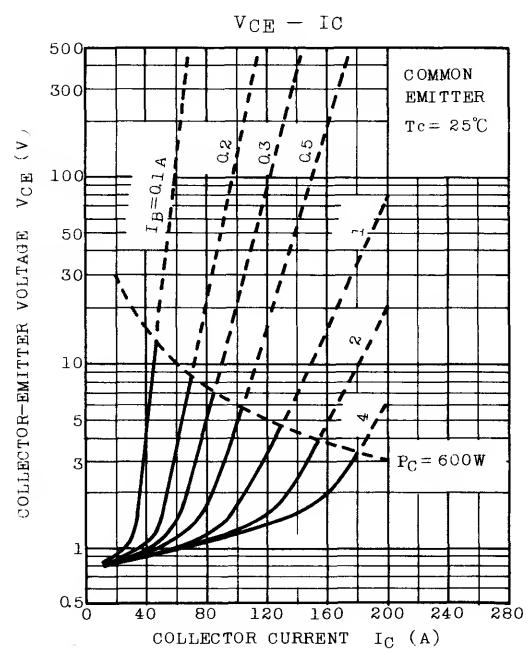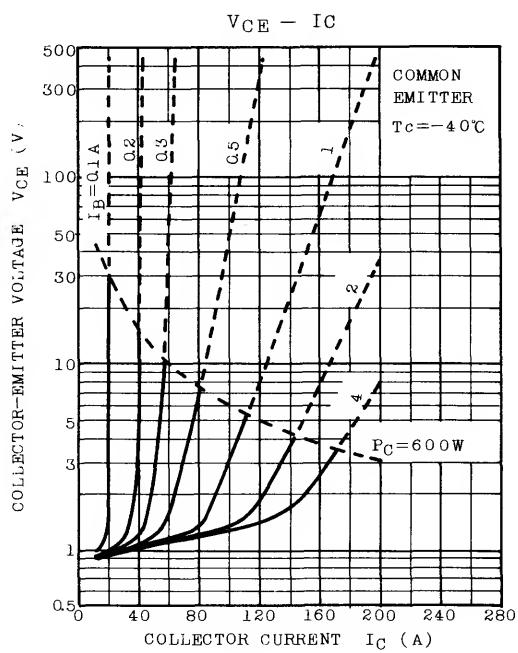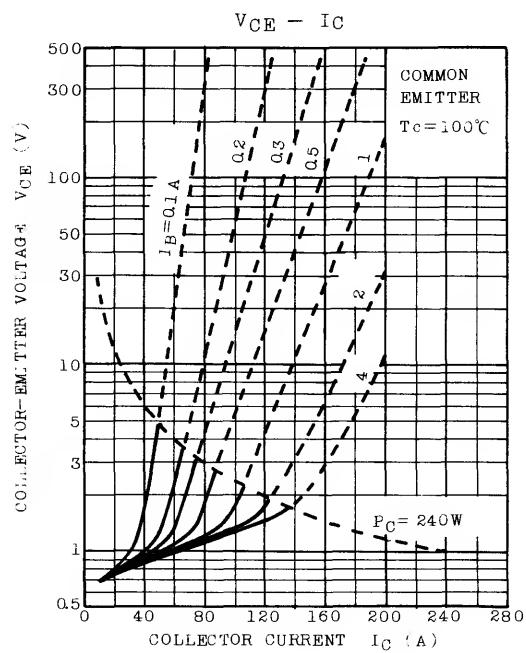

MG100H1AL2

