




OUTLINE DIMENSION

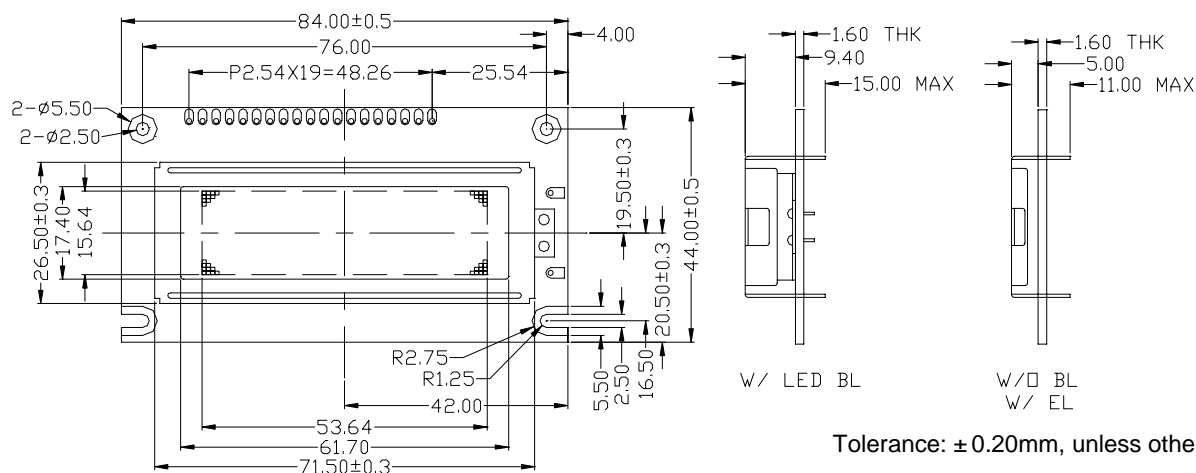

BLOCK DIAGRAM

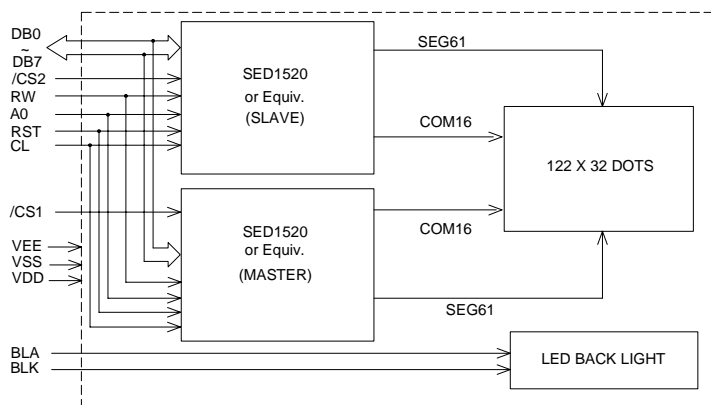

DISPLAY PATTERN



MECHANICAL SPECIFICATION

Item	Dimensions(W)X(H)	Unit
Overall Size	84.0x44.0	MM
View Area	61.7x17.4	MM
Dot Size	0.40x0.45	MM
Dot Pitch	0.44x0.49	MM

PIN ASSIGNMENT

Pin no	Symbol	Function
1	VSS	Ground
2	VDD	Supply voltage for logic
3	VEE	Input voltage for LCD
4	A0	Data / Instruction signal
5	/CS1	Read/write enable signal(master)
6	/CS2	Read/write enable signal(slave)
7	CL	External clock
8	/RD(E)	Read mode (Enable)
9	/WR(R/W)	Write mode(Read/Write)
10~17	DB0~7	Data bus 0~7
18	RST	Reset
19	BLA	Back light anode
20	BLK	Back light cathode

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Min	Max	Unit
Supply for logic voltage	VDD	25°C	0	6.7	V
LCD driving supply voltage	VLCD	25°C	0	10	V
Input voltage	VI	25°C	0	VDD	V

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Typical	Max	Unit
Supply voltage for logic	VDD	---	2.7	---	5.5	V
Supply current for logic	IDD	---	---	1.45	4	mA
Operation voltage for LCD	VDD-VEE	0°C	5.4	5.7	6.0	V
		25°C	5.1	5.4	5.7	V
		50°C	4.8	5.1	5.4	V
Input voltage " H " level	VIH	---	0.8VDD	---	VDD	V
Input voltage " L " level	UIL	---	0	---	0.2 VDD	V
Supply voltage for back light	VF	---	---	4.2	4.6	V
Supply current for back light	IF	VF=4.2V	---	120	240	mA

REMARKS:

- LCD options: STN, FSTN.
- Back light Options: LED\EL Back light feature.