




PIN DESCRIPTION	
PIN NO	SYMBOL
1	VCC
2	VCC
3	VSS
4	IN0-
5	IN0+
6	VSS
7	IN1-
8	IN1+
9	VSS
10	IN2-
11	IN2+
12	VSS
13	CLK-
14	CLK+
15	VSS
16	IN3-
17	IN3+
18	VSS
19	BL_ADJ
20	VBL



PIXTEL DETAIL

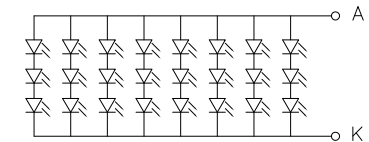

BACKLIGHT CIRCUIT DIAGRAM

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE.
2. OPERATING VOLTAGE: VCC=3.3V(TYP.), VBL=5.0V(TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK.
4. DRIVER: HX8262+HX8678.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. SURFACE LUMINANCE: 430CD/M<sup>2</sup>(TYP.)
8. LED BACKLIGHT: 24-CHIP WHITE LED, If=160mA, Vf=9.6±0.6V.  
THE LED DRIVER IS BUILT-IN THE PCB.
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
10. INTERFACE: 4-LANE LVDS(24-BIT DATA), FRC=HIGH
11. GENERAL TOLERANCE: ±0.2MM.
12. ROHS COMPLIANT.

VER.	REVISED DESCRIPTION	REVISER	DATE
03	CORRECT THE FRC OF NOTES	RITA	2017.10.24
02	CORRECT THE DESIGN OF THE SIDE VIEW	RITA	2017.08.21
01	FIRST ISSUE	JACK	2017.06.08

MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	JACK 2017.06.08	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: mm	MI0700AJT-35
APPROVED BY:			DESCRIPTION:
VERSION NO:	03		TFT MODULE