


#### DESCRIPTION

MI32T-L is GaAlAs infrared emitting diode molded in 3mm diameter clear transparent lens.

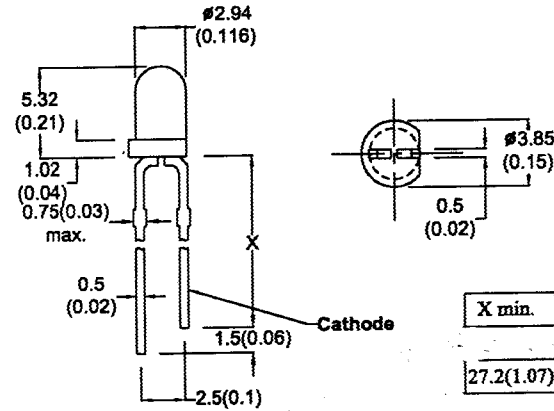

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

#### ABSOLUTE MAXIMUM RATINGS

Forward Current (Continuous)	100mA
Pulse Forward Current	1A*
Reverse Voltage (Continuous)	6V
Power Dissipation	160mW
Operating Temperature Range	-25 to +85°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

\* Pulse Width = 10μs, Duty Ratio = 0.01.

#### ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Radiant Power Output	Po	4.0	8.0		mW	IF=50mA
Forward Voltage	VF		1.28	1.8	V	IF=50mA
Reverse Current	IR			100	μA	VR=5V
Half Intensity Beam Angle	θHI		80		degree	IF=50mA
Peak Wavelength	λp		940		nm	IF=50mA
Spectrum Line Half Width	Δλ		45		nm	IF=50mA



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

