

# **GaAlAs T-1 PACKAGE INFRARED EMITTING DIODE**


**MIE-324L3**

## **Description**

The MIE-324L3 is an infrared emitting diode in GaAlAs on GaAlAs technology molded in water clear plastic package.

## **Package Dimensions**

Unit : mm (inches )

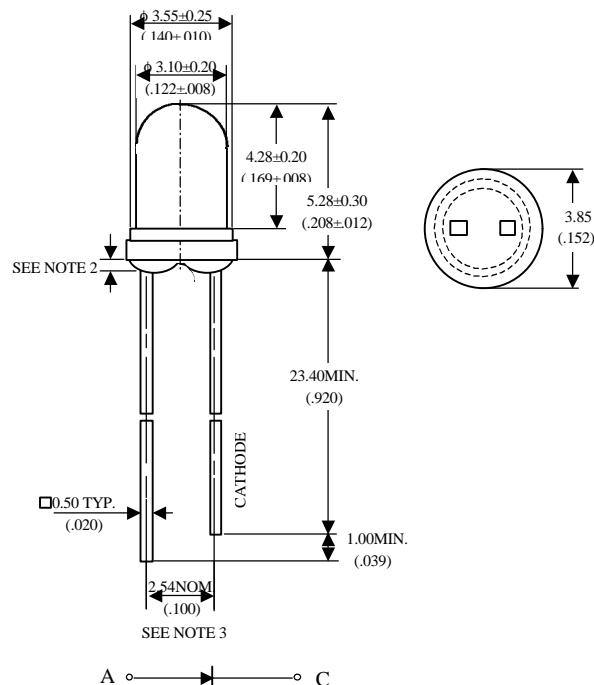

## **Features**

- High radiant power and high radiant intensity
- Suitable for DC and high pulse current operation
- Standard T-1 ( $\phi 3\text{mm}$ ) package, radiant angle:  $40^\circ$
- Peak wavelength  $\lambda_p = 880$  nm
- Good spectral matching to si-photodetector

### Notes :

1. Tolerance is  $\pm 0.25$  mm ( $.010$ ") unless otherwise noted.
2. Protruded resin under flange is  $1.5$  mm ( $.059$ ") max.
3. Lead spacing is measured where the leads emerge from the package.

## **Absolute Maximum Ratings**

@  $T_A=25^\circ\text{C}$

Parameter	Maximum Rating	Unit
Power Dissipation	120	mW
Peak Forward Current(300pps,10μs pulse)	1	A
Continuos Forward Current	100	mA
Reverse Voltage	5	V
Operating Temperature Range	$-55^\circ\text{C}$ to $+100^\circ\text{C}$	
Storage Temperature Range	$-55^\circ\text{C}$ to $+100^\circ\text{C}$	
Lead Soldering Temperature	$260^\circ\text{C}$ for 5 seconds	



Unity Opto Technology Co., Ltd.

02/04/2002

## Optical-Electrical Characteristics

@  $T_A=25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Min.	Typ .	Max.	Unit
Radiant Intensity	$I_F=20\text{mA}$	$I_e$		1.5		$\text{mW}/\text{sr}$
Forward Voltage	$I_F=50\text{mA}$	$V_F$		1.4	1.7	V
Reverse Current	$V_R=5\text{V}$	$I_R$			100	$\mu\text{A}$
Peak Wavelength	$I_F=20\text{mA}$	$\lambda_p$		880		nm
Spectral Bandwidth	$I_F=20\text{mA}$	$\Delta\lambda$		80		nm
View Angle	$I_F=20\text{mA}$	$2\theta_{1/2}$		40		deg .

## Typical Optical-Electrical Characteristic Curves

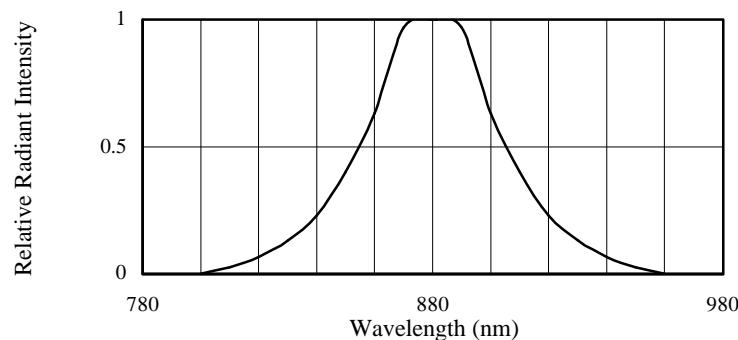


FIG.1 SPECTRAL DISTRIBUTION

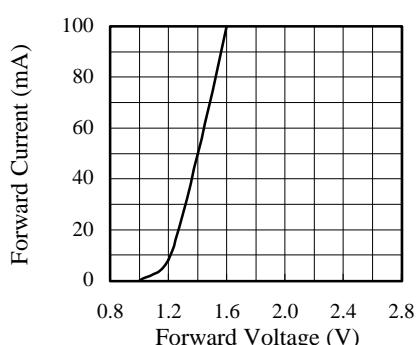


FIG.3 FORWARD CURRENT VS.  
FORWARD VOLTAGE

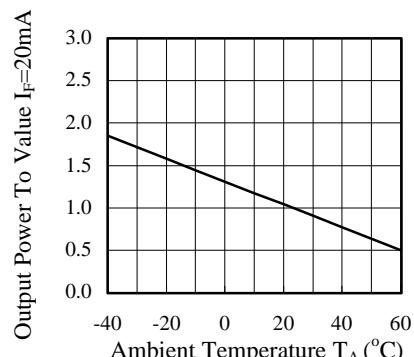


FIG.4 RELATIVE RADIANT INTENSITY  
VS. AMBIENT TEMPERATURE

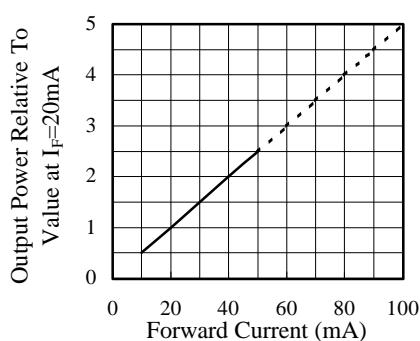


FIG.5 RELATIVE RADIANT INTENSITY  
VS. FORWARD CURRENT

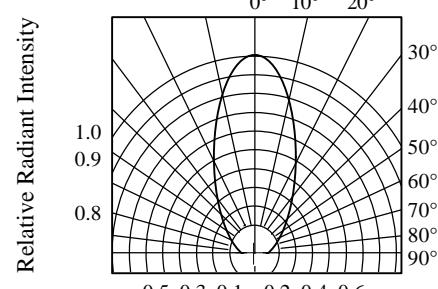


FIG.5 RADIATION DIAGRAM