
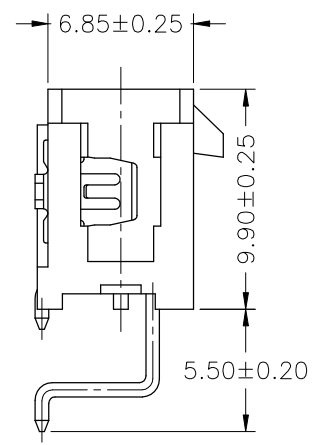


P.C.B LAYOUT

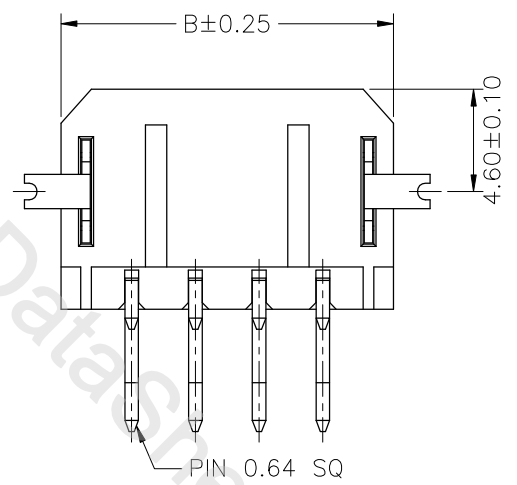

SPECIFICATIONS

Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Solder Tabs: Brass/Tin-plated
 Material: Nylon 6T,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
MIF-PWE-2X01	---	6.65
MIF-PWE-2X02	3.00	9.65
MIF-PWE-2X03	6.00	12.65
MIF-PWE-2X04	9.00	15.65
MIF-PWE-2X05	12.00	18.65
MIF-PWE-2X06	15.00	21.65
MIF-PWE-2X07	18.00	24.65
MIF-PWE-2X08	21.00	27.65
MIF-PWE-2X09	24.00	30.65
MIF-PWE-2X10	27.00	33.65
MIF-PWE-2X11	30.00	36.65
MIF-PWE-2X12	33.00	39.65

MORE THAN ALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. MIF-PWE-2Xxx

DWG NO. MIF-PWE-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIPTION:

3.00mm PITCH
 90° WAFER, SMT TYPE, MICRO-FIT

AREA

REVISIONS

HK

DATE