

isc Silicon PNP Darlington Power Transistor

MJ4030

DESCRIPTION

- With TO-3 package
- Respectively complement to type MJ4035
- DARLINGTON
- High DC current gain

APPLICATIONS



- For use as output devices in complementary general purpose amplifier applications.

ABSOLUTE MAXIMUM RATINGS( $T_C=25^\circ C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-60	V
$V_{CEO}$	Collector-Emitter Voltage	-60	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current	-16	A
$I_B$	Base Current	-0.5	A
$P_C$	Collector Power Dissipation@ $T_C=25^\circ C$	150	W
$T_J$	Junction Temperature	200	$^\circ C$
$T_{stg}$	Storage Temperature	-55~200	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.17	$^\circ C/W$

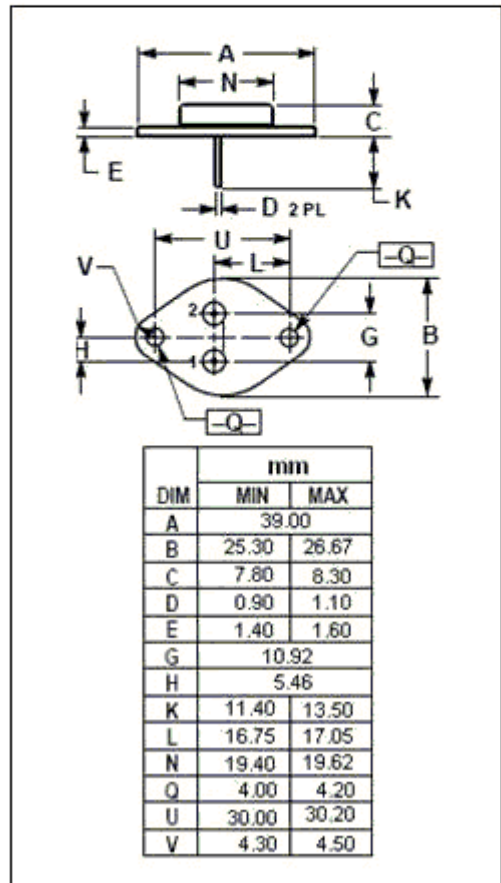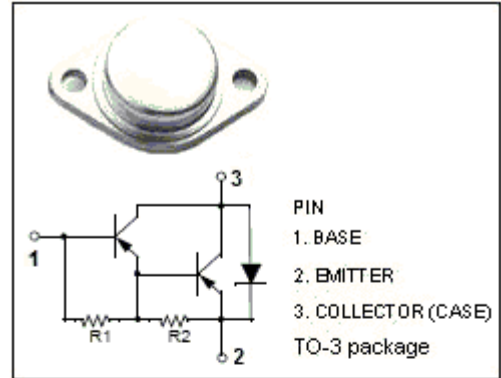

**isc Silicon PNP Darlington Power Transistor****MJ4030****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO}$	Collector-Emitter Breakdown Voltage	$I_C=-100\text{mA}; I_B=0$	-60		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=-10\text{A}; I_B=-40\text{mA}$		-2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=-16\text{A}; I_B=-80\text{mA}$		-4	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=-5\text{A}; I_B=-400\text{mA}$		-3	V
$V_{BE(on)}$	Base-Emitter On voltage	$I_C=-10\text{A}; V_{CE}=-3\text{V}$		-3	V
$I_{CER}$	Collector Cutoff Current	$V_{CB}=-60\text{V}; R_{BE}=1\text{K}\Omega;$ $V_{CB}=-60\text{V}; R_{BE}=1\text{K}\Omega; T_C=150^{\circ}\text{C}$		-1 -5	mA
$I_{CEO}$	Collector Cutoff current	$V_{CE}=-30\text{V}; I_B=0$		-3	mA
$I_{EBO}$	Emitter Cut-off current	$V_{EB}=-5\text{V}; I_C=0$		-5	mA
$h_{FE}$	DC Current Gain	$I_C=-10\text{A}; V_{CE}=-3\text{V}$	1000		