

MJE13004P1

Rev.F Mar.-2016

描述 / Descriptions

TO-92 塑封封装 NPN 半导体三极管。Silicon NPN transistor in a TO-92 Plastic Package.

特征 / Features

耐压高，快速转换。


High Voltage Capability High Speed Switching.

用途 / Applications

主要用于节能灯、日光灯电子镇流器及其它开关、振荡电路。

High frequency electronic lighting ballast applications, converters, inverters, switching regulators, etc.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : Base

PIN 2 : Collector

PIN 3 : Emitter

放大及印章代码 / hFE Classifications & Marking

见印章说明。See Marking Instructions.







极限参数 / Absolute Maximum Ratings(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 数值 Rating | 单位 Unit |
|--------------------------------|-----------------------------|--------------|------------|
| Collector to Base Voltage | V_{CBO} | 700 | V |
| Collector to Emitter Voltage | V_{CEO} | 400 | V |
| Emitter to Base Voltage | V_{EBO} | 9 | V |
| Collector Current - Continuous | I_C | 3 | A |
| Collector Power Dissipation | P_C | 1.2 | W |
| Collector Power Dissipation | $P_C(T_c=25^\circ\text{C})$ | 2.8 | W |
| Junction Temperature | T_j | 150 | °C |
| Storage Temperature Range | T_{stg} | -55~150 | °C |

电性能参数 / Electrical Characteristics(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 测试条件 Test Conditions | 最小值 Min | 典型值 Typ | 最大值 Max | 单位 Unit |
|---|---------------|--|------------|------------|------------|---------------|
| Collector to Base Breakdown Voltage | V_{CBO} | $I_C=1\text{mA}$ $I_E=0$ | 700 | | | V |
| Collector to Emitter Breakdown Voltage | V_{CEO} | $I_C=10\text{mA}$ $I_B=0$ | 400 | | | V |
| Emitter to Base Breakdown Voltage | V_{EBO} | $I_E=1\text{mA}$ $I_C=0$ | 9 | | | V |
| Collector Cut-Off Current | I_{CBO} | $V_{CB}=700\text{V}$ $I_E=0$ | | | 0.1 | mA |
| Collector cut-off current | I_{CEO} | $V_{CE}=400\text{V}$ $I_B=0$ | | | 0.1 | mA |
| Emitter Base Cut-Off Current | I_{EBO} | $V_{EB}=9.0\text{V}$ $I_C=0$ | | | 0.1 | mA |
| DC Current Gain | h_{FE} | $V_{CE}=5\text{V}$ $I_C=1\text{A}$ | 10 | | 40 | |
| Collector to Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=1\text{A}$ $I_B=0.2\text{A}$ | | | 0.6 | V |
| Base to Emitter Saturation Voltage | $V_{BE(sat)}$ | $I_C=1\text{A}$ $I_B=0.2\text{A}$ | | | 1.5 | V |
| Transition Frequency | f_T | $V_{CE}=10\text{V}$ $I_C=0.1\text{A}$ $f=1.0\text{MHz}$ | 5.0 | | | MHz |
| Fall time | t_f | $V_{CE}=5\text{V}$ $I_C=0.5\text{A}$ (UI9600) | | | 1.0 | μs |
| Storage time | t_s | | | | 5.0 | μs |


电参数曲线图 / Electrical Characteristic Curve

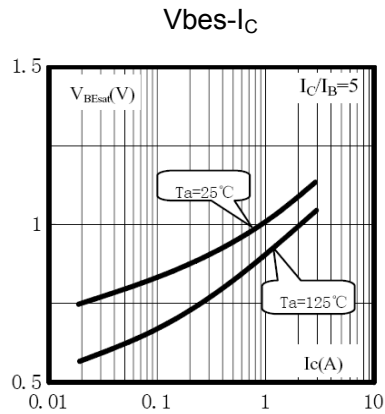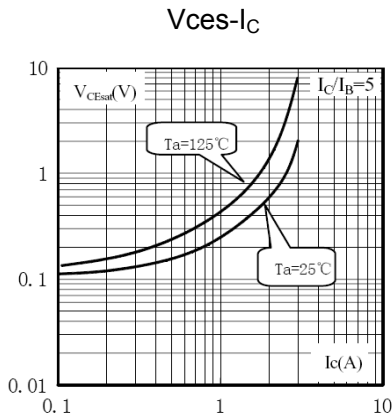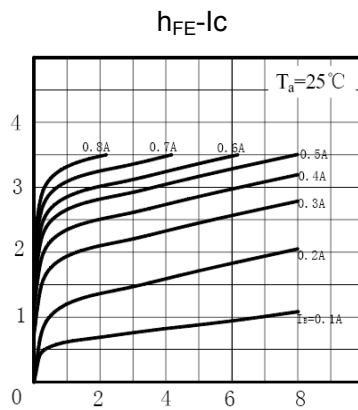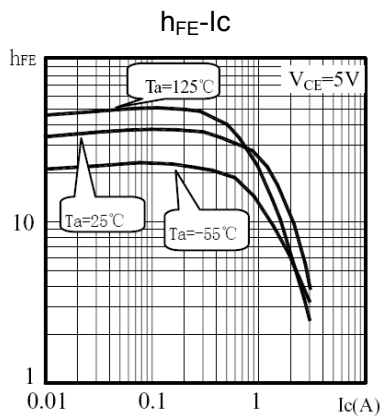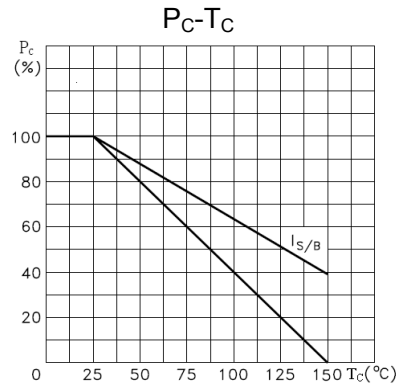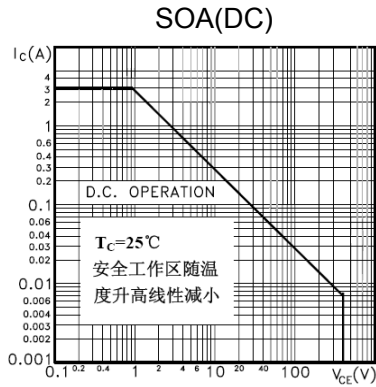

外形尺寸图 / Package Dimensions


TO-92

Unit: mm

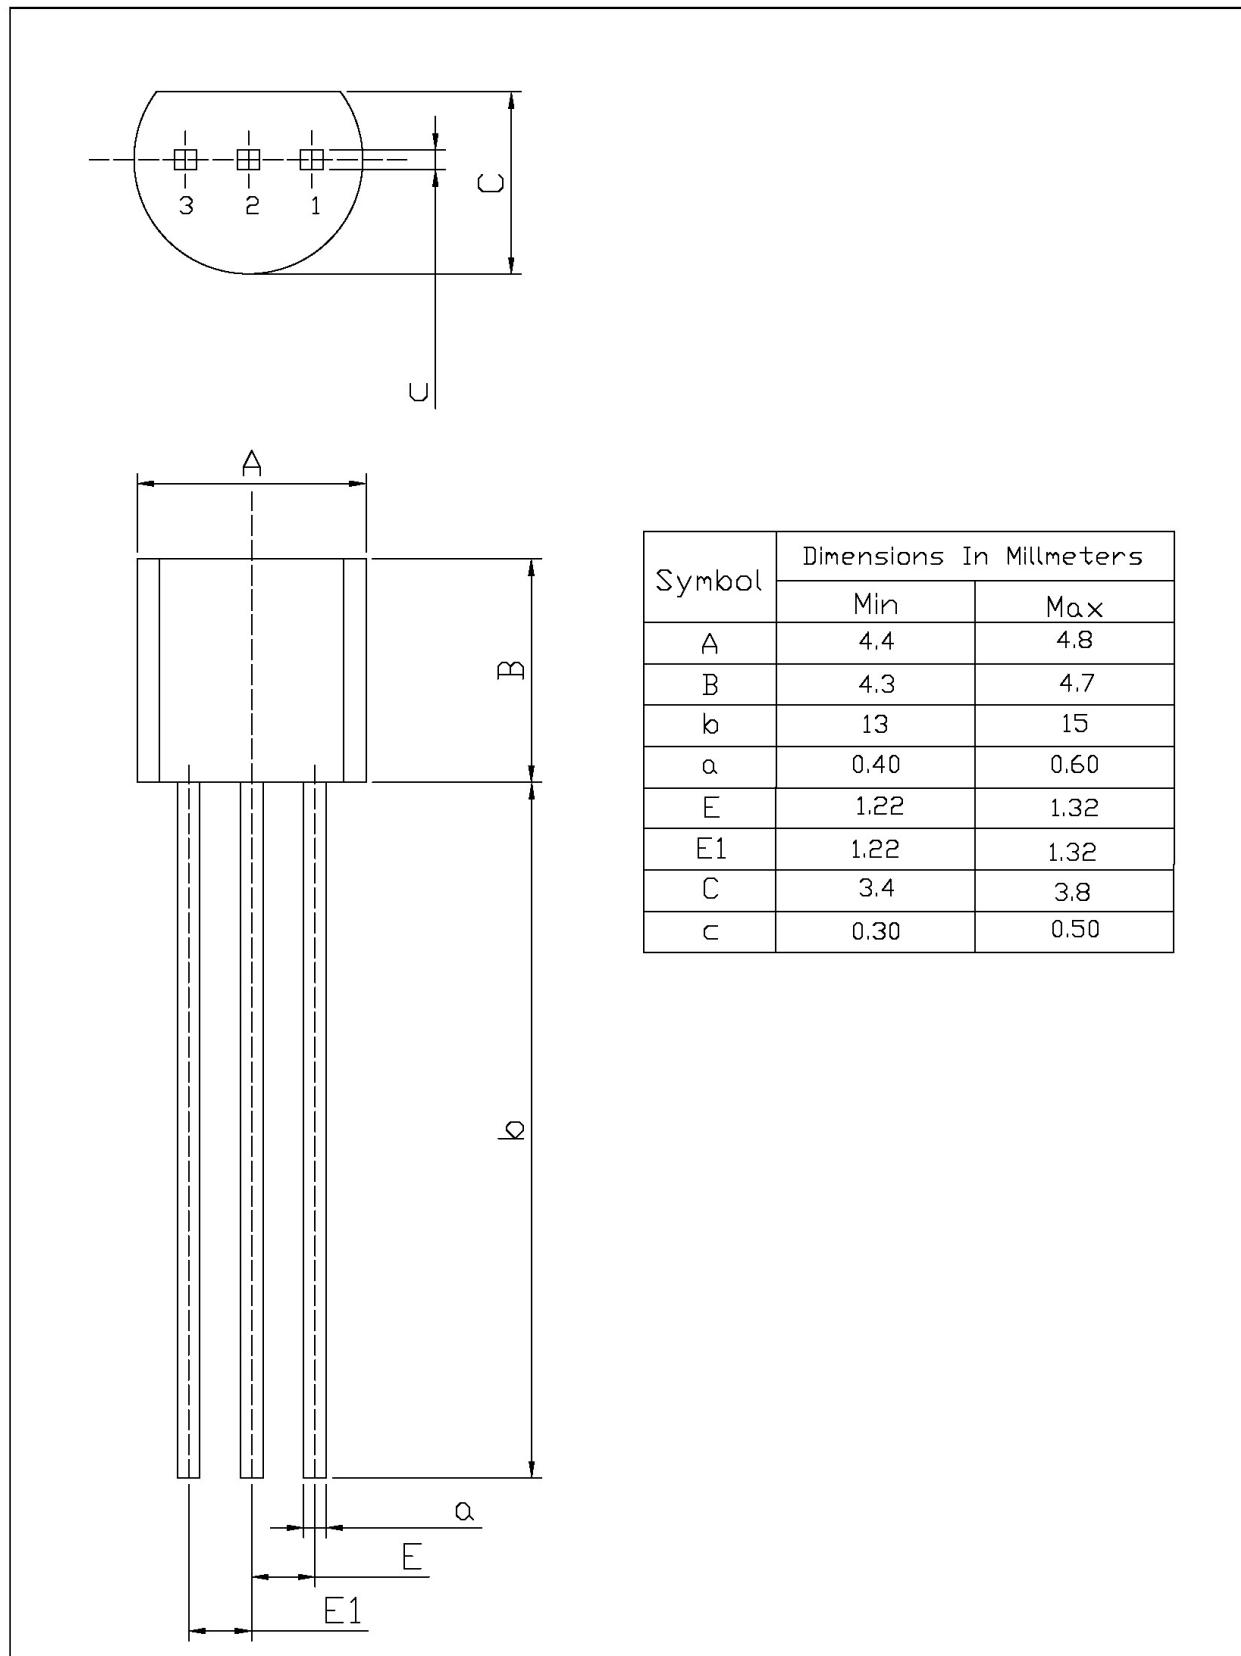

| Symbol | Dimensions In Millimeters | |
|--------|---------------------------|------|
| | Min | Max |
| A | 4.4 | 4.8 |
| B | 4.3 | 4.7 |
| b | 13 | 15 |
| a | 0.40 | 0.60 |
| E | 1.22 | 1.32 |
| E1 | 1.22 | 1.32 |
| C | 3.4 | 3.8 |
| c | 0.30 | 0.50 |

印章说明 / Marking Instructions

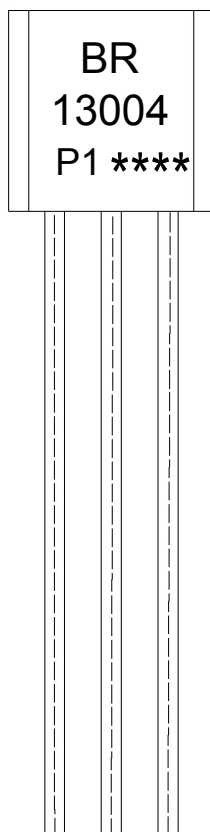

说明：

BR: 为公司代码

13004 : 为型号代码

P1: 规格代码

**** : 为生产批号代码，随生产批号变化。

Note:

BR: Company Code.

13004: Product Type.

P1: Specification Code.

****: Lot No. Code,code change with Lot No.

波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)



说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：270±5°C

时间：10±1 sec.

Temp:270±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

散件包装 / BULK

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm3) | | |
|----------------------|------------------|-----------------------|------------------------|------------------------------|------------------------|----------------------------|-------------|-------------|
| | Units/Bag 只/袋 | Bags/Inner Box 袋/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Bag 袋 | Inner Box 盒 | Outer Box 箱 |
| TO-92 | 1,000 | 10 | 10,000 | 5 | 50,000 | 135×190 | 237×172×102 | 560×245×195 |
| | 1,000 | 10 | 10,000 | 10 | 100,000 | 135×190 | 237×172×102 | 560×245×375 |

编带包装 / AMMO

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm3) | |
|----------------------|--------------------|------------------------|-------------------------|------------------------------|------------------------|----------------------------|-----------------------------------|
| | Units/tape 只/纸带 | Tape/Inner Box 纸带/盒 | Rows/Inner Box 纸带层/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Inner Box 盒 | Outer Box 箱 |
| TO-92 | 3,000 | 1 | 120 | 10 | 30,000 | 328×230×42 | 小箱 480×346×235, 大箱 547×407×268 |

使用说明 / Notices