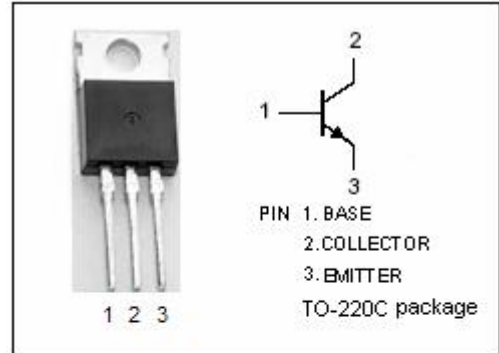


**isc Silicon NPN Power Transistor**
**MJE18006**
**DESCRIPTION**


- Collector-Base Breakdown Voltage-  
:  $V_{(BR)CBO} = 1000V(\text{Min})$
- High Switching Speed
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

**APPLICATIONS**

- Designed for use in 220V line-operated switchmode power supplies and electronic light ballasts


**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	1000	V
$V_{CEO}$	Collector-Emitter Voltage	450	V
$V_{EBO}$	Emitter-Base Voltage	9	V
$I_C$	Collector Current -Continuous	6	A
$I_{CM}$	Collector Current-Peak	15	A
$I_B$	Base Current	4	A
$I_{BM}$	Base Current-Peak	8	A
$P_D$	Total Power Dissipation@ $T_c=25^\circ\text{C}$	100	W
$T_j$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-65~150	$^\circ\text{C}$

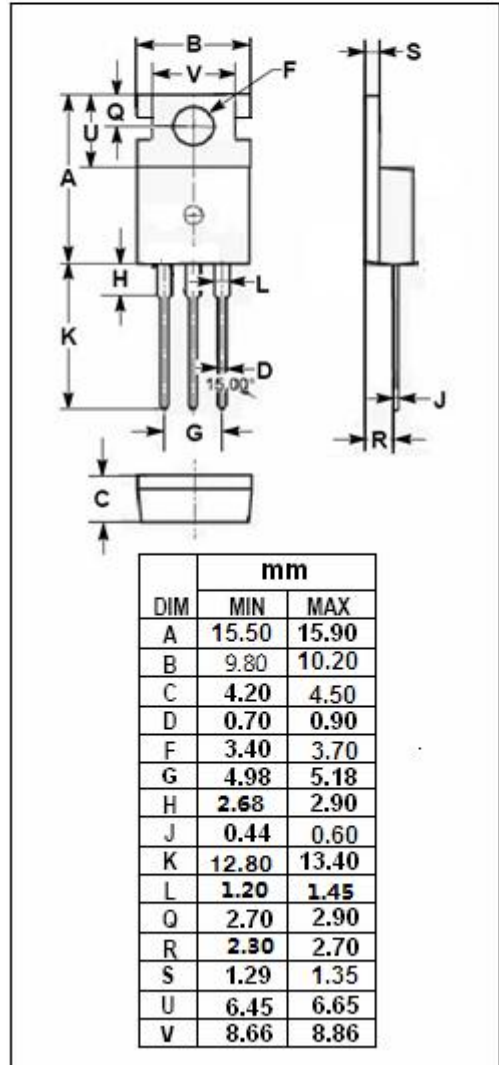
**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{thj-c}$	Thermal Resistance, Junction to Case	1.25	$^\circ\text{C/W}$
$R_{thj-a}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C/W}$

**isc Silicon NPN Power Transistor**
**MJE18006**
**ELECTRICAL CHARACTERISTICS**
**T<sub>j</sub>=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>CE0(SUS)</sub>	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 30mA; I <sub>B</sub> = 0	450			V
V <sub>CE(sat)-1</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 1.5 A ;I <sub>B</sub> = 0.15A T <sub>C</sub> =125°C			0.6 0.65	V
V <sub>CE(sat)-2</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 3A ;I <sub>B</sub> = 0.6A T <sub>C</sub> =125°C			0.7 0.8	V
V <sub>BE(sat)-1</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = 1.5A; I <sub>B</sub> = 0.15A			1.2	V
V <sub>BE(sat)-2</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = 3A; I <sub>B</sub> = 0.6A			1.3	V
I <sub>CES</sub>	Collector Cutoff Current	V <sub>CE</sub> =RatedV <sub>CE</sub> ; V <sub>EB</sub> = 0 T <sub>C</sub> =125°C			0.1 0.5	mA
		V <sub>CE</sub> = 800V T <sub>C</sub> =125°C			0.1	
I <sub>CEO</sub>	Collector Cutoff Current	V <sub>CE</sub> = RatedV <sub>CE0</sub> ; I <sub>B</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter Cutoff current	V <sub>EB</sub> = 9V; I <sub>C</sub> =0			0.1	mA
h <sub>FE-1</sub>	DC Current Gain	I <sub>C</sub> = 0.5A ; V <sub>CE</sub> = 5V	14		34	
h <sub>FE-2</sub>	DC Current Gain	I <sub>C</sub> = 3A ; V <sub>CE</sub> = 1V	6			
h <sub>FE-3</sub>	DC Current Gain	I <sub>C</sub> = 1.5 A ; V <sub>CE</sub> = 1V	11			
h <sub>FE-4</sub>	DC Current Gain	I <sub>C</sub> = 10mA; V <sub>CE</sub> = 5V	10			
f <sub>T</sub>	Current-Gain—Bandwidth Product	I <sub>C</sub> = 0.5A; V <sub>CE</sub> =10V; f <sub>test</sub> =1.0MHZ		14		MHz
C <sub>OB</sub>	Output Capacitance	I <sub>E</sub> = 0; V <sub>CB</sub> = 10V; f <sub>test</sub> =1.0MHz		75		pF

Switching Times Resistive Load,Duty Cycle≤10%,Pulse Width=20 μ s

t <sub>on</sub>	Turn-on Time	V <sub>CC</sub> = 300V ,I <sub>C</sub> = 3A I <sub>B1</sub> = 0.6A; I <sub>B2</sub> = 1.5A		90	180	ns
t <sub>off</sub>	Turn-off Time			1.7	2.5	μ s
t <sub>on</sub>	Turn-on Time	V <sub>CC</sub> = 300V ,I <sub>C</sub> = 1.3A I <sub>B1</sub> = 0.13A; I <sub>B2</sub> = 0.65A		0.2	0.3	μ s
t <sub>off</sub>	Turn-off Time			1.2	2.5	μ s

**isc Silicon NPN Power Transistor****MJE18006****NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

