

Silicon PNP Power Transistors

MJF45H11

DESCRIPTION

www.datasheet4u.com

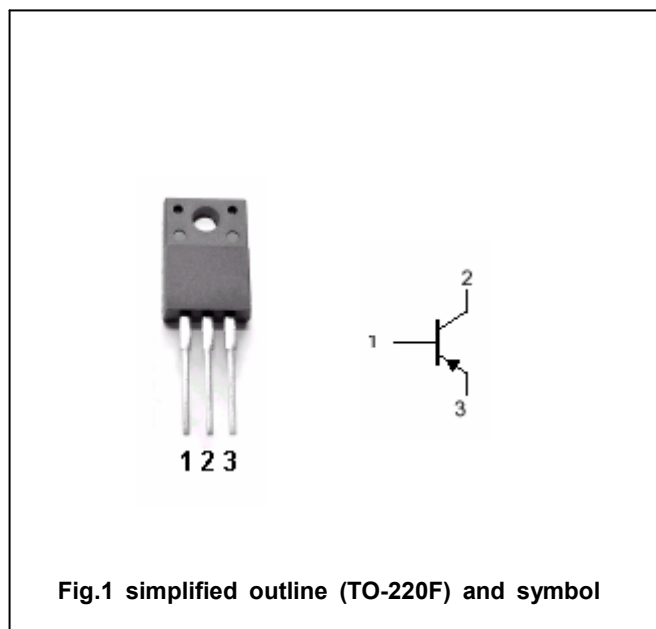
- With TO-220F package
- Fast switching speeds
- Low collector saturation voltage
- Complement to type MJF44H11

APPLICATIONS

- For general purpose power amplification and switching regulators, converters and power amplifiers applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

ABSOLUTE MAXIMUM RATINGS($T_c=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-80	V
V_{CEO}	Collector-emitter voltage	Open base	-80	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current (DC)		-10	A
I_{CM}	Collector current-Peak		-20	A
P_D	Total power dissipation	$T_c=25^\circ\text{C}$	36	W
		$T_a=25^\circ\text{C}$	2.0	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-C}$	Thermal resistance from junction to case	3.5	$^\circ\text{C}/\text{W}$
$R_{th\ j-A}$	Thermal resistance from junction to ambient	62.5	$^\circ\text{C}/\text{W}$

Silicon PNP Power Transistors

MJF45H11

CHARACTERISTICS

Tj=25°C unless otherwise specified

www.datasheet4u.com

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-emitter sustaining voltage	$I_C=-30mA$ $I_B=0$,	-80			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=-8A$; $I_B=-0.4A$			-1.0	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C=-8A$; $I_B=-0.8A$			-1.5	V
I_{CES}	Collector cut-off current	$V_{CE}=\text{Rated } BV_{CEO}$; $V_{BE}=0$			-10	μA
I_{EBO}	Emitter cut-off current	$V_{EB}=-5V$; $I_C=0$			-10	μA
h_{FE-1}	DC current gain	$I_C=-2A$; $V_{CE}=-1V$	60			
h_{FE-2}	DC current gain	$I_C=-4A$; $V_{CE}=-1V$	40			
f_T	Transition frequency	$I_C=-0.5A$; $V_{CE}=-10V$, $f=20MHz$		40		MHz
C_{cb}	Collector capacitance	$f=1MHz$; $V_{CB}=-10V$		230		pF

Switching times

t_{on}	Turn-on time	$I_C=-5A$ $I_{B1}=-I_{B2}=-0.5A$		0.3		μs
t_s	Storage time			0.5		μs
t_f	Fall time			0.14		μs

MJF45H11

www.datasheet4u.com

