

FEATURES

- ▶ Industrial Standard 2"x1" Package
- ▶ Input Range 9-36VDC, 18-75VDC, 40-160VDC
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Temp. Range -40°C to +95°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Remote On/Off, Output Voltage Trim
- ▶ Conducted EMI meets EN55022 Class A & FCC Level A
- ▶ Vibration and Thermal Shock meets EN61373
- ▶ Cooling, Dry & Damp Heat Test meet IEC/EN60068
- ▶ Railway EMC Standard meets EN50121-3-2
- ▶ Railway Standard meets EN50155 (IEC60571)
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking (Pending)

NEW


PRODUCT OVERVIEW

The MINMAX MKZI10 series is a new range of high performance 10W isolated dc-dc converter within encapsulated 2"x1" package which specifically design for railway applications. There are 12 models available for railway input voltage of either 24(9~36)VDC or 48(18~75)VDC or 72/110(40~160)VDC and tight output voltage regulation. Further features include over current, over voltage, short circuit protection, remote ON/OFF, output trim and EMI filter meets EN55022 & FCC Part15 Class A as well. MKZI10 series conform to vibration and thermal shock test meets EN61373, cooling, dry and damp heat test meets IEC/EN 60068-2 and railway EMC standard EN50121-3-2 and complies also with railway standard EN50155 (IEC60571). MKZI10 series offer an highly reliable solution for critical applications in railway systems, battery-powered equipment, measure instrumentation and many critical applications.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load			@Max. Load
		VDC	VDC	mA	mA(typ.)	mA(typ.)	VDC	μF
MKZI10-24S05	24 (9 ~ 36)	5	2000	496	25	6.2	2200	84
MKZI10-24S12		12	830	483		15	330	86
MKZI10-24S15		15	670	481		18	220	87
MKZI10-24S24		24	417	474		27	100	88
MKZI10-48S05	48 (18 ~ 75)	5	2000	245	15	6.2	2200	85
MKZI10-48S12		12	830	239		15	330	87
MKZI10-48S15		15	670	241		18	220	87
MKZI10-48S24		24	417	242		27	100	86
MKZI10-110S05	110 (40 ~ 160)	5	2000	111	10	6.2	2200	82
MKZI10-110S12		12	830	107		15	330	85
MKZI10-110S15		15	670	107		18	220	85
MKZI10-110S24		24	417	107		27	100	85

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (100ms. max)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
	110V Input Models	-0.7	---	170	
Start-Up Threshold Voltage	24V Input Models	---	---	9	
	48V Input Models	---	---	18	
	110V Input Models	---	---	40	
Under Voltage Shutdown	24V Input Models	---	7.5	---	
	48V Input Models	---	16	---	
	110V Input Models	---	37	---	
Start Up Time	All Models	---	50	---	mS
Input Filter		Internal Pi Type			

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	0.5	---	mA
Control Input Current (off)	Vctrl = 0V	---	-0.5	---	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	2.5	---	mA

Output Specifications

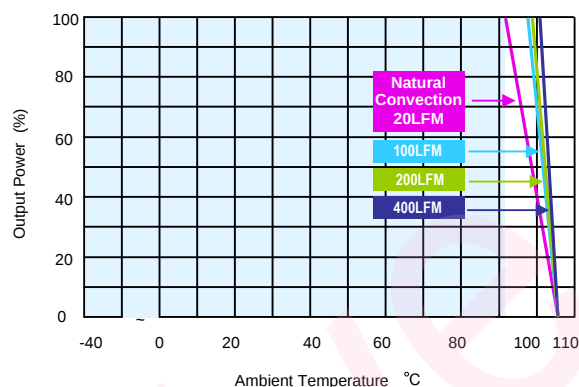
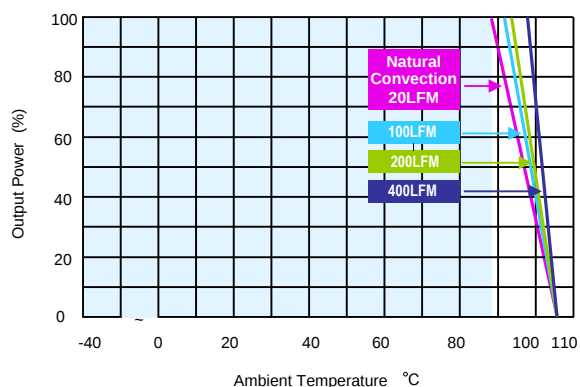
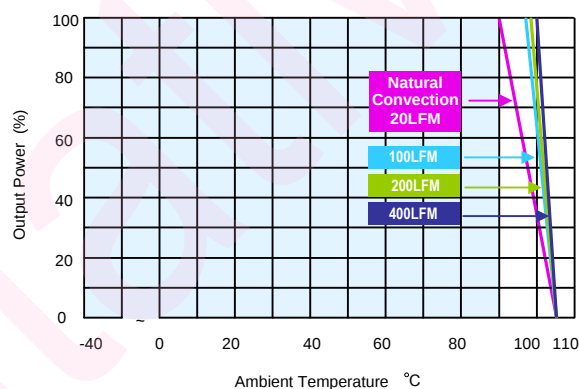
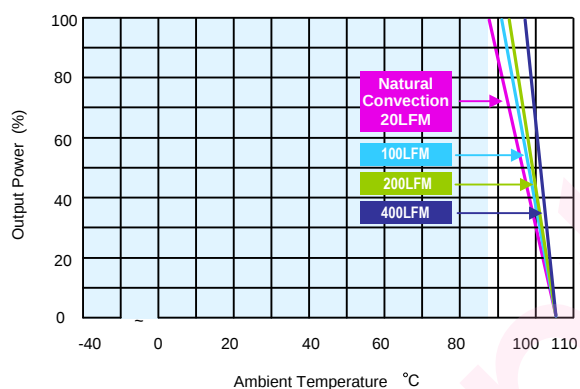
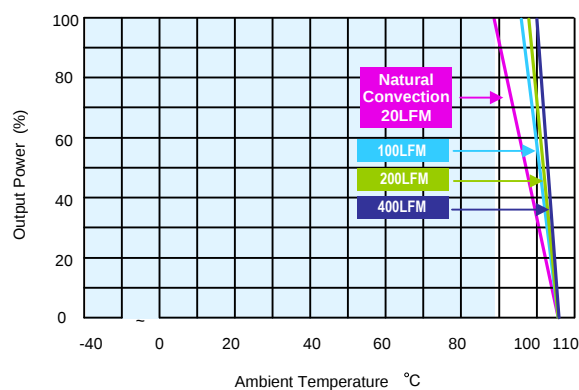
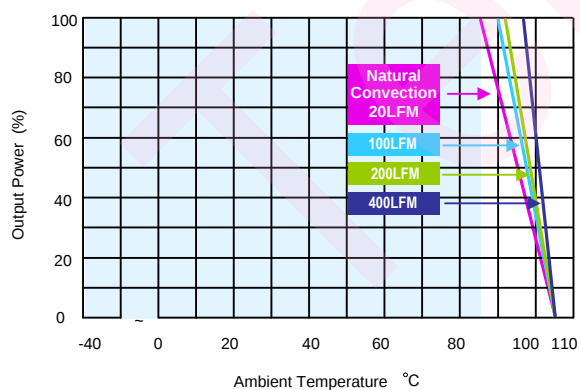
Parameter		Conditions		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy				---	---	±1.0	%
Line Regulation		Vin=Min. to Max. @ Full Load		---	---	±0.2	%
Load Regulation		Io=0% to 100%		---	---	±0.5	%
Minimum Load		No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	5Vo	Measured with a 10µF/25V MLCC	---	50	---	mV _{P-P}
		12Vo,15Vo		---	100	---	mV _{P-P}
		24Vo	Measured with a 4.7µF/50V MLCC	---	150	---	mV _{P-P}
Transient Recovery Time		25% Load Step Change ⁽²⁾		---	---	300	µsec
Transient Response Deviation				---	±3	±5	%
Temperature Coefficient				---	---	±0.02	%/°C
Trim Up / Down Range (See Page 8)		% of Nominal Output Voltage		---	---	±10	%
Over Load Protection		Current Limitation at 150% typ. of Iout max., Hiccup					
Short Circuit Protection		Hiccup Mode 0.7Hz typ. Automatic Recovery					

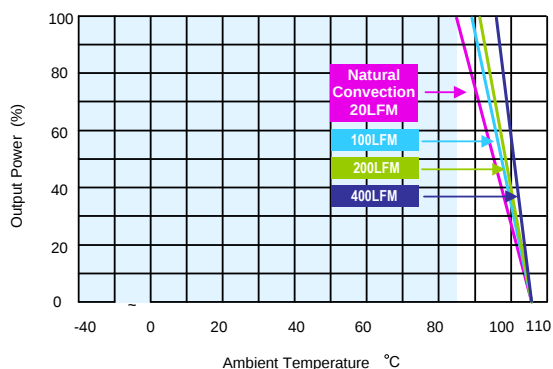
General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Reinforced Insulation, Rated For 60 Seconds	3000	---	---	VACrms
Isolation Voltage Input/Output to case		1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	1500	---	pF
Switching Frequency		---	320	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C Full Load, Ground Benign	TBD	---	---	Hours
Safety Approval (Pending)	UL/cUL 60950-1, IEC/EN 60950-1, EN50155, IEC60571				

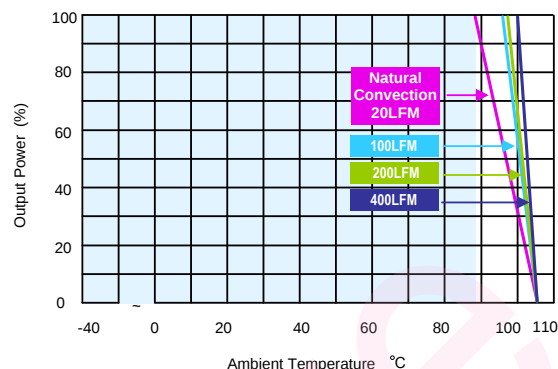
Environmental Specifications					
Parameter	Model/Conditions	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Ambient Temperature Range Natural Convection ⁽⁸⁾ Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MKZI10-24S24	-40	88	92	°C
	MKZI10-24S15, MKZI10-48S12		87	90	
	MKZI10-48S15		85	89	
	MKZI10-24S12, MKZI10-48S24		84	88	
	MKZI10-48S05, MKZI10-110S12		82	86	
	MKZI10-110S15, MKZI10-110S24		78	83	
	MKZI10-24S05		78	83	
Thermal Impedance	Natural Convection without Heatsink	12.1	---	---	°C/W
	Natural Convection with Heatsink	9.8	---	---	°C/W
	100LFM Convection without Heatsink	9.2	---	---	°C/W
	100LFM Convection with Heatsink	5.4	---	---	°C/W
	200LFM Convection without Heatsink	7.8	---	---	°C/W
	200LFM Convection with Heatsink	4.5	---	---	°C/W
	400LFM Convection without Heatsink	5.2	---	---	°C/W
	400LFM Convection with Heatsink	3.0	---	---	°C/W
Case Temperature		---	---	+105	°C
Storage Temperature Range		-50	---	+125	°C
Cooling Test	Compliance to IEC/EN60068-2-1				
Dry Heat	Compliance to IEC/EN60068-2-2				
Damp Heat	Compliance to IEC/EN60068-2-30				
Shock & Vibration Test	Compliance to IEC/EN 61373				
Humidity (non condensing)		---	95		% rel. H
RFI	Six-Sided Shielded, Metal Case				
Lead Temperature (1.5mm from case for 10Sec.)		---	260		°C

EMC Specifications			
Parameter	Standards & Level		Performance
General	Compliance with EN 50121-3-2 Railway Applications		
EMI	Conduction	EN55022, EN55011, FCC part 15	Class A
EMS	EN55024		
	ESD	EN61000-4-2 Air ± 8kV, Contact ± 6kV	A
	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient ⁽⁵⁾	EN61000-4-4 ±2kV	A
	Surge ⁽⁵⁾	EN61000-4-5 ±2kV	A
	Conducted immunity	EN61000-4-6 10Vrms	A

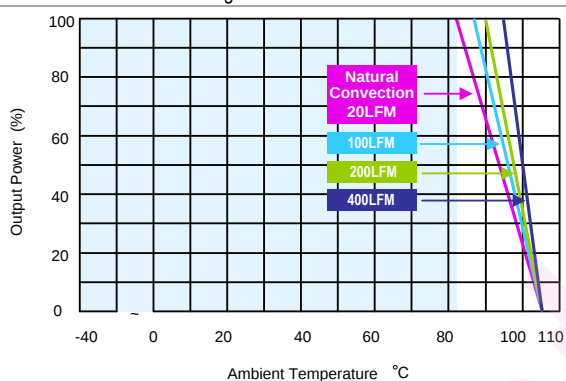
Power Derating Curve

MKZI10-24S24 Derating Curve without Heatsink
MKZI10-24S24 Derating Curve with Heatsink

MKZI10-24S15, MKZI10-48S12, MKZI10-48S15 Derating Curve without Heatsink
MKZI10-24S15, MKZI10-48S12, MKZI10-48S15 Derating Curve with Heatsink

MKZI10-24S12, MKZI10-48S24 Derating Curve without Heatsink
MKZI10-24S12, MKZI10-48S24 Derating Curve with Heatsink

Power Derating Curve


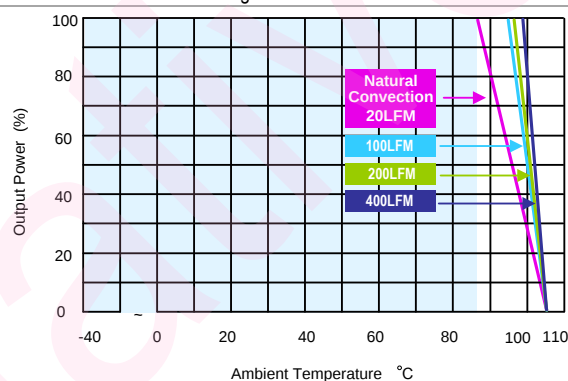
MKZI10-48S05, MKZI10-110S12, MKZI10-110S15, MKZI10-110S24
Derating Curve without Heatsink



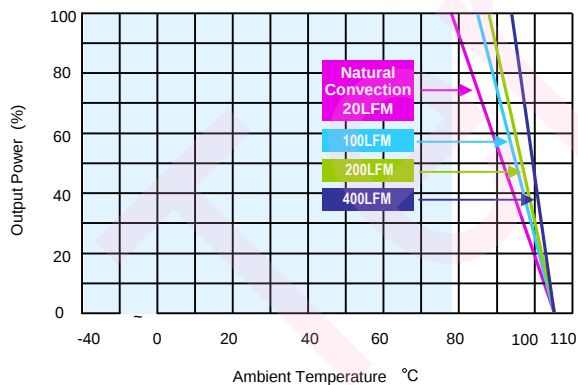
MKZI10-48S05, MKZI10-110S12, MKZI10-110S15, MKZI10-110S24
Derating Curve with Heatsink



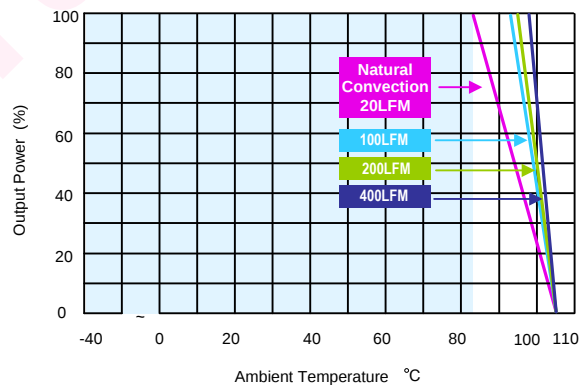
MKZI10-24S05 Derating Curve without Heatsink



MKZI10-24S05 Derating Curve with Heatsink



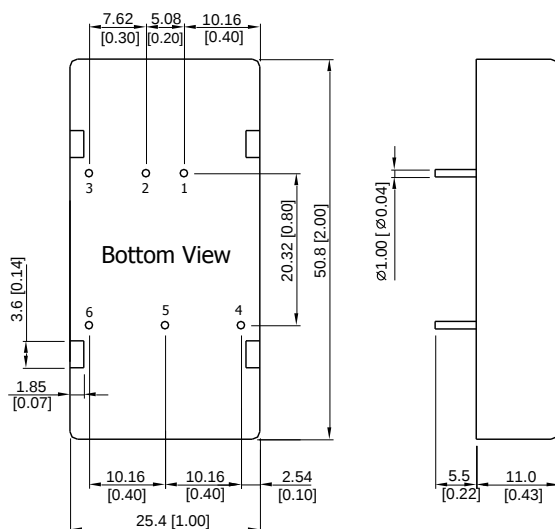
MKZI10-110S05 Derating Curve without Heatsink



MKZI10-110S05 Derating Curve with Heatsink

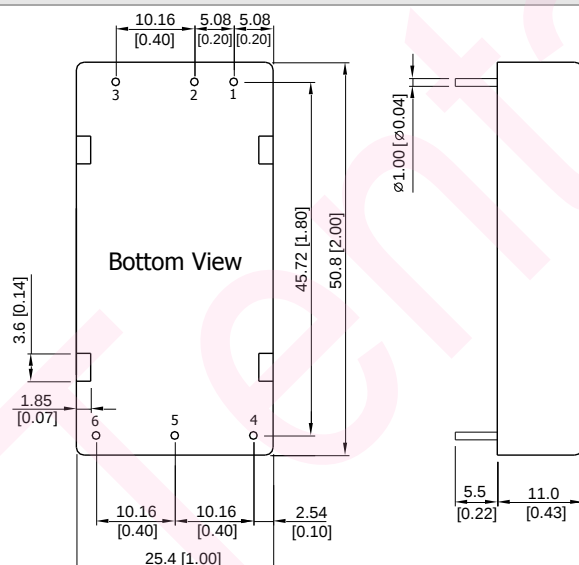
Notes

- 1 Specifications typical at $T_a = +25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN61000-4-4 & EN61000-4-5 an, external capacitor across the input pins is required. Suggested capacitor: 220 μF /400V.
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Function
1	+Vin
2	-Vin
3	Remote On/Off
4	+Vout
5	Trim
6	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04 ± 0.002)

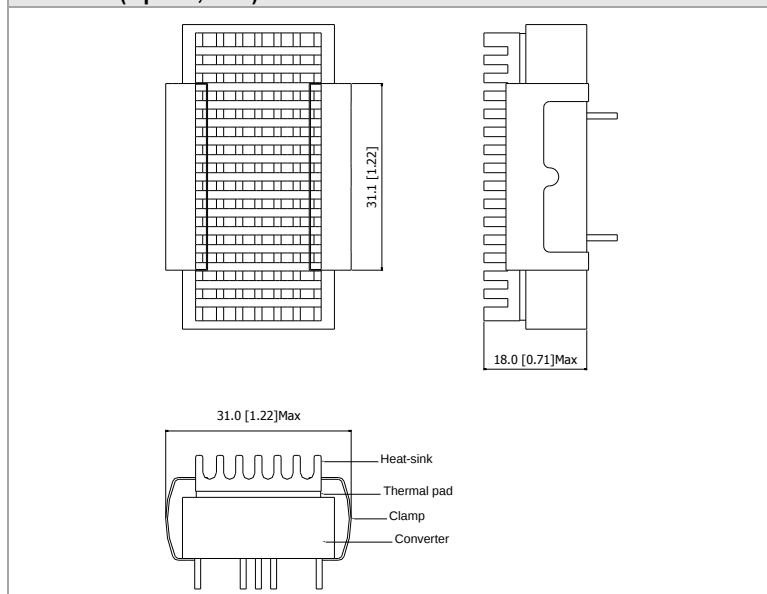
Package Specifications with "A" Pinning (order code suffix A)
Mechanical Dimensions

Pin Connections

Pin	Function
1	+Vin
2	-Vin
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04 ± 0.002)

Physical Characteristics

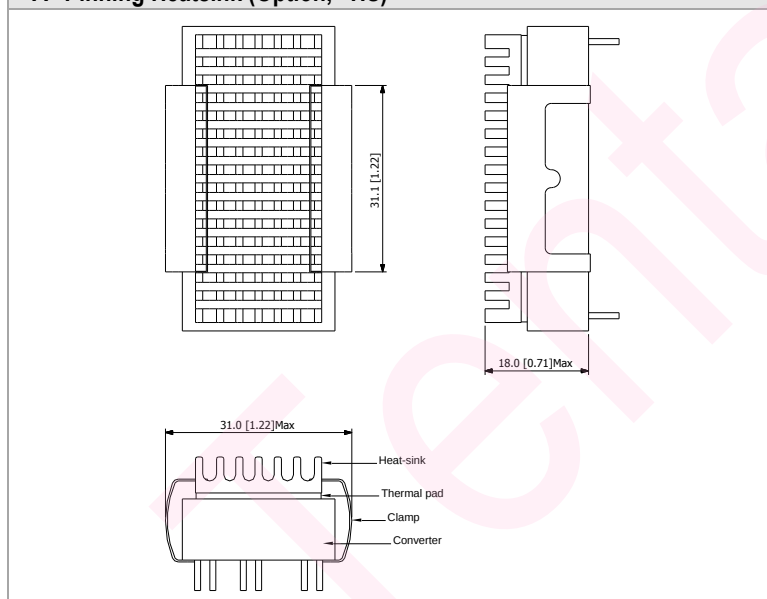
Case Size	: 50.8x25.4x11.0 mm (2.0x1.0x0.43 inches)
Case Material	: Aluminium Alloy, Black Anodized Coating
Base Material	: FR4 PCB (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Potting Material	: Epoxy (UL94-V0)
Weight	: TBD

Heatsink (Option, -HS)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 9g

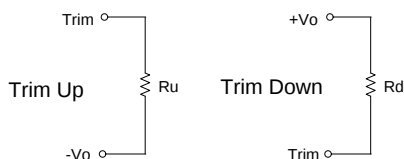
► The advantages of adding a heatsink are:

1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.

"A" Pinning Heatsink (Option, -HS)


External Output Trimming

Output can be externally trimmed by using the method shown below



MKZI10-XXS05 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	137.88	61.93	36.61	23.95	16.35	11.29	7.67	4.96	2.85	1.16	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	108.09	48.39	28.49	18.54	12.56	8.58	5.74	3.61	1.95	0.62	KOhms

MKZI10-XXS12 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	419.81	187.68	110.30	71.61	48.40	32.93	21.87	13.58	7.13	1.98	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	344.74	154.37	90.92	59.19	40.15	27.46	18.39	11.59	6.31	2.07	KOhms

MKZI10-XXS15 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	602.92	269.91	158.91	103.41	70.10	47.90	32.05	20.15	10.90	3.50	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	482.88	215.89	126.89	82.40	55.70	37.90	25.18	15.65	8.23	2.30	KOhms

MKZI10-XXS24 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	598.97	267.93	157.59	102.42	69.31	47.25	31.48	19.66	10.46	3.11	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	486.83	217.87	128.21	83.38	56.49	38.56	25.75	16.14	8.67	2.69	KOhms

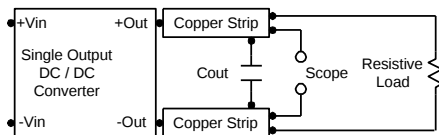
Order Code Table

Standard	With heatsink	With "A" Pinning	With "A" Pinning & heatsink
MKZI10-24S05	MKZI10-24S05-HS	MKZI10-24S05A	MKZI10-24S05A-HS
MKZI10-24S12	MKZI10-24S12-HS	MKZI10-24S12A	MKZI10-24S12A-HS
MKZI10-24S15	MKZI10-24S15-HS	MKZI10-24S15A	MKZI10-24S15A-HS
MKZI10-24S24	MKZI10-24S24-HS	MKZI10-24S24A	MKZI10-24S24A-HS
MKZI10-48S05	MKZI10-48S05-HS	MKZI10-48S05A	MKZI10-48S05A-HS
MKZI10-48S12	MKZI10-48S12-HS	MKZI10-48S12A	MKZI10-48S12A-HS
MKZI10-48S15	MKZI10-48S15-HS	MKZI10-48S15A	MKZI10-48S15A-HS
MKZI10-48S24	MKZI10-48S24-HS	MKZI10-48S24A	MKZI10-48S24A-HS
MKZI10-110S05	MKZI10-110S05-HS	MKZI10-110S05A	MKZI10-110S05A-HS
MKZI10-110S12	MKZI10-110S12-HS	MKZI10-110S12A	MKZI10-110S12A-HS
MKZI10-110S15	MKZI10-110S15-HS	MKZI10-110S15A	MKZI10-110S15A-HS
MKZI10-110S24	MKZI10-110S24-HS	MKZI10-110S24A	MKZI10-110S24A-HS

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.



Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100 μ A.

Overload Protection

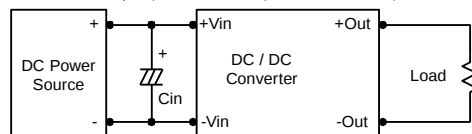
To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

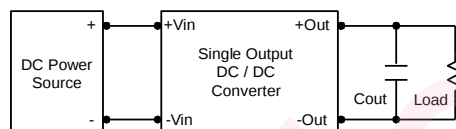
Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 33 μ F for the 12V input devices and a 10 μ F for the 24V and 48V devices.



Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.



Maximum Capacitive Load

The MKZI10 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

