

Electro-Optical Characteristics :

 $I_F @ 20\text{mA}, T_a 25^\circ\text{C}$

Code for Parts	Lighting Color	Material	V _F (V)		λ (nm)			I _v [*] (mcd)
			typ.	max.	λ _D	λ _P	Δλ	typ.
MLM-152 YG/YG	Yellow Green (YG)	GaP	2.2	2.6	572	570	30	9.5
	Yellow Green (YG)	GaP	2.2	2.6	572	570	30	9.5
MLM-152 Y/Y	Yellow (Y)	GaAsP	2.1	2.6	590	589	40	8.0
	Yellow (Y)	GaAsP	2.1	2.6	590	589	40	8.0
MLM-152 SD/YG	Super Bright Orange (SD)	GaAsP	2.1	2.6	532	642	40	10.0
	Yellow Green (YG)	GaP	2.2	2.6	572	570	30	9.5

*NIST standards

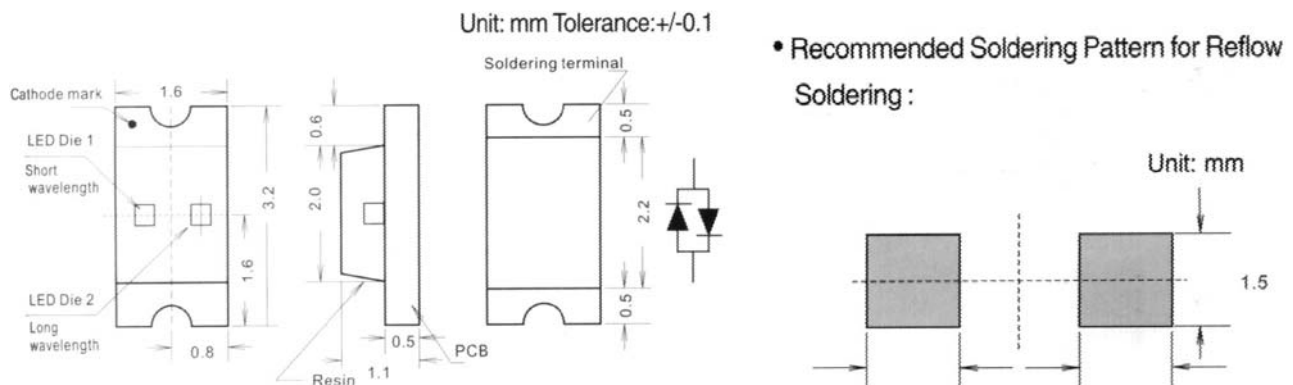
Absolute Maximum Ratings :

(T_a=25°C)

Series	P _d (mW)	I _F (mA)	I _{FP} (mA)	V _R (V)	T _{OP} (°C)	T _{ST} (°C)
MLM-152 Series	65	25	100**	5	-30 to +80	-40 to +85

**Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width

Package Outline Dimensions :



- Soldering terminal may shift in x, y direction.
- Both dice in the package need to be either P-side up or N-side up

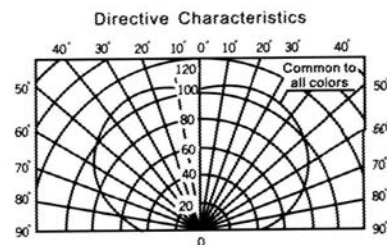
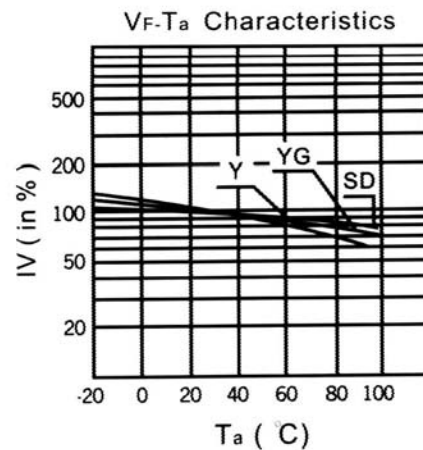
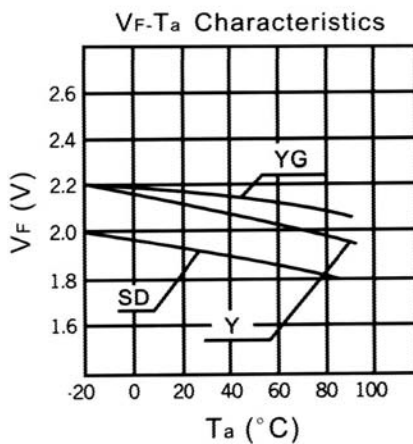
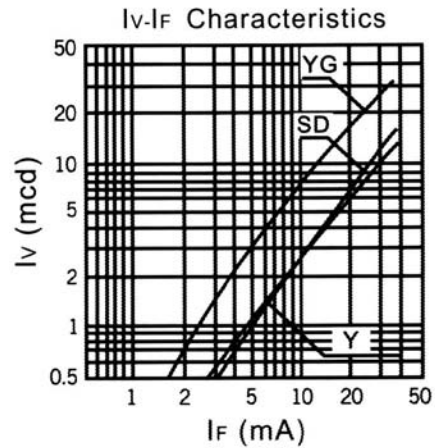
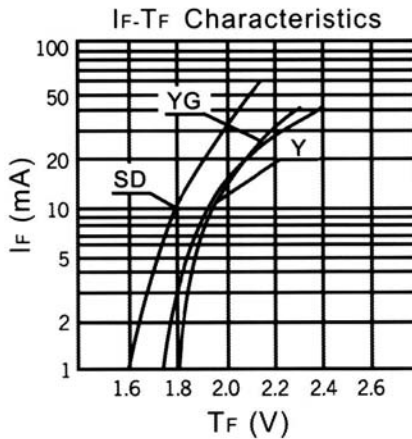

MICRO ELECTRONICS LTD.

G/F, 38 Hung To Road, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. BOX 69477, Hong Kong. TEL: (852) 23430181 FAX: (852) 23410321

 HOMEPAGE: <http://www.microelectr.com.hk> E-MAIL ADDRESS: common@microelectr.com.hk

Characteristics of MLM-152 Series :



MICRO ELECTRONICS LTD.

G/F, 38 Hung To Road, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. BOX 69477, Hong Kong. TEL: (852) 23430181 FAX: (852) 23410321

HOME PAGE: <http://www.microelectr.com.hk> E-MAIL ADDRESS: common@microelectr.com.hk