


PNP Transistors

MMBT2907A (KMBT2907A)

■ Features

- Epitaxial Planar Die Construction
- Complementary NPN Type Available(MMBT2222A)

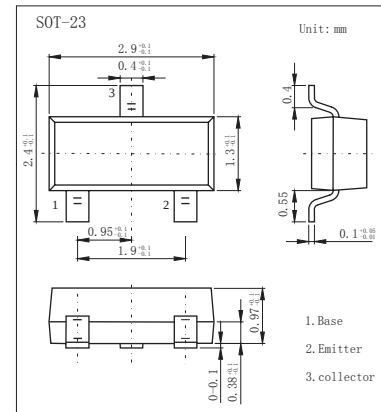

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	-60	V
Collector - Emitter Voltage	V_{CE0}	-60	
Emitter - Base Voltage	V_{EB0}	-5	
Collector Current - Continuous	I_C	600	mA
Power Dissipation	P_D	250	mW
Thermal resistance from junction to ambient	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -100\ \mu\text{A}$, $I_E = 0$	-60		V
Collector-Emitter Breakdown Voltage*	$V_{(BR)CEO}$	$I_C = -10\ \text{mA}$, $I_B = 0$	-60		V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -100\ \mu\text{A}$, $I_C = 0$	-5		V
Collector Cutoff Current	I_{CBO}	$V_{CB} = -50\ \text{V}$, $I_E = 0$		-20	nA
Collector Cutoff Current	I_{CEX}	$V_{CE} = -30\ \text{V}$, $V_{EB(off)} = -0.5\ \text{V}$		-50	nA
DC Current Gain	h_{FE}	$V_{CE} = -10\ \text{V}$, $I_C = -0.1\ \text{mA}$	75		
		$V_{CE} = -10\ \text{V}$, $I_C = -1\ \text{mA}$	100		
		$V_{CE} = -10\ \text{V}$, $I_C = -10\ \text{mA}$	100		
		$V_{CE} = -10\ \text{V}$, $I_C = -150\ \text{mA}$	100	300	
		$V_{CE} = -10\ \text{V}$, $I_C = -500\ \text{mA}$	50		
Collector-Emitter Saturation Voltage *	$V_{CE(sat)}$	$I_C = -150\ \text{mA}$, $I_B = -15\ \text{mA}$		-0.4	V
		$I_C = -500\ \text{mA}$, $I_B = -50\ \text{mA}$		-1.6	V
Base-Emitter Saturation Voltage *	$V_{BE(sat)}$	$I_C = -150\ \text{mA}$, $I_B = -15\ \text{mA}$		-1.3	V
		$I_C = -500\ \text{mA}$, $I_B = -50\ \text{mA}$		-2.6	V
Current Gain - Bandwidth Product	f_T	$V_{CE} = -20\ \text{V}$, $I_C = -50\ \text{mA}$, $f = 100\ \text{MHz}$	200		MHz
Delay Time	t_d	$V_{CC} = -30\ \text{V}$, $I_C = -150\ \text{mA}$, $I_{B1} = -15\ \text{mA}$		10	ns
Rise Time	t_r			40	ns
Storage Time	t_s	$V_{CC} = -6.0\ \text{V}$, $I_C = -150\ \text{mA}$, $I_{B1} = I_{B2} = -15\ \text{mA}$		80	ns
Fall Time	t_f			30	ns

* Pulse test: Pulse width $\leq 300\ \mu\text{s}$, duty cycle $\leq 2.0\%$


■ Marking

Marking	W2F
---------	-----


PNP Transistors

MMBT2907A (KMBT2907A)

■ Typical Characteristics

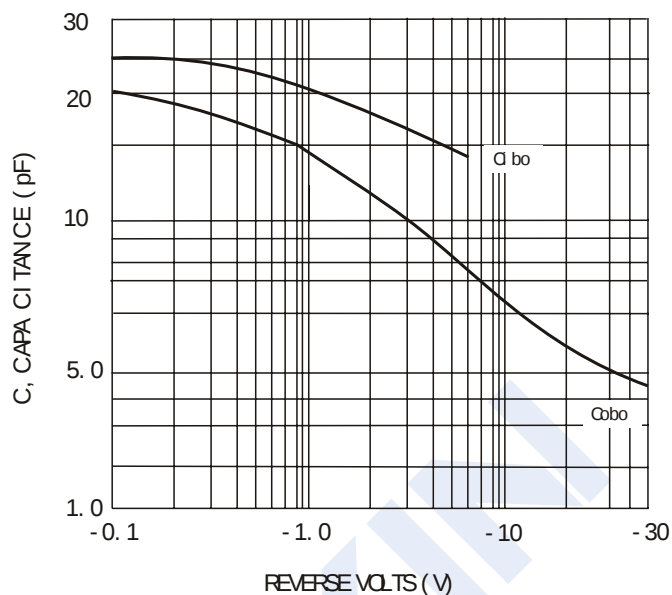

Fi g. 1 Typi cal Capaci tance

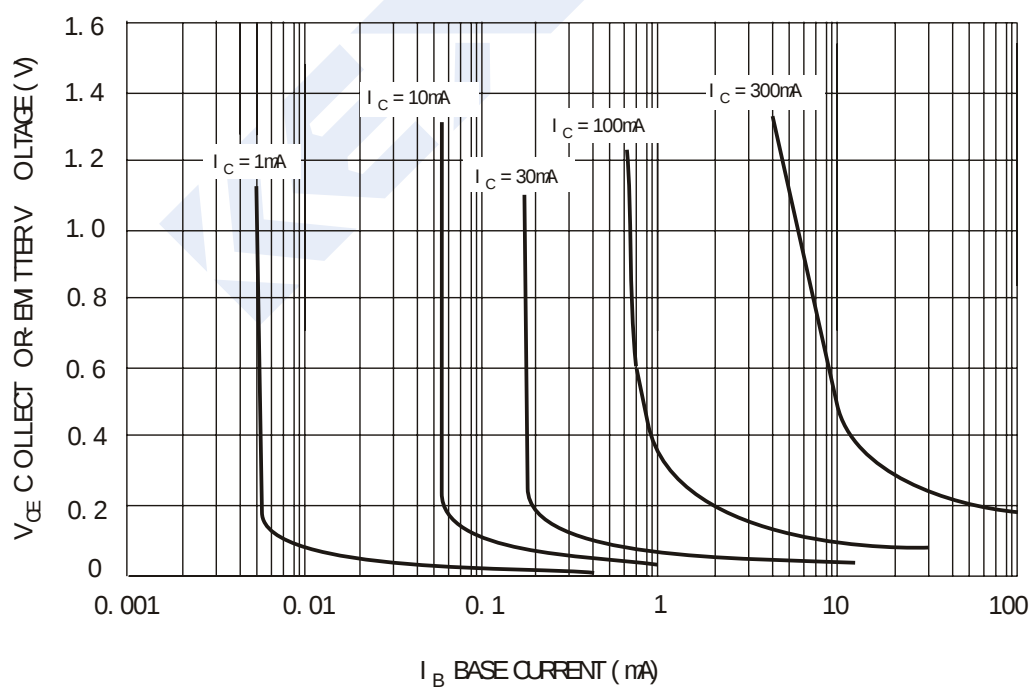

Fi g. 2 Typi cal Col l ect or Sat ur at i on Regi on

PNP Transistors
MMBT2907A (KMBT2907A)

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
VERSION A	Sep 19, 2024	-	- Change the Marking from 2F to W2F