



# MMBTRC101SS...MMBTRC106SS

## NPN Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit applications

### Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

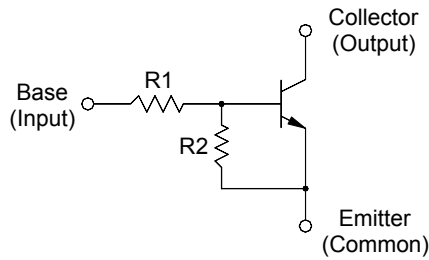


1. Base 2. Emitter 3. Collector  
TO-236 Plastic Package

### Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC101SS	4.7	4.7
MMBTRC102SS	10	10
MMBTRC103SS	22	22
MMBTRC104SS	47	47
MMBTRC105SS	2.2	47
MMBTRC106SS	4.7	47

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter		Symbol	Value	Unit
Output Voltage		$V_o$	50	V
Input Voltage	MMBTRC101SS	$V_i$	20, -10	V
	MMBTRC102SS		30, -10	
	MMBTRC103SS		40, -10	
	MMBTRC104SS		40, -10	
	MMBTRC105SS		12, -5	
	MMBTRC106SS		20, -5	
Output Current		$I_o$	100	mA
Total Power Dissipation		$P_{tot}$	200	mW
Junction Temperature		$T_j$	150	$^\circ\text{C}$
Storage Temperature Range		$T_{stg}$	- 55 to + 150	$^\circ\text{C}$



**SEMTECH ELECTRONICS LTD.**




ISO/TS 16949 : 2009 Certificate No. 160713000  
 ISO14001 : 2004 Certificate No. 7116  
 ISO 9001 : 2008 Certificate No. 60712410  
 BS-OHSAS 18001 : 2007 Certificate No. 7116  
 IECQ QC 080000 Certificate No. PRC-18P4-148-1

# MMBTRC101SS...MMBTRC106SS

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_O = 5\text{ V}$ , $I_O = 10\text{ mA}$	G <sub>I</sub>	30	-	-	-
MMBTRC101SS		50	-	-	-
MMBTRC102SS		70	-	-	-
MMBTRC103SS		80	-	-	-
MMBTRC104SS		80	-	-	-
MMBTRC105SS MMBTRC106SS		80	-	-	-
Output Cutoff Current at $V_O = 50\text{ V}$	I <sub>O(OFF)</sub>	-	-	500	nA
Input Current at $V_I = 5\text{ V}$	I <sub>I</sub>	-	-	1.8	mA
MMBTRC101SS		-	-	0.88	
MMBTRC102SS		-	-	0.36	
MMBTRC103SS		-	-	0.18	
MMBTRC104SS		-	-	3.6	
MMBTRC105SS MMBTRC106SS		-	-	1.8	
Output Voltage at $I_O = 10\text{ mA}$ , $I_I = 0.5\text{ mA}$	V <sub>O(ON)</sub>	-	-	0.3	V
Input Voltage (ON) at $V_O = 0.2\text{ V}$ , $I_O = 5\text{ mA}$	V <sub>I(ON)</sub>	-	-	2	V
MMBTRC101SS		-	-	2.4	
MMBTRC102SS		-	-	3	
MMBTRC103SS		-	-	5	
MMBTRC104SS		-	-	1.1	
MMBTRC105SS MMBTRC106SS		-	-	1.3	
Input Voltage (OFF) at $V_O = 5\text{ V}$ , $I_O = 0.1\text{ mA}$	V <sub>I(OFF)</sub>	1	-	-	V
MMBTRC101SS~104SS MMBTRC105SS~106SS		0.5	-	-	
Transition Frequency at $V_O = 10\text{ V}$ , $I_O = 5\text{ mA}$	f <sub>T</sub> <sup>1)</sup>	-	200	-	MHz

<sup>1)</sup> Characteristic of transistor only.










**SEMTECH ELECTRONICS LTD.**



Dated : 16/03/2015 Rev:02








# MMBTRC101SS...MMBTRC106SS

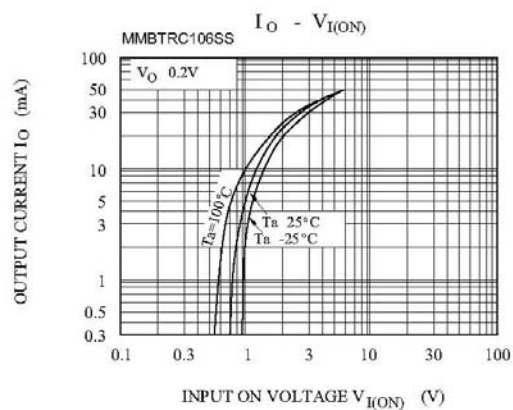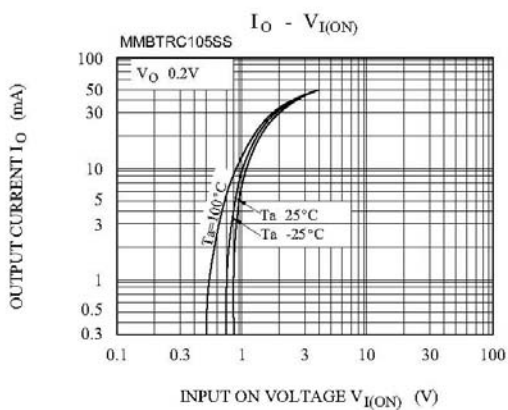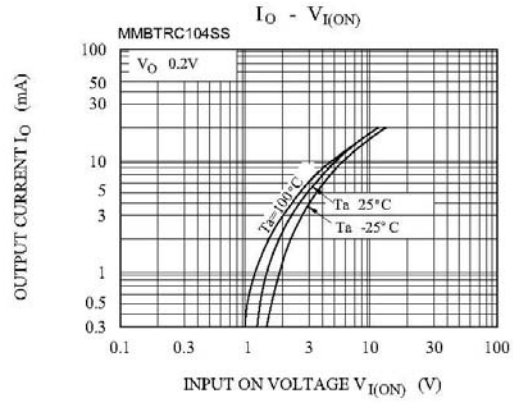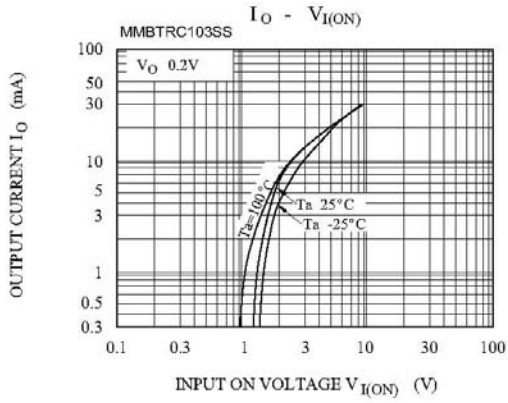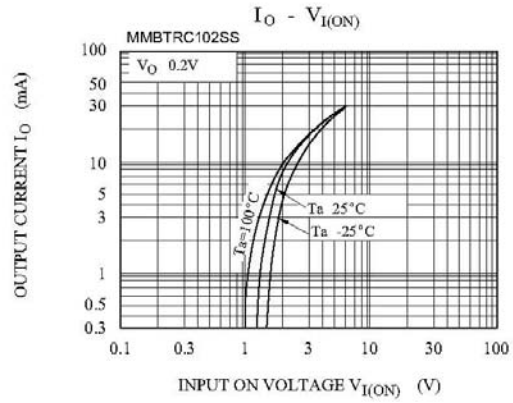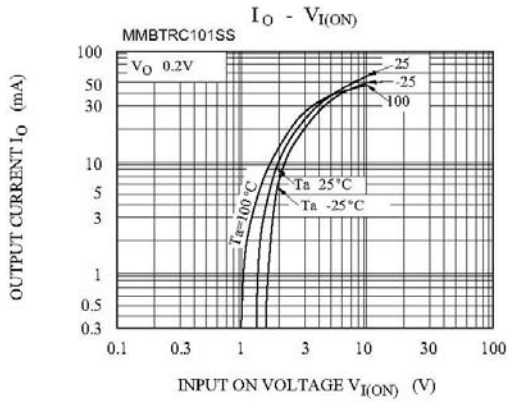

**SEMTECH ELECTRONICS LTD.**











# MMBTRC101SS...MMBTRC106SS

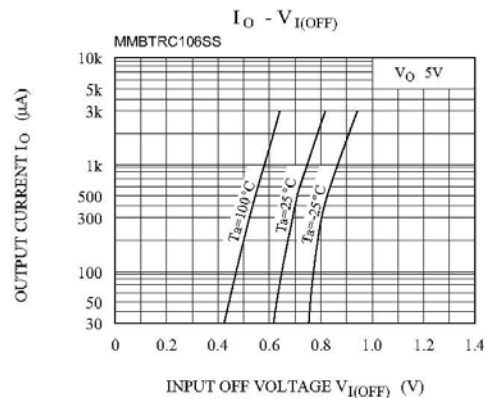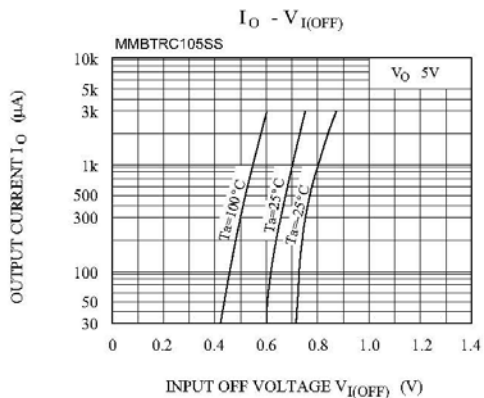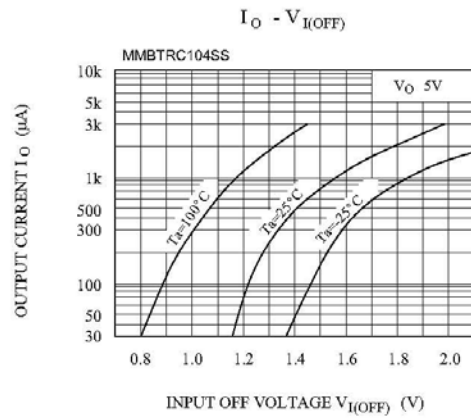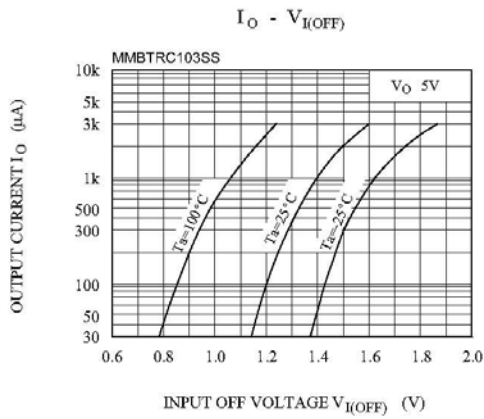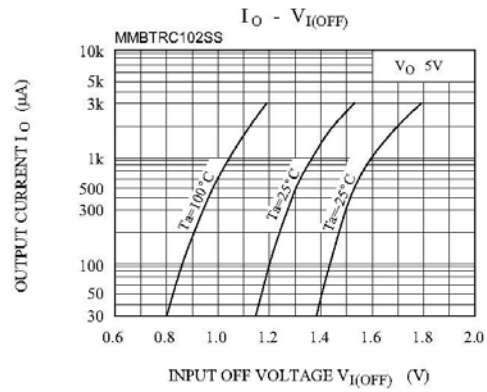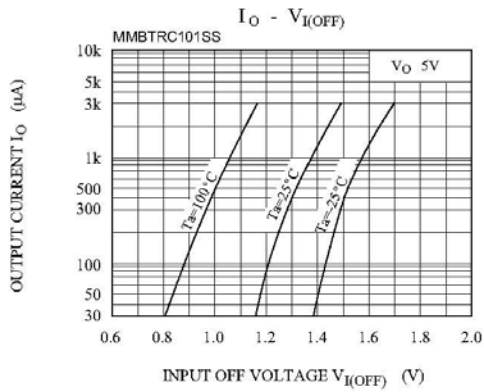

**SEMTECH ELECTRONICS LTD.**



# MMBTRC101SS...MMBTRC106SS

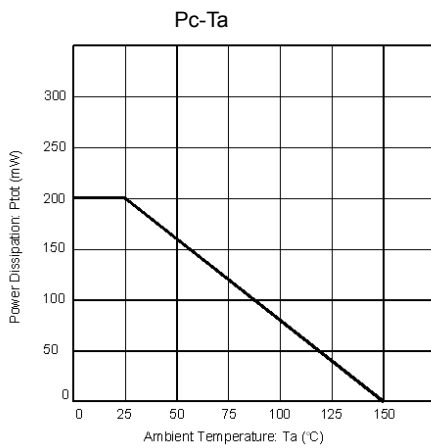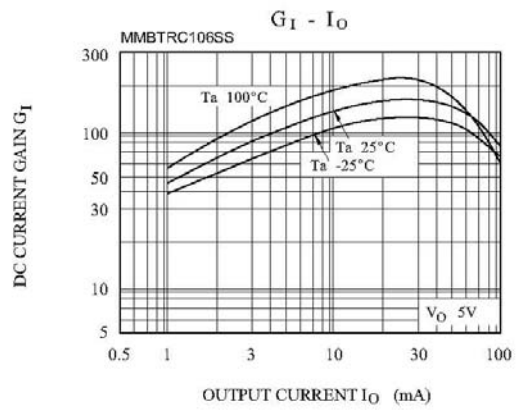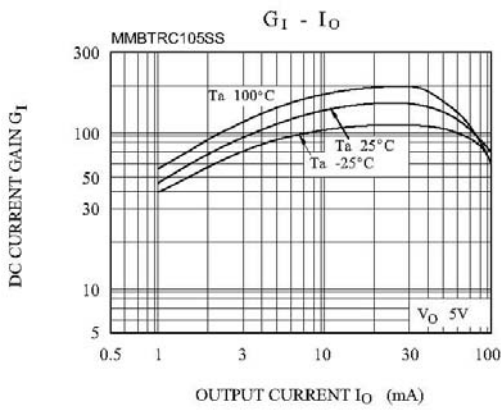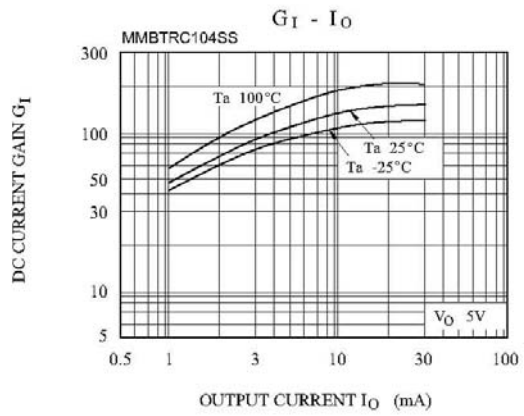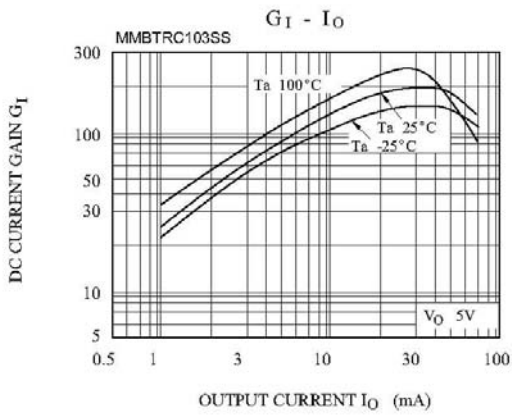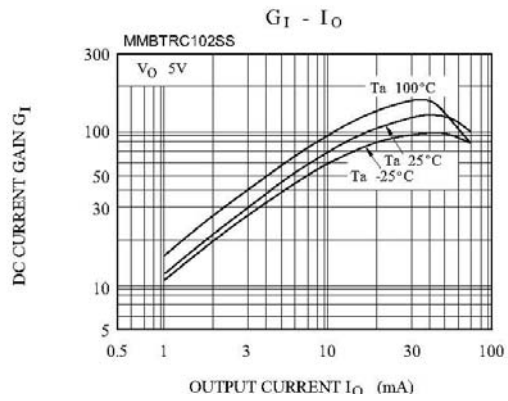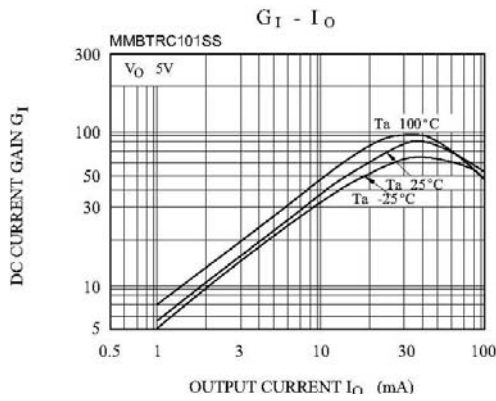

**SEMTECH ELECTRONICS LTD.**



ISO 9001:2008  
Certificate No. 160713000

ISO 14001:2004  
Certificate No. 7116

ISO 9001:2008  
Certificate No. 6071940

BS-OHSAS 18001:2007  
Certificate No. 7116

IECQ QC 080000  
Certificate No. PRC-18294-148-1