


PRODUCT FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

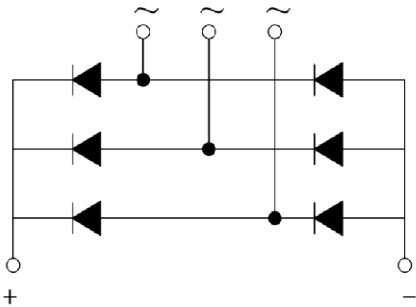

APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter



Module Type

| Module Type | V_{RRM} (Repetitive Peak Reverse Voltage) | V_{RSM} (Non-Repetitive Peak Reverse Voltage) | Unit |
|-------------|--|--|------|
| MMD70EB120X | 1200 | 1300 | V |
| MMD70EB140X | 1400 | 1500 | |
| MMD70EB160X | 1600 | 1700 | |
| MMD70EB180X | 1800 | 1900 | |

ABSOLUTE MAXIMUM RATINGS

$T_C = 25^\circ\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | | Values | Unit | |
|---------------|--------------------------------------|---|-------------|-------------------|-----|
| I_D | Output Current(D.C.) | Three phase, half wave, $T_c = 95^\circ\text{C}$ | 70 | A | |
| I_{FSM} | Non-Repetitive Surge Forward Current | 1/2 cycle, 50HZ, peak value, $T_c = 45^\circ\text{C}$ | 700 | | |
| | | 1/2 cycle, 60HZ, peak value, $T_c = 45^\circ\text{C}$ | 750 | | |
| I^2t | For Fusing | 1/2 cycle, 50HZ, peak value, $T_c = 45^\circ\text{C}$ | 2.45 | KA ² S | |
| | | 1/2 cycle, 60HZ, peak value, $T_c = 45^\circ\text{C}$ | 2.33 | | |
| P_D | Power Dissipation | | 690 | W | |
| T_J | Junction Temperature | | -40 to +150 | $^\circ\text{C}$ | |
| T_{STG} | Storage Temperature Range | | -40 to +125 | $^\circ\text{C}$ | |
| V_{ISO} | Isolation Breakdown Voltage | AC, 50Hz(R.M.S), $t=1$ minute | 3000 | V | |
| Torque | Module to Sink | Recommended (M5) | 2.5~5 | Nm | |
| Torque | Module Electrodes | Recommended (M5) | 2.5~5 | Nm | |
| R_{thJC} | Junction to Case Thermal Resistance | | per diode | 1.1 | K/W |
| | | | per module | 0.18 | |
| Weight | | | 130 | g | |

ELECTRICAL CHARACTERISTICS

$T_C = 25^\circ\text{C}$ unless otherwise specified

| Symbol | Parameter/Test Conditions | Min. | Typ. | Max. | Unit |
|----------|--|------|------|--|------------|
| I_{RM} | Maximum Reverse Leakage Current | | | 0.5 | mA |
| | | | | $V_R = V_{RRM}, T_J = 125^\circ\text{C}$ | |
| V_F | Forward Voltage Drop | | | 1.35 | V |
| V_{TO} | For power loss calculations only , $T_J = 125^\circ\text{C}$ | | | 0.95 | V |
| r_T | | | | 4.7 | m Ω |

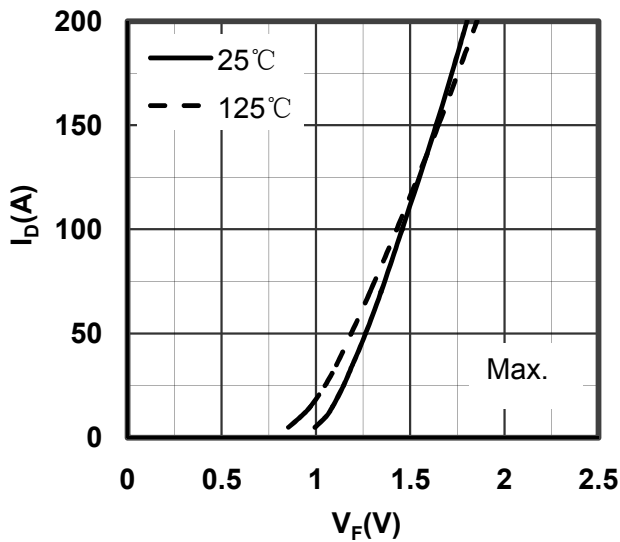


Figure 1. Forward Voltage Drop vs Output Current

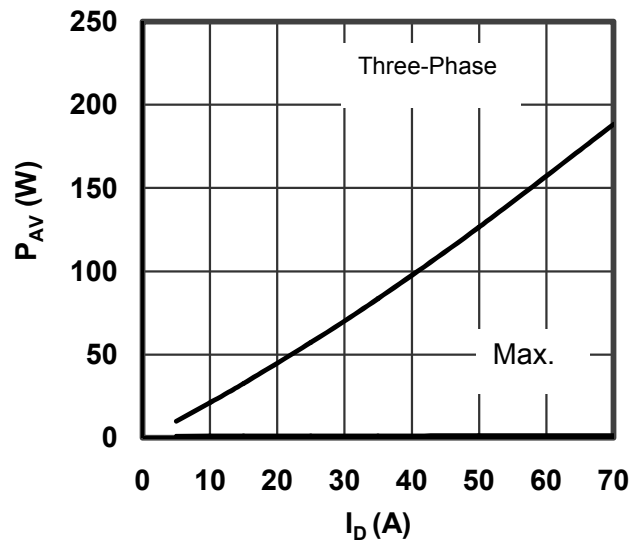


Figure 2. Power dissipation vs Output Current

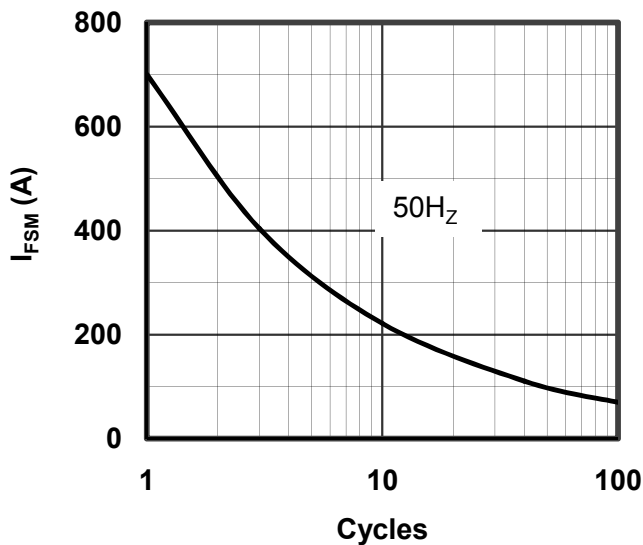


Figure 3. Max Non-Repetitive Forward Surge Current

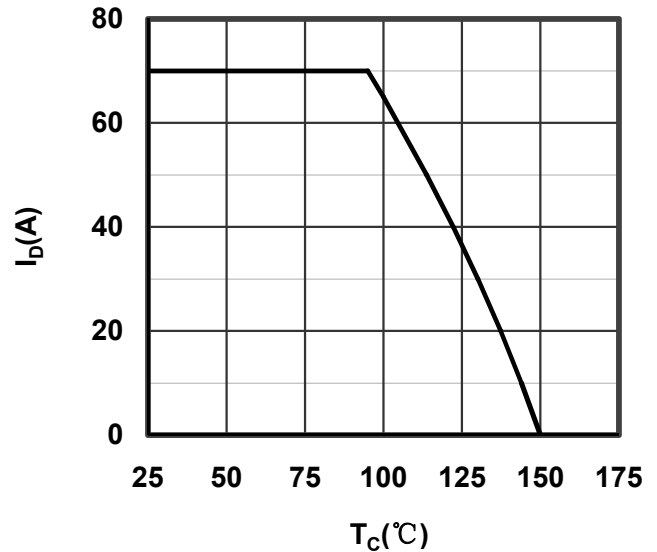


Figure 4. Output current vs Case temperature


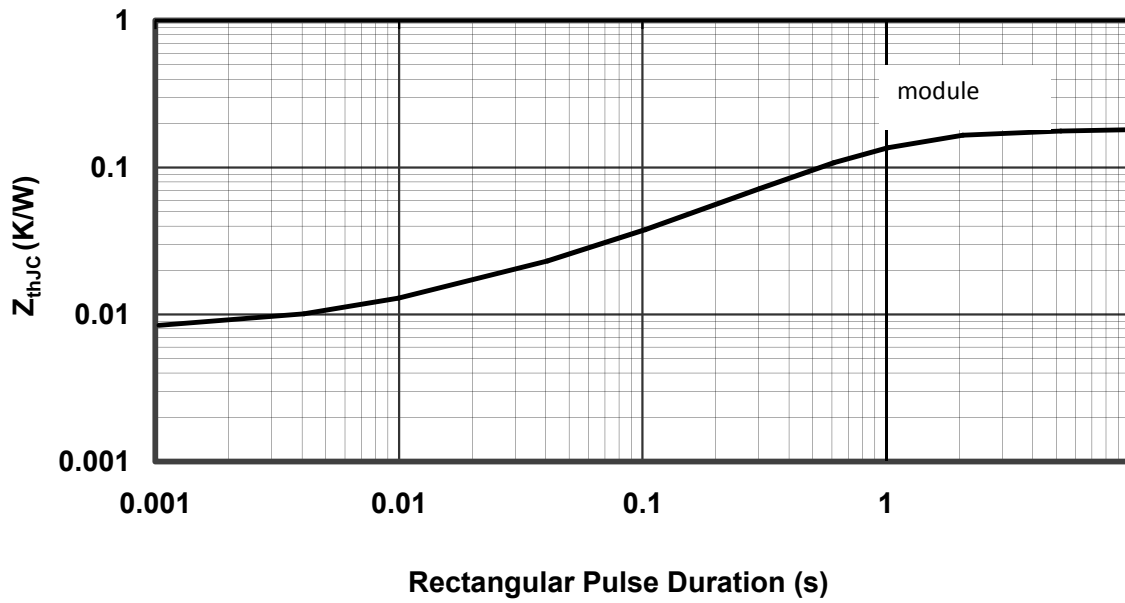


Figure 5. Transient Thermal Impedance

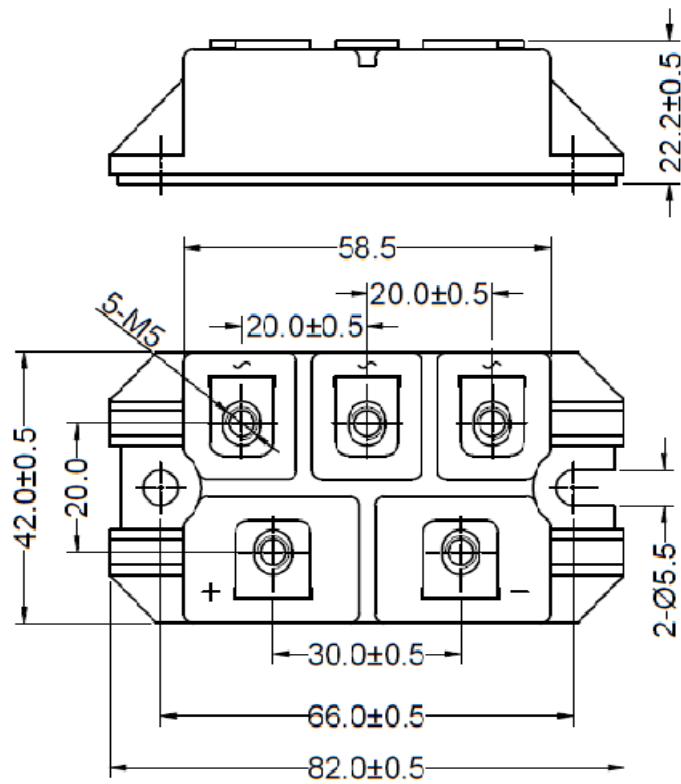

Dimensions in (mm)
Figure 6. Package Outline