




PACKAGE DIMENSIONS

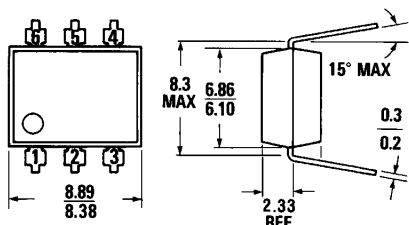

DIMENSIONS IN mm
PACKAGE CODE K

ST1603A



C2079A

Equivalent Circuit

DESCRIPTION

The MOC series consists of a Gallium Arsenide IRED coupled with an NPN phototransistor.

FEATURES

- High isolation voltage
5300 VAC RMS—1 minute
7500 VAC PEAK—1 minute
- High BV_{CEO} minimum 70 volts
- Current transfer ratio in selected groups:
MOC8111: 20% min.
MOC8112: 50% min.
MOC8113: 100% min.
- Maximum switching time in saturation specified
- Underwriters Laboratory (UL) recognized File #E90700

APPLICATIONS

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs
- Appliance sensor systems
- Industrial controls

ABSOLUTE MAXIMUM RATINGS

TOTAL PACKAGE

Storage temperature	—55°C to 150°C
Operating temperature	—55°C to 100°C
Lead temperature (soldering, 10 sec)	260°C
Total package power dissipation @ 25°C (LED plus detector)	260 mW
Derate linearly from 25°C	3.5 mW/°C

INPUT DIODE

Forward DC current	90 mA
Reverse voltage	6 V
Peak forward current (1 μ s pulse, 300 pps)	3.0 A
Power dissipation 25°C ambient	135 mW
Derate linearly from 25°C	1.8 mW/°C

OUTPUT TRANSISTOR

Power dissipation @ 25°C	200 mW
Derate linearly from 25°C	2.67 mW/°C



PHOTOTRANSISTOR OPTOCOUPERS

ELECTRO-OPTICAL CHARACTERISTICS (25°C Temperature Unless Otherwise Specified)

INDIVIDUAL COMPONENT CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
INPUT DIODE						
Forward voltage	V_F		1.3	1.50	V	$I_F = 60 \text{ mA}$
Forward voltage temp. coefficient	$\frac{\Delta V_F}{\Delta T_A}$		-1.8		mV/°C	
Reverse voltage	V_R	6.0	15		V	$I_R = 10 \text{ } \mu\text{A}$
Junction capacitance	C_J		50		pF	$V_F = 0 \text{ V}, f = 1 \text{ MHz}$
			65		pF	$V_F = 1 \text{ V}, f = 1 \text{ MHz}$
Reverse leakage current	I_R		.35	10	μA	$V_R = 3.0 \text{ V}$
OUTPUT TRANSISTOR						
Breakdown voltage Collector to emitter	BV_{CEO}	70			V	$I_C = 1.0 \text{ mA}, I_F = 0$
Emitter to collector Leakage current	BV_{ECO}	7			V	$I_E = 100 \text{ } \mu\text{A}, I_F = 0$
Collector to emitter	I_{CEO}		5	50	nA	$V_{CE} = 10 \text{ V}, I_F = 0$
Capacitance Collector to emitter			8		pF	$V_{CE} = 0, f = 1 \text{ MHz}$

TRANSFER CHARACTERISTICS

DC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Current Transfer Ratio, collector to emitter MOC8111	CTR	20			%	$I_F = 10 \text{ mA}; V_{CE} = 5 \text{ V}$
		50				
		100				
Saturation voltage	$V_{CE(SAT)}$		0.27	.40	V	$I_F = 10 \text{ mA}; I_C = 2.5 \text{ mA}$

TRANSFER CHARACTERISTICS

AC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SWITCHING TIMES						
Non-saturated Turn-on time	t_{on}		6.0	10	μs	$R_L = 100 \text{ } \Omega; I_C = 2 \text{ mA}; V_{CC} = 10 \text{ V}$
Turn-off time	t_{off}		5.5	10	μs	See Fig. 10.

ELECTRO-OPTICAL CHARACTERISTICS
(25°C Temperature Unless Otherwise Specified) (Cont'd)

TRANSFER CHARACTERISTICS (Cont'd)

AC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SATURATED SWITCHING TIMES						
Turn-on time	t_{on}					
MOC8111			3.0	5.5	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			4.2	8.0	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Rise-time	t_r					
MOC8111			2.0	4.0	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			3.0	6.0	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Turn-off time	t_{off}					
MOC8111			18	34	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			23	39	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Fall-time	t_f					
MOC8111			11	20	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			14	24	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$

ISOLATION CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Isolation voltage	V_{iso}	5300			$V_{AC} \text{ RMS}$	$I_{FO} \leq 1 \mu A$, 1 minute
	V_{iso}	7500			$V_{AC} \text{ PEAK}$	$I_{FO} \leq 1 \mu A$, 1 minute
Isolation resistance	R_{iso}	10^{11}			ohms	$V_{FO} = 500 \text{ VDC}$
Isolation capacitance	C_{iso}		0.5		pF	$f = 1 \text{ MHz}$

ELECTRICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature Unless Otherwise Specified)

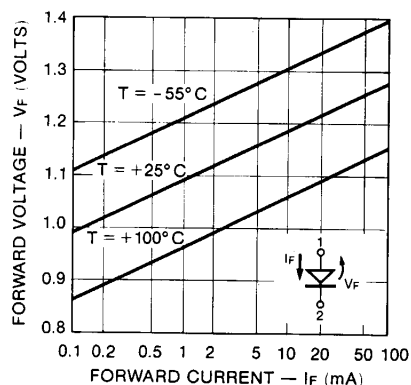


Fig. 1. Forward Voltage vs. Current

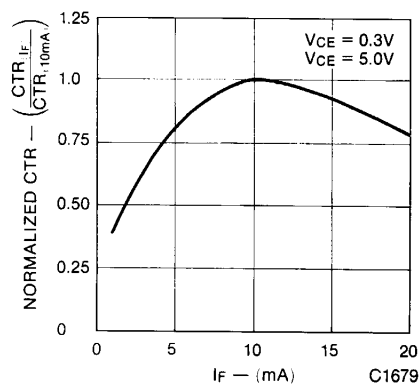


Fig. 2. Normalized CTR vs. Forward Current

ELECTRO-OPTICAL CHARACTERISTICS
(25°C Temperature Unless Otherwise Specified) (Cont'd)

TRANSFER CHARACTERISTICS (Cont'd)

AC CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
SATURATED SWITCHING TIMES						
Turn-on time	t_{on}					
MOC8111			3.0	5.5	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			4.2	8.0	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Rise-time	t_r					
MOC8111			2.0	4.0	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			3.0	6.0	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Turn-off time	t_{off}					
MOC8111			18	34	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			23	39	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
Fall-time	t_f					
MOC8111			11	20	μs	$I_F = 20 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$
MOC8112, MOC8113			14	24	μs	$I_F = 10 \text{ mA}$, $V_{CE} = 0.4 \text{ V}$

ISOLATION CHARACTERISTICS

CHARACTERISTICS	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Isolation voltage	V_{iso}	5300			$V_{AC} \text{ RMS}$	$I_{FO} \leq 1 \mu A$, 1 minute
	V_{iso}	7500			$V_{AC} \text{ PEAK}$	$I_{FO} \leq 1 \mu A$, 1 minute
Isolation resistance	R_{iso}	10^{11}			ohms	$V_{FO} = 500 \text{ VDC}$
Isolation capacitance	C_{iso}		0.5		pF	$f = 1 \text{ MHz}$

ELECTRICAL CHARACTERISTIC CURVES
(25°C Free Air Temperature Unless Otherwise Specified)

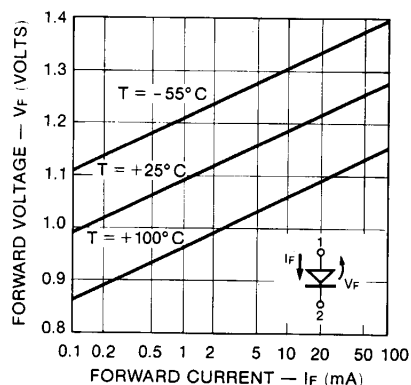


Fig. 1. Forward Voltage vs. Current

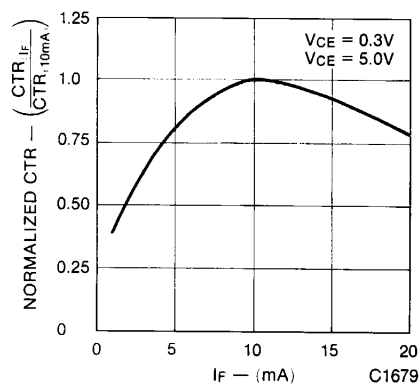


Fig. 2. Normalized CTR vs. Forward Current

ELECTRICAL CHARACTERISTIC CURVES

(25°C Free Air Temperature Unless Otherwise Specified) (Cont'd)

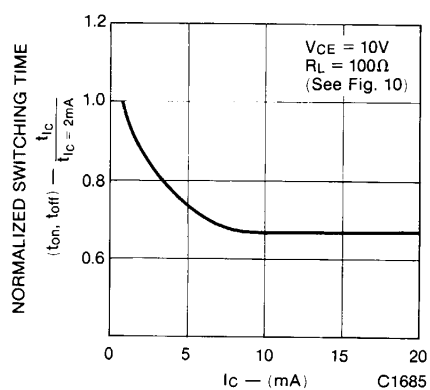


Fig. 5. Switching Time vs. I_C

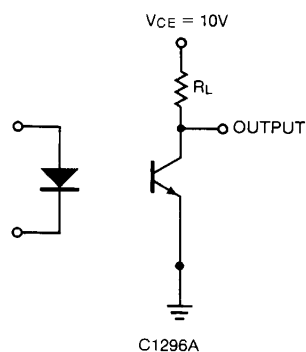


Fig. 6. Switching Time Test Circuit

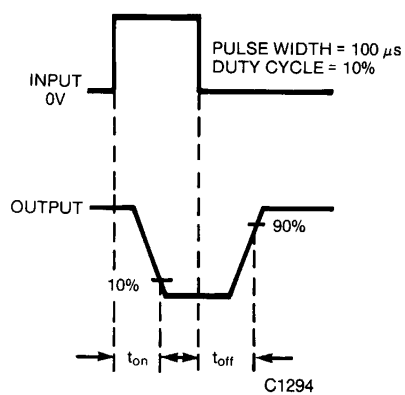


Fig. 7. Switching Time Waveforms