

# MICRO ELECTRONICS

MOG1588A  
MOG1588C

www.DataSheet4U.com  
THREE COLOR  
EMITTED LED DOT  
MATRIX DISPLAY

## FEATURES :

- Three emitted color : High efficiency red, green, orange  
(The mixture of high efficiency red and green)
- Anode column, Cathode row (MOG1588A);
- Cathode column, Anode row (MOG1588C)
- High contrast
- Wide viewing angle
- 8 x 8 matrix array with row-column select
- Regged encapsulation (Filled reflector construction)
- End & side stackable

## ABSOLUTE MAXIMUM RATINGS

Power Dissipation / Dot	75mW
Peak Forward Current / Dot*	100mA
Continuous Forward Current / Dot	25mA
Reverse Voltage / Dot	5V
Operating Temperature Range	-25 to +80°C
Storage Temperature Range	-20 to +75°C

\* Note : Pulse Width = 1mS, Duty Ratio = 1/10.

www.DataSheet4U.com

## ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	Hi-Eff. Red	Green	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	V	IF=20mA
Luminous Intensity	MIN IV	2000	2500	μcd	IF=10mA
	TYP	3000	5000	μcd	
Dot to Dot Luminous Intensity Ratio	MAX	2:1	2:1		IF=10mA
Reverse Current	MAX IR	100	100	μA	VR=5V
Peak Wavelength	TYP λp	630	565	nm	IF=20mA
Spectral Line Half Width	TYP Δλ	40	30	nm	IF=20mA




MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.  
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Mar-97

MECHANICAL OUTLINE:

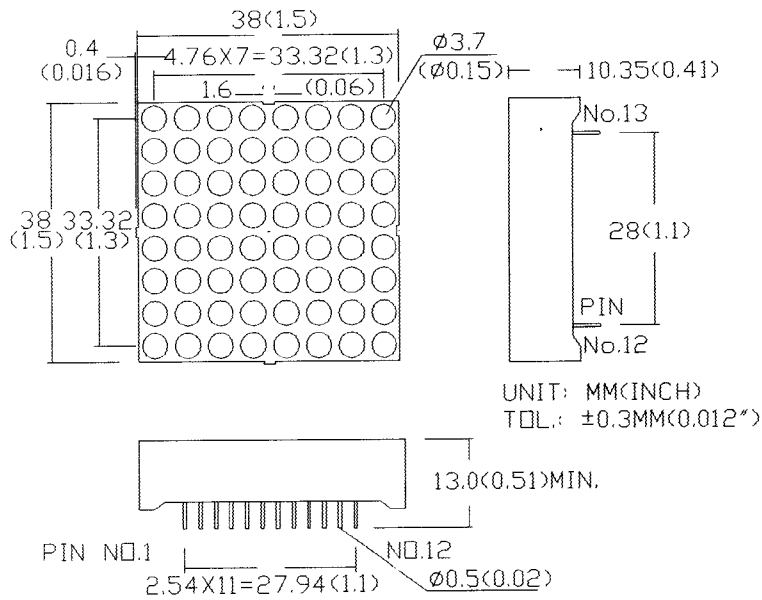

CIRCUIT DIAGRAM:

