

MICRO

ELECTRONICS

MOG2158TC

THREE COLOR
EMITTED LED DOT
MATRIX DISPLAY

www.DataSheet4U.com

FEATURES :

- Three emitted color : High efficiency red, green, orange
(The mixture of high efficiency red and green)
- Anode column, Cathode row (MOG2158TA);
- Cathode column, Anode row (MOG2158TC)
- High contrast
- Dot clear transparent lens
- 5 x 8 matrix array with row-column select
- Regged encapsulation (Filled reflector construction)
- End & side stackable

ABSOLUTE MAXIMUM RATINGS

Power Dissipation / Dot	75mW
Peak Forward Current / Dot*	100mA
Continuous Forward Current / Dot	25mA
Reverse Voltage / Dot	5V
Operating Temperature Range	-20 to +75°C
Storage Temperature Range	-25 to +80°C
Lead Temperature (Soldering 5 sec., 1/16" from body)	260°C


* Note : Pulse Width = 1mS, Duty Ratio = 1/10.

www.DataSheet4U.com

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	Hi-Eff. Red	Green	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	V	IF=20mA
Luminous Intensity	MIN IV	3.5	5.0	mcd	IF=10mA
	TYP	6.0	9.0	mcd	IF=10mA
Dot to Dot Luminous Intensity Ratio	MAX	2:1	2:1		IF=10mA
Reverse Current Any Bar	MAX IR	100	100	μA	VR=5V
Peak Wavelength	TYP λp	630	570	nm	IF=20mA
Spectral Line Half Width	TYP Δλ	40	30	nm	IF=20mA

MECHANICAL OUTLINE

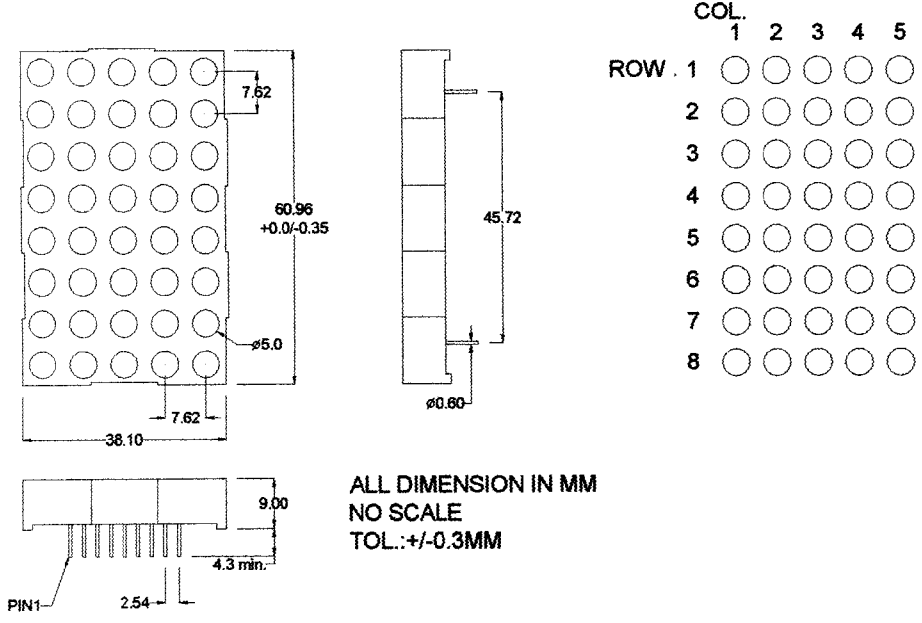

CIRCUIT DIAGRAM

