

Silicon Bridge Rectifiers

MP1000 Thru 1010


Reverse Voltage: 50 - 1000 Volts
 Forward Current: 10 Amp

Features

- Diffused Junction
- High Current Capability
- High Case Dielectric Strength
- High Surge Current Capability
- Ideal for Printed Circuit Board Application
- Plastic Material has Underwriters Laboratory Flammability Classification 94V-O

Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL STD-202, Method 208
- Weight: 5.4 grams (approx.)
- Mounting Position: Through Hole for #6 Screw
- Mounting Torque: 5.0 Inch-pounds Maximum

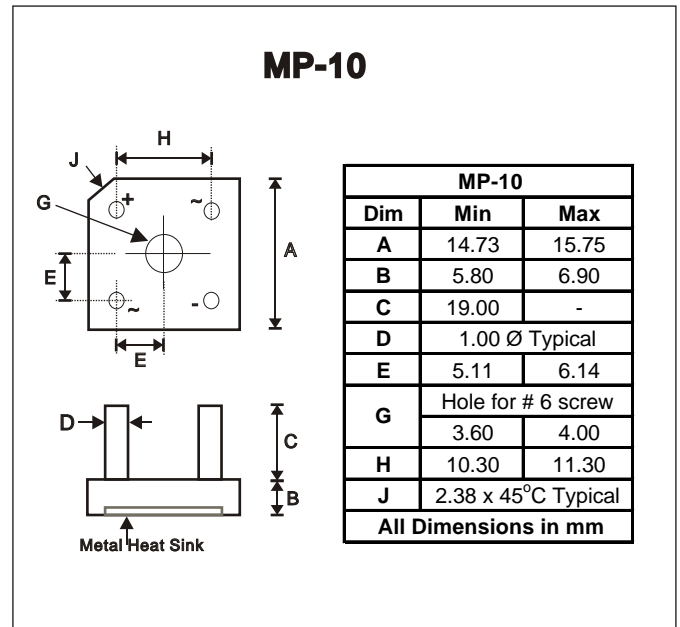

Maximum Ratings and Electrical Characteristics

Single Phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

CHARACTERISTICS	Symbol	MP 1000	MP 1001	MP 1002	MP 1004	MP 1006	MP 1008	MP 1010	UNIT
Peak Repetitive Reverse Voltage	V_{RRM}								
Working Peak Reverse Voltage	V_{RWM}	50	100	200	400	600	800	1000	V
DC Blocking Voltage	V_R								
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Average Rectified Output Current (Note1) @ $T_A = 50^\circ\text{C}$	I_O	10							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200							A
Forward Voltage (per element) @ $I_F = 5.0\text{A}$	V_{FM}	1.1							V
Peak Reverse Current @ $T_C = 25^\circ\text{C}$	I_R	10							μA
At Rated DC Blocking Voltage @ $T_C = 100^\circ\text{C}$		1.0							mA
I^2t Rating for Fusing ($t < 8.3\text{ms}$) (Note2)	I^2t	64							A^2s
Typical Junction Capacitance (Note3)	C_j	110							pF
Typical Thermal Resistance (Note4)	$R_{\theta JC}$	7.5							K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150							$^\circ\text{C}$

Note: 1. Non-repetitive for $t > 1\text{ms}$ and $< 8.3\text{ms}$.

2. Thermal resistance junction to ambient mounted on PC board with 13.0 x 13.0 x 0.03mm thick land areas.
3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.
4. Thermal resistance junction to case per element.

Silicon Bridge Rectifiers

Rating and Characteristic Curves (MP1000 thru 1010)

