

Series MP

3 - 4 Amps • 120/240 Vac (AC Output) • 60 Vdc (DC Output) • SIP

www.datasheet4u.com

CRYDOM

Control over power

- **High Packaging Density**
- **Compatible with 5, 15 & 24 Volt Logic Systems**
- **Opto-Isolated 4000 Vrms**
- **Zero Voltage Switching (AC)**

Available in 3Arms and 4Arms ratings, all are SPST-NO PC-mount relays that provide greater packaging density and compatibility with pin out of Series 6 and OAC output modules. Internal snubber included for high dv/dt applications (AC). Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

MODEL NUMBER	MP120D3	MP240D3	MP240D4
AC OUTPUT SPECIFICATIONS ①			
Operating Voltage Range (47-63 Hz) [Vrms]	12-140	24-280	24-280
Load Current Range [Arms]	.02-3	.02-3	.02-4
Transient Overvoltage [Vpk]	400	600	600
Max. Surge Current, (16.6ms) [Apk]	90	90	130
Max. On-State Voltage Drop @ Rated Current [Vpk]	1.6	1.6	1.6
Maximum I ² t for Fusing, (8.3 msec.) [A ² sec]	36	36	72
Max. Off-State Leakage Current @ Rated Voltage [mArms]	5.0	5.0	5.0
Min. Off-State dv/dt @ Max. Rated Voltage [V/μsec] ②	200	200	200
Max. Turn-On Time	1/2 Cycle	1/2 Cycle	1/2 Cycle
Max. Turn-Off Time	1/2 Cycle	1/2 Cycle	1/2 Cycle
Power Factor (Min.) with Max. Load	0.5	0.5	0.5

DC OUTPUT SPECIFICATIONS	MPDCD3
DC OUTPUT SPECIFICATIONS ①	
Operating Voltage Range [Vdc]	3-60
Load Current Range [Adc]	0.02-3.0
Max. Over Current (non-repetative) 1sec [A]	5.0
Max. On-State Voltage Drop @ Rated Current [Vdc]	1.5
Max. Turn-On time (T _{delay} + T _{rise}) [μs]	100
Max. Turn-Off time (T _{delay} + T _{fall}) [μs]	100
Max. Off-State Leakage Current @ Rated Voltage [mA]	1.0

INPUT SPECIFICATIONS	All Models
INPUT SPECIFICATIONS ①	
Control Voltage Range [Vdc]	3-32
Must Turn-On Voltage [Vdc]	3.0
Must Turn-Off Voltage [Vdc]	1.0
Typical Input Current @ 5Vdc [mA]	2.6
Nominal Input Impedance [Ohms]	1500

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Off-State dv/dt test method per EIA/NARM standard RS-343, paragraph 13.11.1
- ③ Inductive loads should be diode suppressed.

©2002 CRYDOM CORP, Specifications subject to change without notice.

FastFax Document No. 111
SERIES MP
Rev. 041702
PAGE 1 OF 2

For recommended applications and more information contact:
USA: Sales Support (877) 502-5500 **Tech Support** (877) 702-7700 **FAX** (619) 710-8540
Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154
Email: sales@crydom.com **WEB SITE:** http://www.crydom.com
UK: +44 (0)1202 365070 • **FAX** +44 (0)1202 365090 Crydom International Ltd., 7 Cobham
Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, **Email:** intsales@crydom.com
GERMANY: +49 (0)180 3000 506



www.DataSheet4U.com

Series MP

3 - 4 Amps • 120/240 Vac (AC Output) • 60 Vdc (DC Output) • SIP

www.datasheet4u.com





GENERAL SPECIFICATIONS

Dielectric Strength 50/60Hz Input/Output/Base	4000 Vrms
Insulation Resistance (Min.) @ 500 Vdc	10 ⁹ Ohm
Max. Capacitance Input/Output	8 pF
Ambient Operating Temperature Range	-40 to 80°C
Ambient Storage Temperature Range	-40 to 125°C

MECHANICAL SPECIFICATIONS

Weight: (typical)	0.7 oz. (20g)
Encapsulation:	Thermally Conductive Epoxy

CURRENT DERATING CURVES

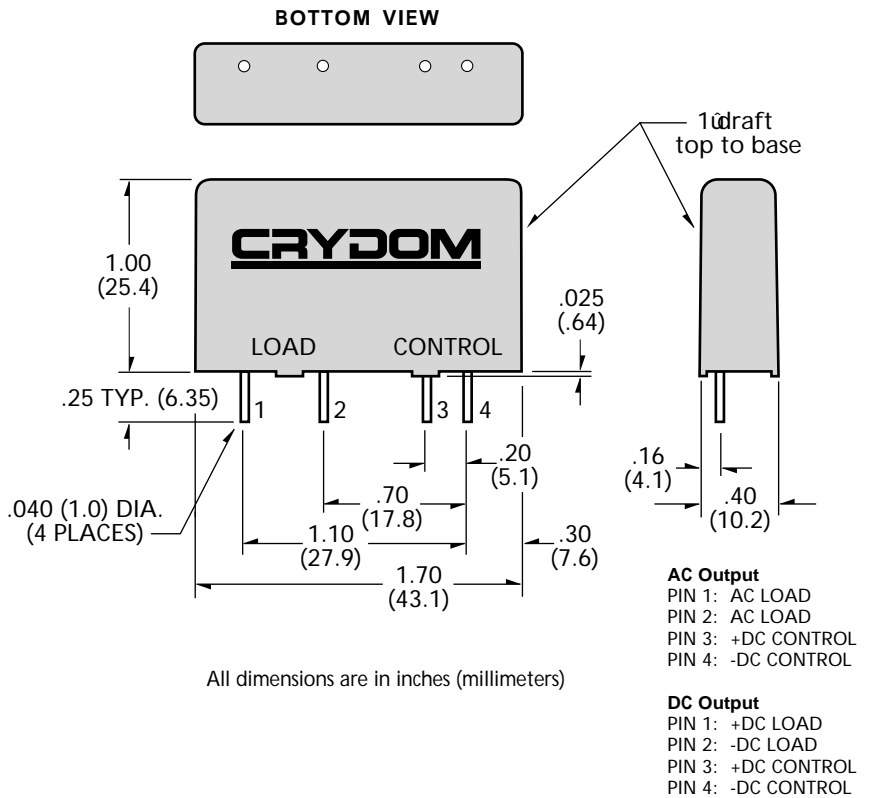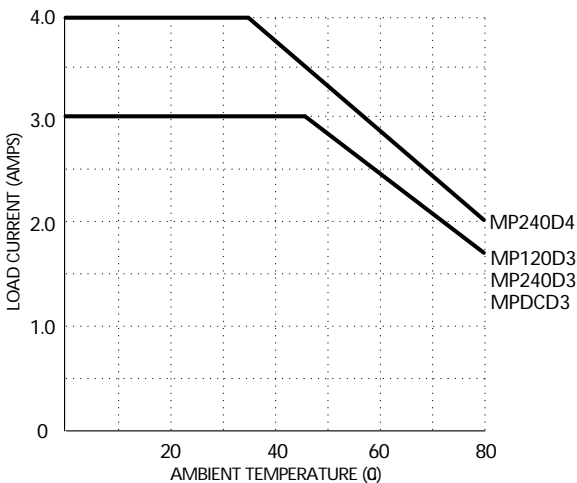

All dimensions are in inches (millimeters)

©2002 CRYDOM CORP, Specifications subject to change without notice.

APPROVALS

UL E116950
 VDE 5900 UG (AC Output Only)
 CSA LR81689 (AC Output Only)

