

M-Pulse Microwave

Silicon Bipolar MMIC Cascadable Amplifier

MP4TD0635, MP4TD0636

Features


- Cascadable 50 Ω Gain Block
- 3dB Bandwidth: DC to 0.8 GHz
- 18.5 dB Typical Gain @ 0.5 GHz
- Unconditionally Stable ($k > 1$)
- 3.5 Voltage Operation
- Cost Effective Ceramic Microstrip Package
- Tape and Reel Packaging Available

Description

M-Pulse's MP4TD0635 and MP4TD0636 are high performance silicon bipolar MMICs housed in a cost effective ceramic microstrip packages. The MP4TD0635 and MP4TD0636 are designed for use where a general purpose 50 Ω gain block is required. Typical applications include narrow and wide band IF and RF amplifiers in industrial and military applications.

The MP4TD0635 and MP4TD0636 are fabricated using a 10 GHz f_T silicon bipolar technology that features gold metalization and IC passivation for increased performance and reliability.

Ceramic Microstrip Case Style Outlines^{1,2,3} Available in short lead version as MP4TD0636.

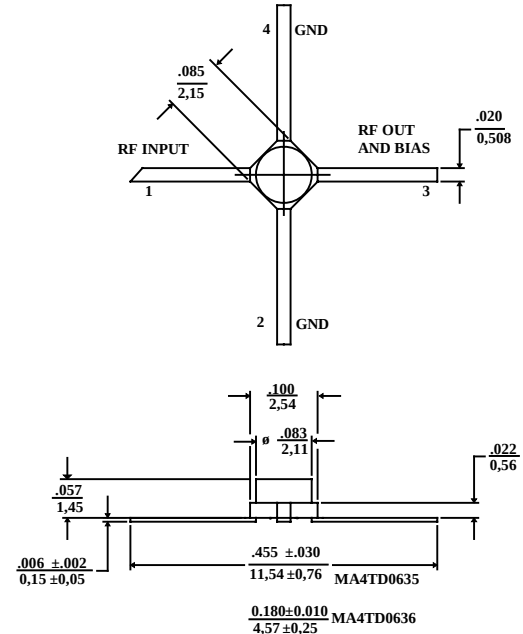


Notes: (unless otherwise specified)

1. Dimensions are in / mm
2. Tolerance: in .xxx = ± 0.005 ; mm .xx = ± 0.13
3. See last page of data sheet for short lead Micro-X

Pin Configuration

Pin Number	Pin Description
1	RF Input
2 & 4	AC/DC Ground
3	RF Output and DC Bias

TYPICAL POWER GAIN vs FREQUENCY

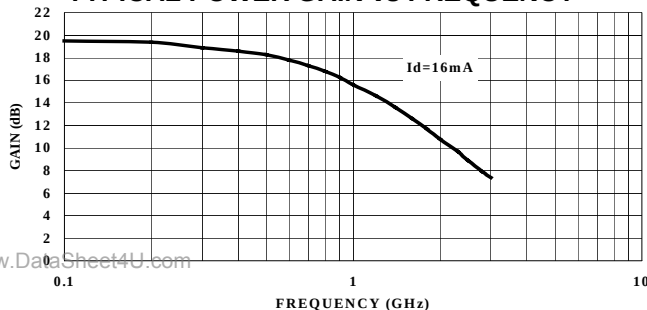

Electrical Specifications @ $T_A = +25^\circ\text{C}$, $I_d = 16 \text{ mA}$, $Z_0 = 50\Omega$






Symbol	Parameters	Test Conditions	Units	Min.	Typ.	Max.
Gp	Power Gain ($ S_{21} ^2$)	$f = 0.1 \text{ GHz}$	dB	19	20.0	22
∇G_p	Gain Flatness	$f = 0.1 \text{ to } 0.6 \text{ GHz}$	dB	-	± 0.8	± 1.0
f_{3dB}	3 dB Bandwidth	-	GHz	-	0.8	-
SWR _{in}	Input SWR	$f = 0.1 \text{ to } 1.5 \text{ GHz}$	-	-	2.0	-
SWR _{out}	Output SWR	$f = 0.1 \text{ to } 1.5 \text{ GHz}$	-	-	1.8	-
P _{1dB}	Output Power @ 1 dB Gain Compression	$f = 0.5 \text{ GHz}$	dBm	-	4.5	-
NF	50 Ω Noise Figure	$f = 0.5 \text{ GHz}$	dB	-	3.0	4.0
IP ₃	Third Order Intercept Point	$f = 0.5 \text{ GHz}$	dBm	-	14.5	-
t _D	Group Delay	$f = 0.5 \text{ GHz}$	ps	-	200	-
V _d	Device Voltage	-	V	3.1	3.5	3.9
dV/dT	Device Voltage Temperature Coefficient	-	mV/ $^\circ\text{C}$	-	-8.0	-

Specification Subject to Change Without Notice



Absolute Maximum Ratings¹

Parameter	Absolute Maximum
Device Current	50 mA
Power Dissipation ^{2,3}	200 mW
RF Input Power	+20 dBm
Junction Temperature	200°C
Storage Temperature	-65°C to +200°C
Thermal Resistance: $\theta_{jc} = 150^{\circ}\text{C/W}$	

- Exceeding these limits may cause permanent damage.
- Case Temperature (T_c) = 25 °C.
- Derate at 6.7 mW/°C for $T_c > 170^{\circ}\text{C}$.

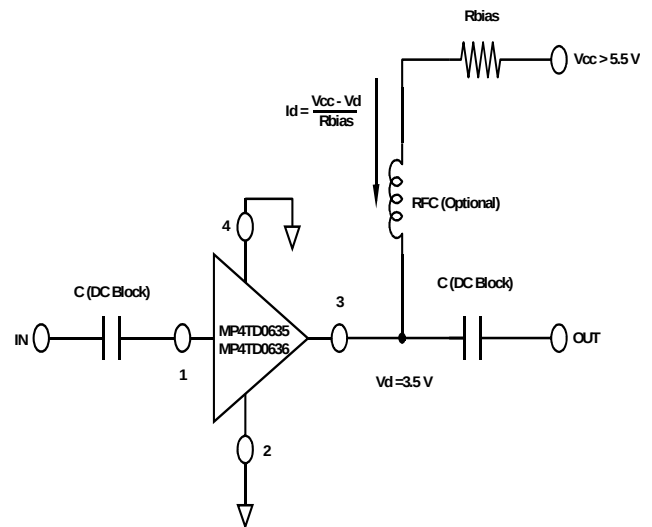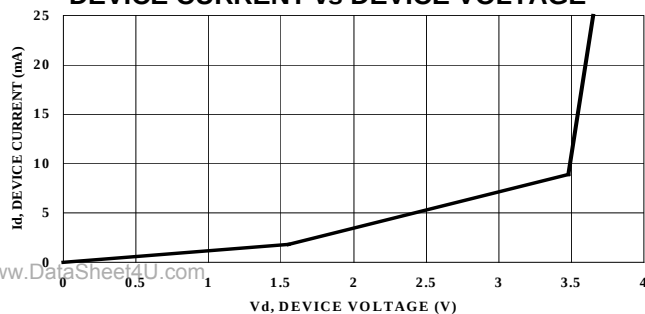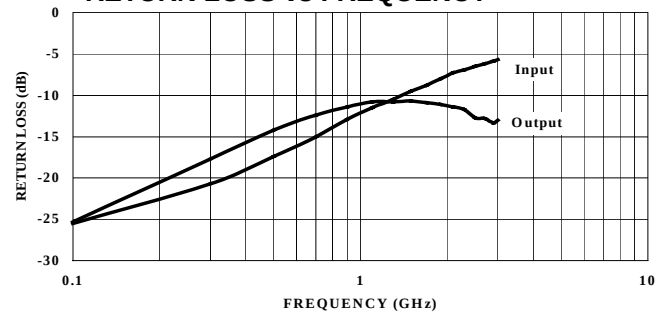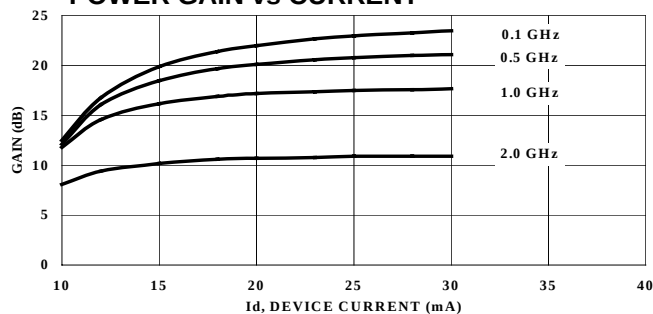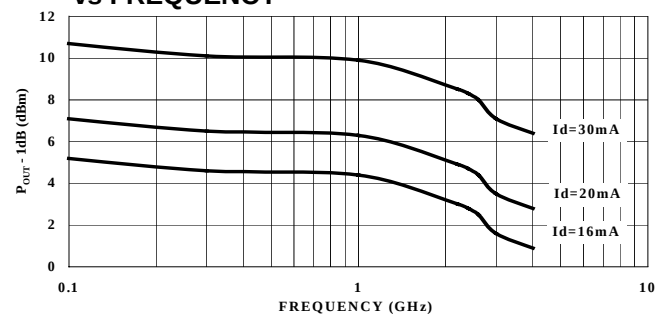Typical Bias Configuration**Typical Performance Curves @ $I_d = 16\text{ mA}$, $T_A = +25^{\circ}\text{C}$ (unless otherwise noted)****DEVICE CURRENT vs DEVICE VOLTAGE****RETURN LOSS vs FREQUENCY****POWER GAIN vs CURRENT** **P_{OUT} @ 1dB GAIN COMPRESSION vs FREQUENCY**

Specification Subject to Change Without Notice

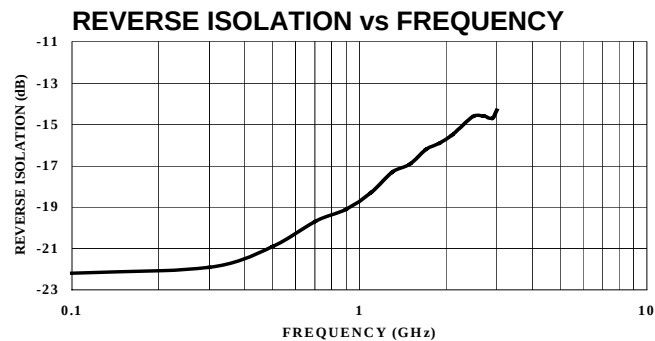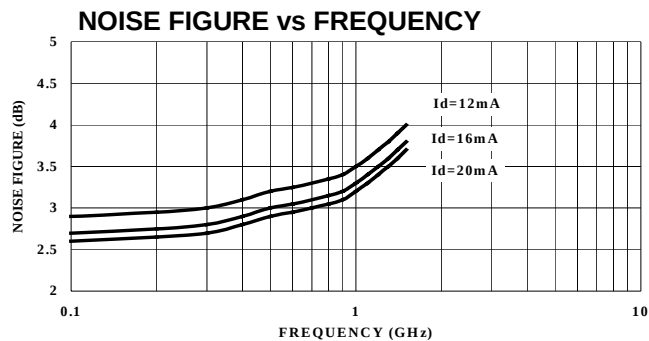

Typical Scattering Parameters


$Z_0 = 50\Omega$, $T_A = +25^\circ\text{C}$, $I_d = 16\text{ mA}$

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	Mag.	Angle	Mag.	Angle	Mag.	Angle	Mag.	Angle
0.1	0.055	-153.1	9.47	171.0	0.076	5.8	0.053	-55.9
0.2	0.068	-148.6	9.30	162.3	0.077	8.4	0.092	-79.0
0.3	0.094	-134.8	8.90	154.3	0.080	16.3	0.131	-101.8
0.4	0.111	-135.4	8.57	146.3	0.083	20.2	0.165	-113.0
0.5	0.134	-133.4	8.29	138.8	0.089	24.9	0.194	-123.2
0.6	0.156	-138.3	7.78	131.9	0.096	27.3	0.215	-135.2
0.7	0.175	-139.3	7.41	125.1	0.103	28.2	0.237	-142.7
0.8	0.200	-140.2	6.93	119.7	0.106	30.6	0.254	-153.5
0.9	0.224	-143.2	6.54	114.0	0.109	31.2	0.266	-159.7
1.0	0.243	-147.8	6.09	109.0	0.118	33.8	0.277	-167.4
1.5	0.334	-164.4	4.55	87.9	0.143	36.5	0.292	167.5
2.0	0.408	177.9	3.48	73.0	0.163	35.7	0.278	148.9
2.5	0.474	163.1	2.79	60.9	0.183	36.2	0.236	135.8
3.0	0.513	150.8	2.34	52.9	0.191	38.3	0.218	130.1

Ordering Information

Long Lead Model No.	Short Lead Model No.	Package
MP4TD0635	MP4TD0636	Ceramic Tape and Reel
MP4TD0635T	MP4TD0636T	

Mico-X Case Styles

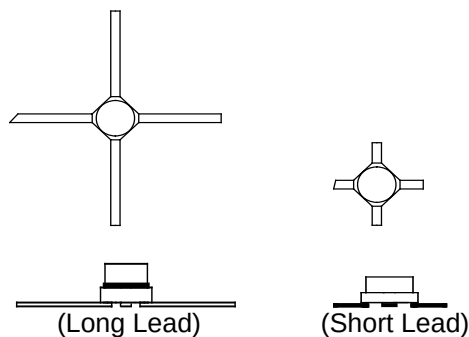

Specification Subject to Change Without Notice

M-Pulse Microwave

PH (408) 432-1480 FX (408) 432-3440