

MPB SERIES

Standard

◆FEATURES

- (TV, display monitor, power supply, lighting Inverter, etc)
- Coated with flame-retardant (UL94 V-0) epoxy resin.
- RoHS compliance.




◆SPECIFICATIONS


Category Temperature Range	-40~+105°C
Rated Voltage (U _R)	250Vdc, 450Vdc, 630Vdc
Capacitance Tolerance	±3%(H), ±5%(J), ±10%(K)
tanδ	0.001max at 1kHz
Voltage Proof	U _R ×150% 60s
Insulation Resistance	C ≤ 0.33μF: 25000MΩmin C > 0.33μF: 7500ΩFmin
Reference Standard	JIS C 5101-16, JIS C 5101-1

◆OUTLINE

(mm)

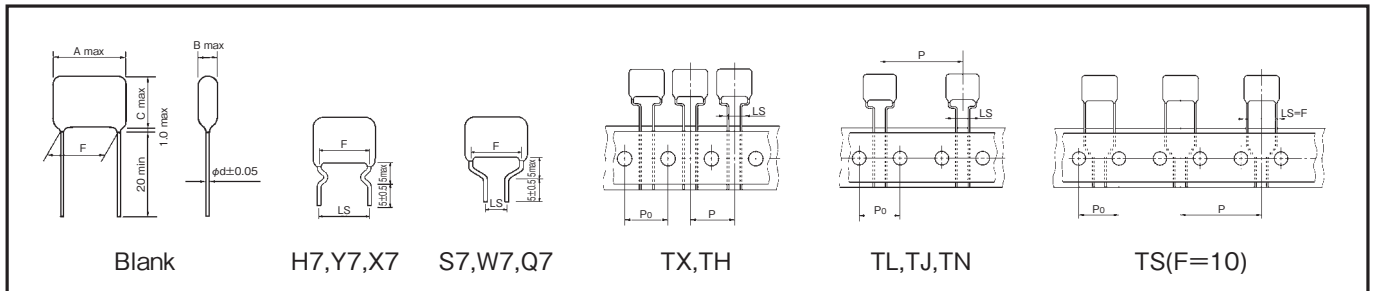

◆PART NUMBER



◆PERMISSIBLE CURRENT FOR FREQUENCY

