


NPN Silicon High Frequency Transistors

... designed for low noise, wide dynamic range front-end amplifiers and low-noise VCO's. Available in two surface-mountable plastic package styles, as well as the popular TO-92 package. This Motorola series of small-signal plastic transistors offers superior quality and performance at low cost.

- High Gain-Bandwidth Product
 $f_T = 8 \text{ GHz (Typ) @ } 50 \text{ mA}$
- Low Noise Figure
 $NF = 2 \text{ dB (Typ) @ } 500 \text{ MHz}$
- High Gain
 $GNF = 17 \text{ dB (Typ) @ } 30 \text{ mA/500 MHz}$
- State-of-the-Art Technology
 Fine Line Geometry
 Ion-Implanted Arsenic Emitters
 Gold Top Metallization and Wires
 Silicon Nitride Passivation
- Tape and Reel Packaging Options
- MMBR571 Available in Low Profile, Add L Suffix

**MPS571
 MXR571
 MMBR571**

**LOW NOISE
 HIGH RF GAIN**



**TO-92
 CASE 29
 MPS571**



**SOT-89
 CASE 345
 MXR571**



**SOT-23
 CASE 318
 MMBR571
 Standard and Low Profile**

MAXIMUM RATINGS

Ratings	Symbol	MPS571	MXR571	MMBR571	Unit
Collector-Emitter Voltage	V_{CEO}	10			Vdc
Collector-Base Voltage	V_{CBO}	20			Vdc
Emitter-Base Voltage	V_{EBO}	3			Vdc
Collector Current — Continuous	I_C	80			mA
Power Dissipation @ $T_A = 25^\circ\text{C}$	P_D	625	400 (Free Air)	200 (Free Air)	mW
Storage Temperature	T_{stg}	-55 to +150			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage (I _C = 0.1 mA, I _B = 0)	V _{(BR)CEO}	10	12	—	V _{dc}
Collector-Base Breakdown Voltage (I _C = 1 mA, I _E = 0)	V _{(BR)CBO}	20	—	—	V _{dc}
Emitter-Base Breakdown Voltage (I _E = 50 μA, I _C = 0)	V _{(BR)EBO}	2.5	—	—	V _{dc}
Collector Cutoff Current (V _{CB} = 8 V, I _E = 0)	I _{CBO}	—	—	10	μA
ON CHARACTERISTICS					
DC Current Gain (I _C = 30 mA, V _{CE} = 5 V)	h _{FE}	50	—	300	—
DYNAMIC CHARACTERISTICS					
Collector-Base Capacitance (V _{CB} = 10 V, I _E = 0, f = 1 MHz)	C _{cb}	—	0.7	1	pF
Current Gain-Bandwidth Product (V _{CE} = 5 V, I _C = 50 mA, f = 1 GHz)	f _T	—	6	—	GHz
			MPS571	—	
			MXR571	—	
			MMBR571	—	
				8	
FUNCTIONAL TESTS					
Gain w/ Noise Figure (I _C = 10 mA, V _{CE} = 5 V)					
	MPS571	f = 0.5 GHz	—	14	—
		f = 1 GHz	—	9	—
	MXR571	f = 0.5 GHz	—	15	—
		f = 1 GHz	—	9.5	—
	MMBR571	f = 0.5 GHz	—	16.5	—
		f = 1 GHz	—	10.5	—
Noise Figure (I _C = 10 mA, V _{CE} = 5 V)					
	MPS571	f = 0.5 GHz	—	2	—
		f = 1 GHz	—	2.6	—
	MXR571	f = 0.5 GHz	—	2.1	—
		f = 1 GHz	—	2.7	—
	MMBR571	f = 0.5 GHz	—	2	—
		f = 1 GHz	—	2.6	—

3

Figure 1. Maximum Available Gain versus Frequency

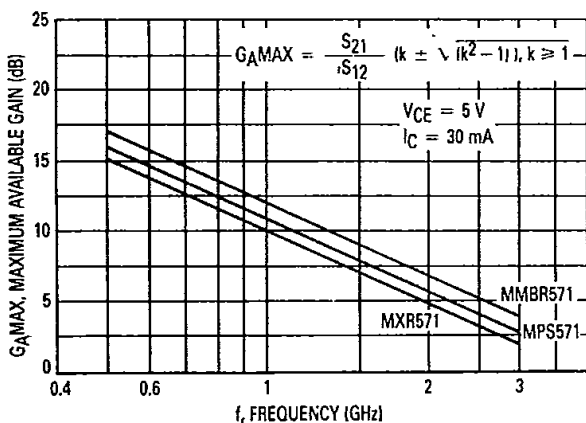


Figure 2. Current Gain-Bandwidth versus Collector Current @ 1 GHz

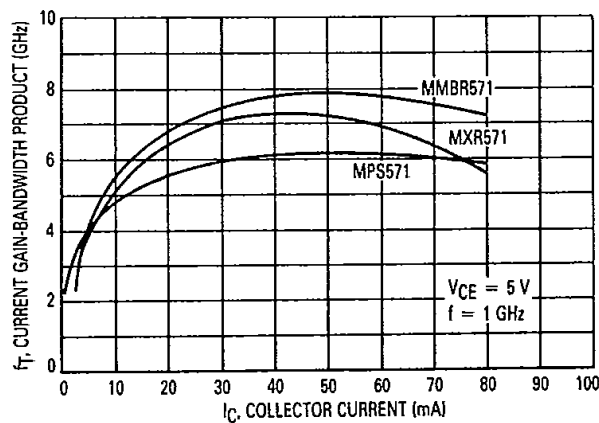


Figure 3. Input Capacitance versus Emitter Base Voltage

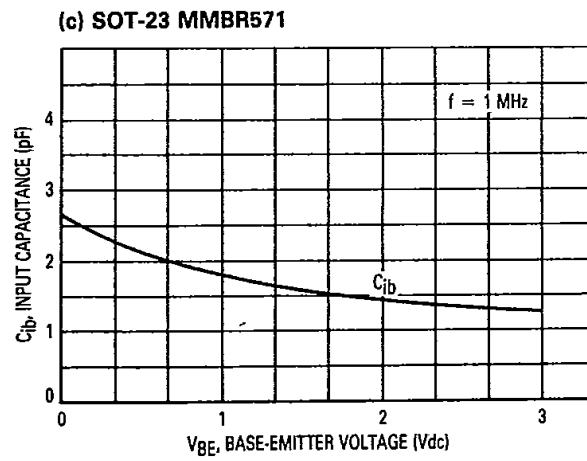
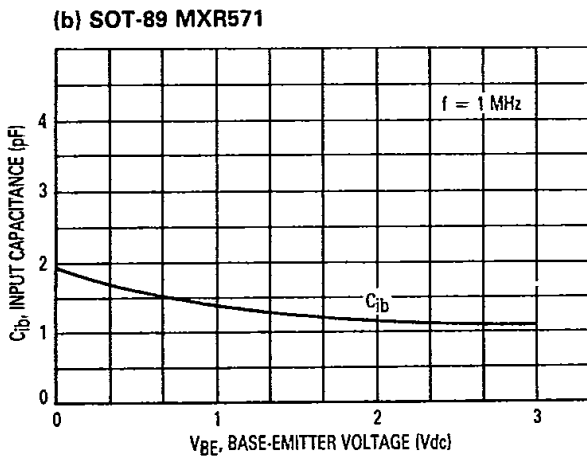
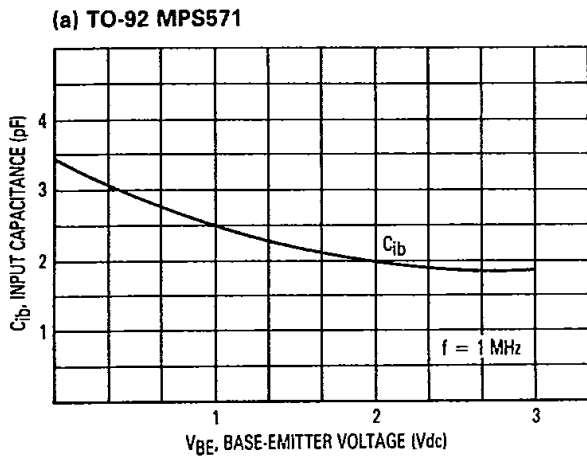


Figure 4. Output Capacitances versus Collector-Base Voltage

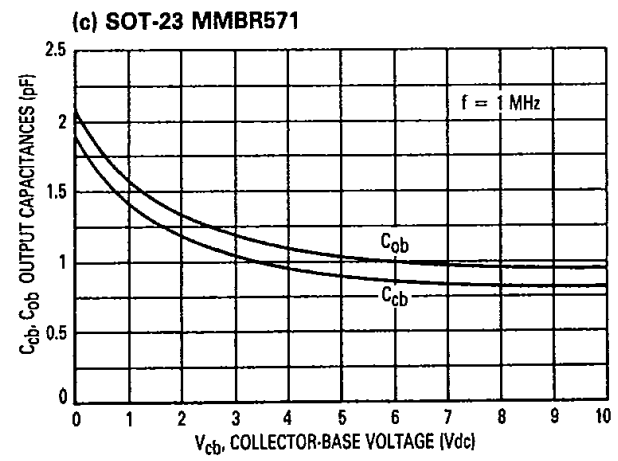
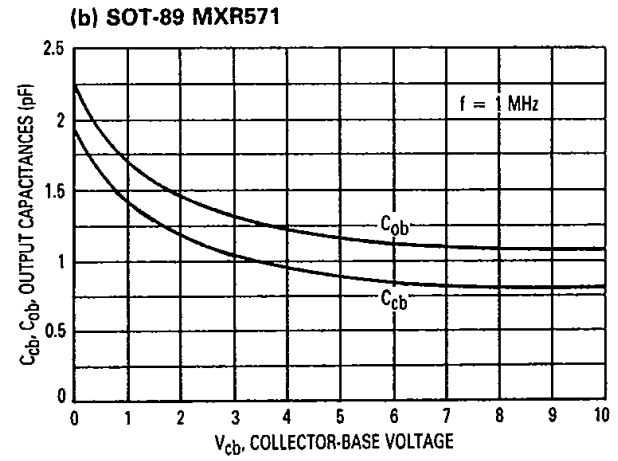
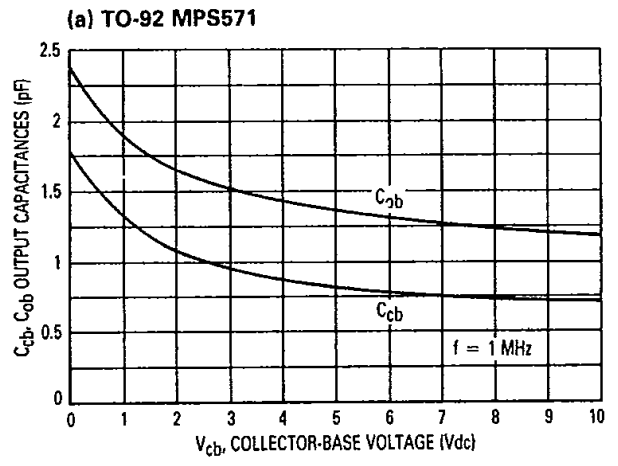


Figure 5. Gain at Noise Figure versus Collector Current

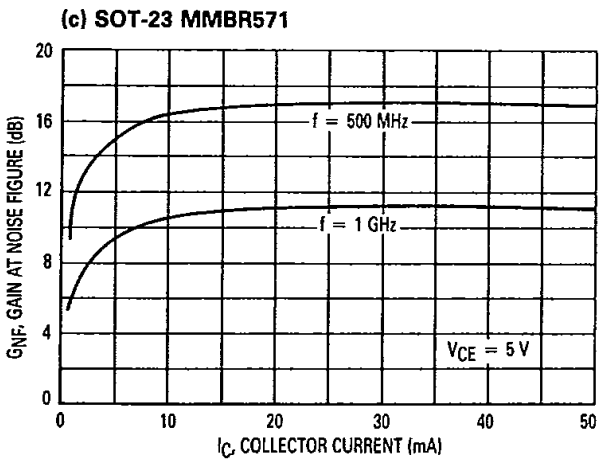
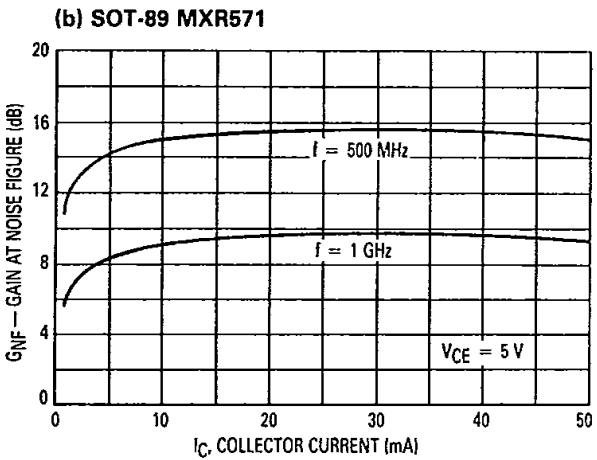
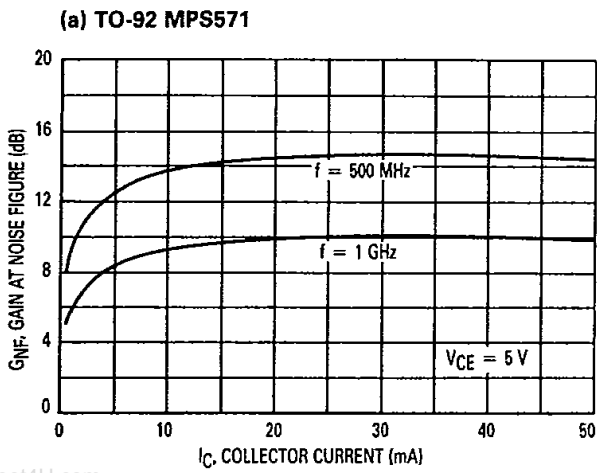


Figure 6. Noise Figure versus Collector Current

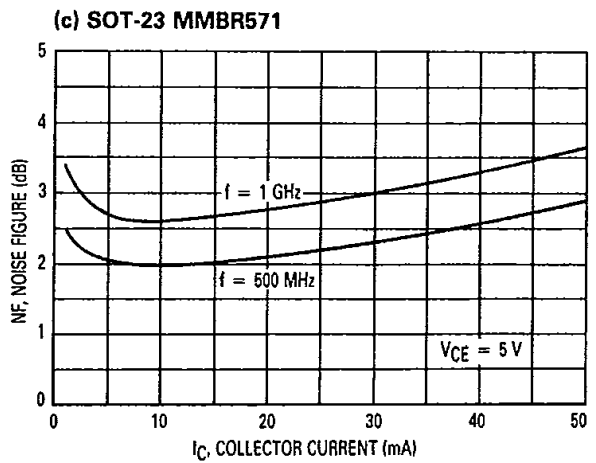
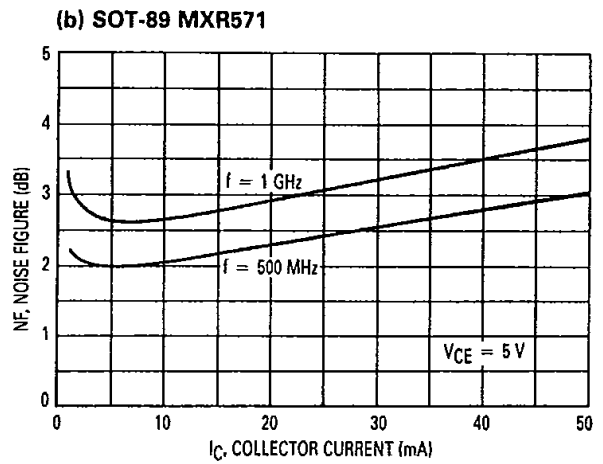
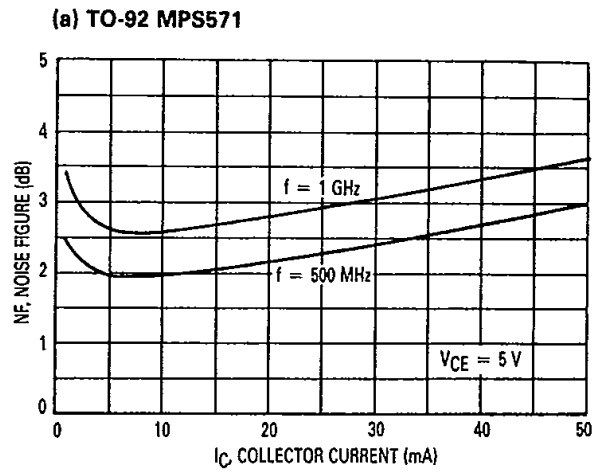


Figure 7. Gain at Noise Figure and Noise Figure versus Frequency







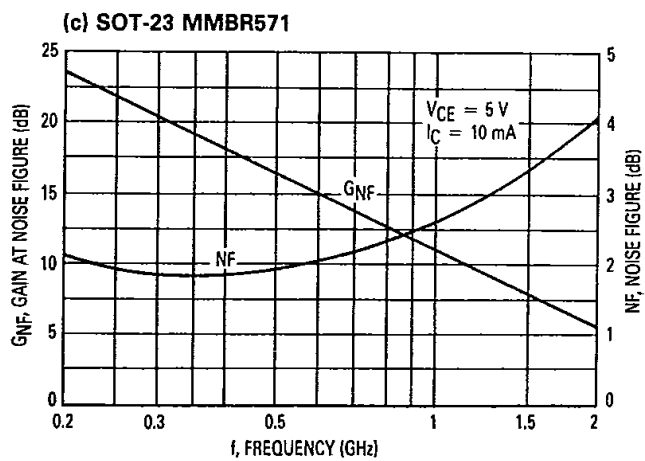


Figure 8. Maximum Unilateral Gain and Insertion Gain versus Frequency

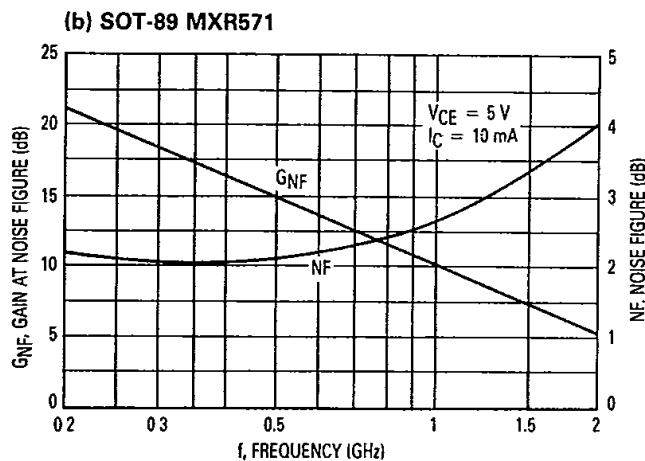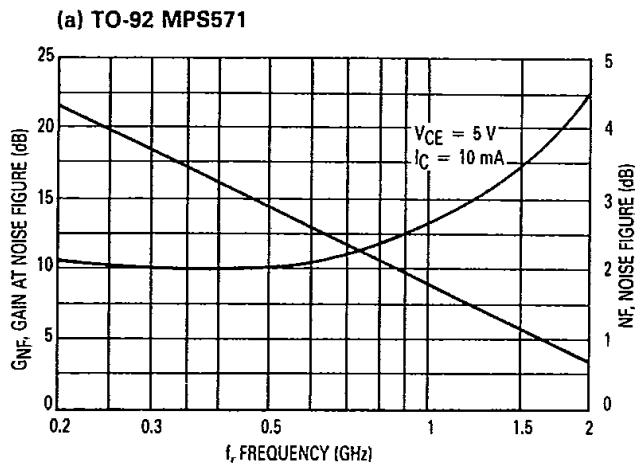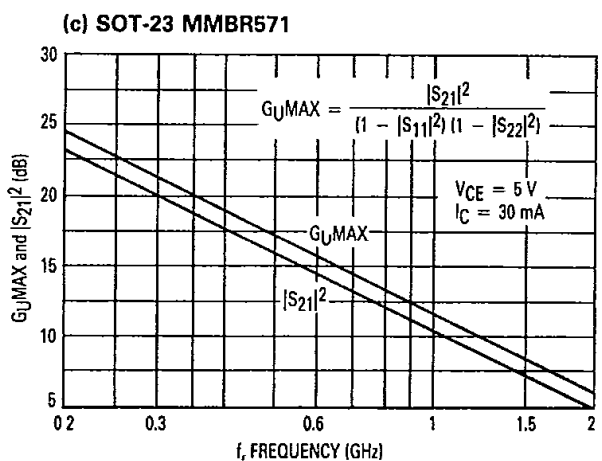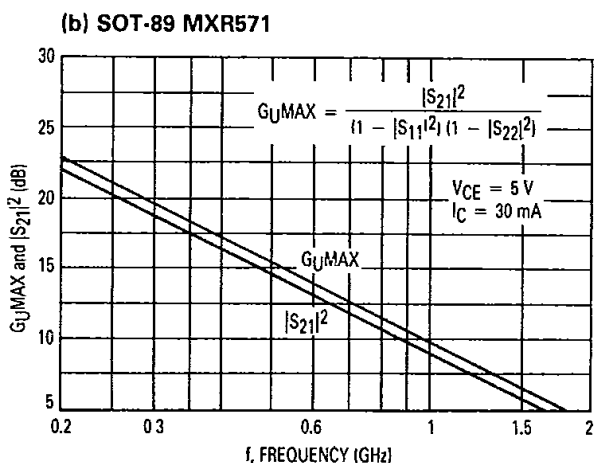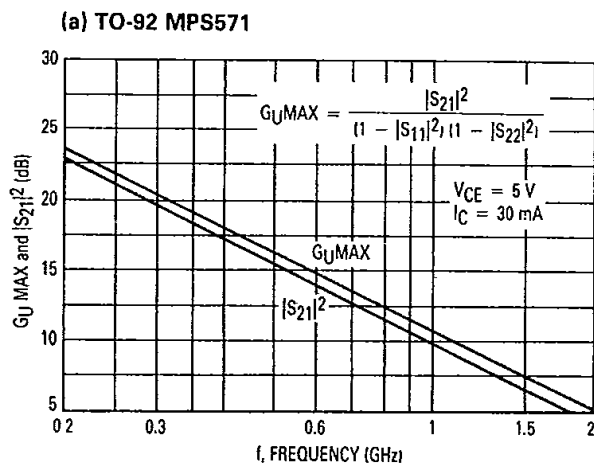


3

INPUT/OUTPUT REFLECTION COEFFICIENTS
 versus FREQUENCY
 VCE = 5 V, IC = 30 mA

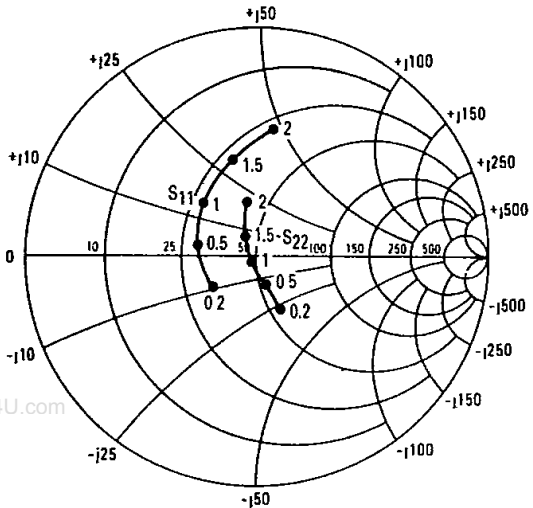


FORWARD/REVERSE TRANSMISSION COEFFICIENTS
 versus FREQUENCY
 VCE = 5 V, IC = 30 mA

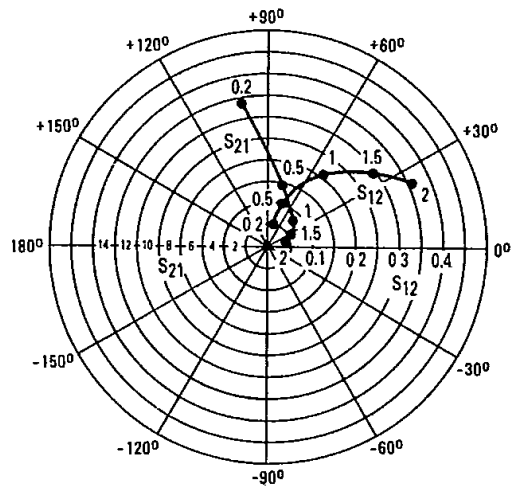


COMMON EMITTER S-PARAMETERS

VCE (Volts)	IC (mA)	f (MHz)	S11		S21		S12		S22	
			S11	∠ϕ	S21	∠ϕ	S12	∠ϕ	S22	∠ϕ
5	5	200	0.62	-80	8.22	122	0.07	56	0.63	-44
		500	0.40	-148	4.52	87	0.11	50	0.36	-58
		1000	0.39	155	2.51	54	0.16	48	0.23	-78
		1500	0.46	122	1.86	32	0.23	42	0.15	-114
		2000	0.59	100	1.50	14	0.31	33	0.14	173
15	15	200	0.33	-121	12.88	105	0.05	67	0.37	-59
		500	0.28	-175	5.62	79	0.10	65	0.18	-67
		1000	0.32	143	2.99	53	0.19	55	0.08	-94
		1500	0.40	117	2.14	32	0.27	42	0.07	171
		2000	0.55	95	1.74	17	0.35	30	0.198	117
30	30	200	0.23	-143	13.65	99	0.05	75	0.26	-62
		500	0.23	169	5.75	76	0.11	70	0.13	-68
		1000	0.30	130	3.05	50	0.21	55	0.04	-136
		1500	0.41	106	2.11	28	0.29	38	0.12	130
		2000	0.56	85	1.70	11	0.36	23	0.26	102
50	50	200	0.21	-158	13.96	96	0.05	79	0.21	-61
		500	0.23	162	5.82	75	0.11	72	0.11	-66
		1000	0.30	128	3.09	49	0.21	56	0.03	-149
		1500	0.41	105	2.11	28	0.29	39	0.12	127
		2000	0.56	84	1.70	11	0.36	23	0.27	100

**INPUT/OUTPUT REFLECTION COEFFICIENTS
versus FREQUENCY**
VCE = 5 V, IC = 30 mA

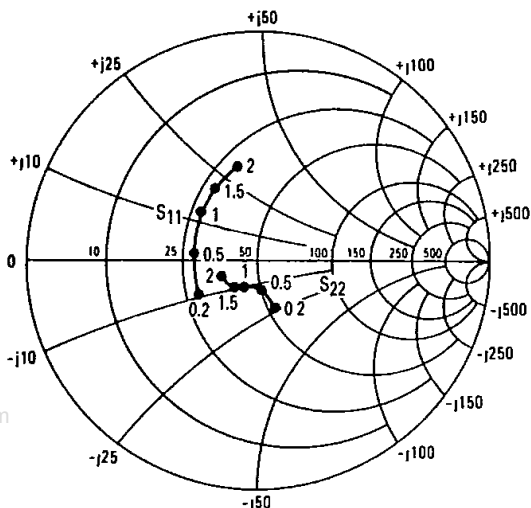

**FORWARD/REVERSE TRANSMISSION
COEFFICIENTS versus FREQUENCY**
VCE = 5 V, IC = 30 mA

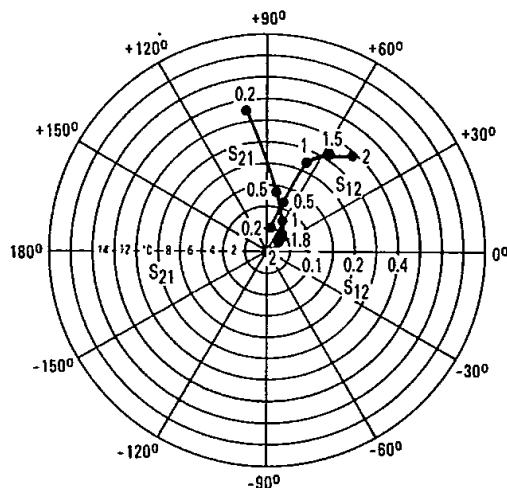


www.DataSheet4U.com

3


COMMON EMITTER S-PARAMETERS

VCE (Volts)	IC (mA)	f (MHz)	S11		S21		S12		S22	
			S11	∠φ	S21	∠φ	S12	∠φ	S22	∠φ
5	5	200	0.60	-84	7.94	120	0.08	56	0.58	-45
		500	0.39	-152	4.17	86	0.11	54	0.34	-56
		1000	0.39	161	2.32	62	0.19	58	0.27	-71
		1500	0.44	132	1.64	45	0.26	55	0.25	-90
		2000	0.49	106	1.33	31	0.32	52	0.26	-106
	15	200	0.33	-126	11.89	101	0.06	67	0.32	-63
		500	0.29	-178	5.13	81	0.11	69	0.18	-73
		1000	0.33	148	2.75	62	0.22	65	0.15	-99
		1500	0.37	123	1.93	47	0.30	56	0.16	-118
		2000	0.42	100	1.55	34	0.37	49	0.17	-139
	30	200	0.28	-149	12.74	97	0.05	74	0.23	-69
		500	0.27	174	5.37	79	0.11	73	0.13	-82
		1000	0.32	144	2.85	62	0.22	66	0.13	-112
		1500	0.36	120	2.02	47	0.31	57	0.15	-132
		2000	0.40	98	1.62	35	0.38	49	0.17	-152
	50	200	0.26	-162	13.03	94	0.05	77	0.18	-71
		500	0.27	169	5.43	79	0.12	75	0.11	-85
		1000	0.32	142	2.88	62	0.22	67	0.12	-117
		1500	0.36	119	2.02	47	0.31	57	0.15	-137
		2000	0.40	97	1.60	35	0.38	49	0.17	-155

INPUT/OUTPUT REFLECTION COEFFICIENTS
 versus FREQUENCY
 $V_{CE} = 5\text{ V}, I_C = 30\text{ mA}$

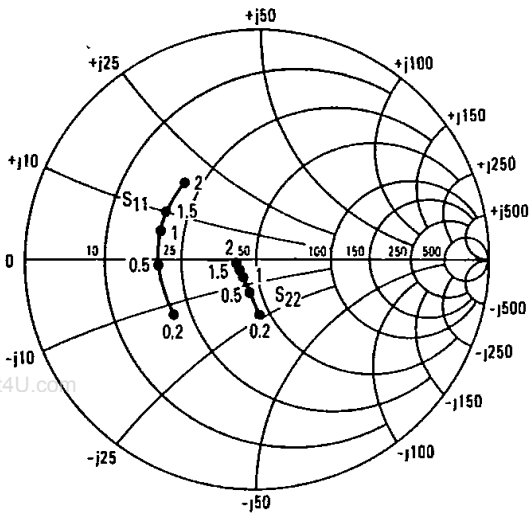


FORWARD/REVERSE TRANSMISSION COEFFICIENTS
 versus FREQUENCY
 $V_{CE} = 5\text{ V}, I_C = 30\text{ mA}$

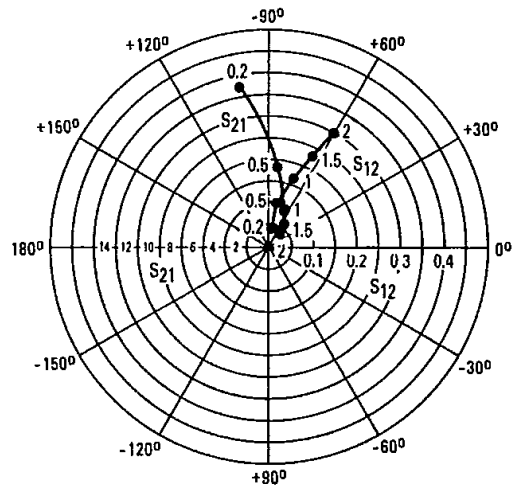

COMMON EMITTER S-PARAMETERS

V _{CE} (Volts)	I _C (mA)	f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
			S ₁₁	∠φ	S ₂₁	∠φ	S ₁₂	∠φ	S ₂₂	∠φ
5	5	200	0.68	-82	8.41	126	0.07	53	0.61	-45
		500	0.52	-142	4.62	93	0.10	46	0.35	-60
		1000	0.50	179	2.57	72	0.14	53	0.26	-71
		1500	0.51	161	1.82	57	0.19	58	0.24	-77
		2000	0.52	143	1.48	45	0.24	59	0.22	-86
	15	200	0.46	-125	13.65	108	0.05	60	0.35	-73
		500	0.43	-169	6.03	86	0.09	66	0.17	-94
		1000	0.44	168	3.20	72	0.16	67	0.14	-111
		1500	0.45	152	2.21	58	0.22	64	0.11	-118
		2000	0.46	137	1.80	48	0.29	59	0.10	-131
	30	200	0.42	-148	14.79	102	0.04	68	0.26	-87
		500	0.41	-177	6.31	84	0.09	72	0.14	-115
		1000	0.42	165	3.35	71	0.16	70	0.12	-135
		1500	0.44	151	2.29	59	0.23	65	0.11	-144
		2000	0.44	135	1.84	48	0.30	60	0.10	-157
50	200	0.41	-159	15.14	98	0.04	73	0.21	-96	
	500	0.42	179	6.38	83	0.09	75	0.13	-124	
	1000	0.43	163	3.35	70	0.16	71	0.12	-143	
	1500	0.44	148	2.32	58	0.23	66	0.10	-151	
	2000	0.45	134	1.84	48	0.30	60	0.09	-163	

OUTLINE DIMENSIONS

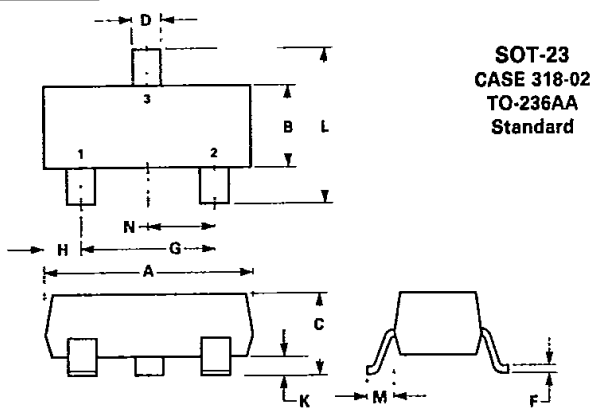


**SOT-23
CASE 318-02
TO-236AA
Standard**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.1102	0.1197
B	1.20	1.40	0.0472	0.0551
C	0.85	1.20	0.033	0.0472
D	0.37	0.46	0.0150	0.0177
F	0.065	0.130	0.0026	0.0051
G	1.78	2.04	0.0701	0.0807
H	0.51	0.60	0.0200	0.0236
K	0.10	0.25	0.0040	0.0098
L	2.10	2.50	0.0830	0.0984
M	0.45	0.60	0.0180	0.0236
N	0.63	1.02	0.0250	0.0401

STYLE 6
PIN 1 BASE
2. EMITTER
3. COLLECTOR

NOTES
1. DIMENSIONING AND TOLERANCING PER ANSI
2. Y14.5M, 1982.
CONTROLLING DIMENSION: MILLIMETERS

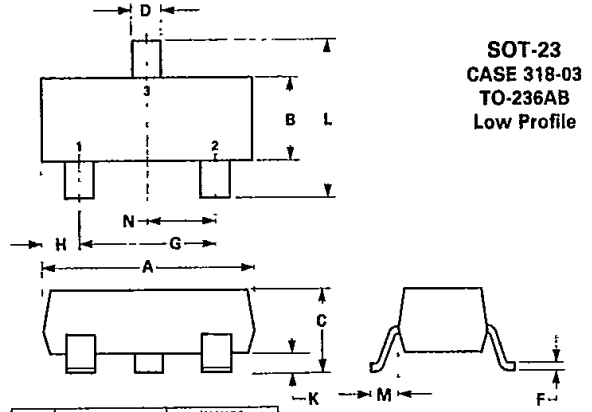

**SOT-23
CASE 318-03
TO-236AB
Low Profile**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.60	3.04	0.1102	0.1197
B	1.20	1.40	0.0472	0.0551
C	0.89	1.11	0.035	0.044
D	0.37	0.46	0.015	0.0177
F	0.065	0.130	0.0026	0.0051
G	1.78	2.04	0.0701	0.0807
H	0.51	0.60	0.0200	0.0236
K	0.013	0.100	0.0005	0.0040
L	2.10	2.50	0.0830	0.0984
M	0.45	0.60	0.018	0.0236
N	0.69	1.02	0.0350	0.0401


STYLE 6
PIN 1 BASE
2. EMITTER
3. COLLECTOR

NOTES
1. DIMENSIONING AND TOLERANCING PER ANSI
2. Y14.5M, 1982.
CONTROLLING DIMENSION: MILLIMETERS


NOTES
1. CONTOUR OF PACKAGE BEYOND ZONE "P" IS UNCONTROLLED.
2. DIM "F" APPLIES BETWEEN "H" AND "L". DIM "D" & "S" APPLIES BETWEEN "L" & 12.70 mm (0.5") FROM SEATING PLANE. LEAD DIM IS UNCONTROLLED IN "H" & BEYOND 12.70 mm (0.5") FROM SEATING PLANE

STYLE 2
PIN 1. BASE
2. EMITTER
3. COLLECTOR

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.32	5.33	0.170	0.210
B	4.44	5.21	0.175	0.205
C	3.18	4.19	0.125	0.165
D	0.41	0.56	0.016	0.022
F	0.41	0.48	0.016	0.019
G	1.14	1.40	0.045	0.055
H	—	2.54	—	0.100
J	2.41	2.67	0.095	0.105
K	12.70	—	0.500	—
L	6.35	—	0.250	—
N	2.03	2.67	0.080	0.105
P	2.92	—	0.115	—
R	3.43	—	0.135	—
S	0.36	0.41	0.014	0.016

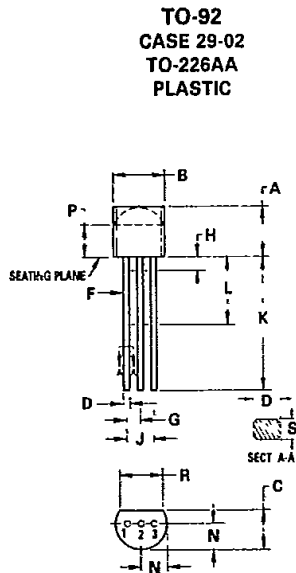

**TO-92
CASE 29-02
TO-226AA
PLASTIC**

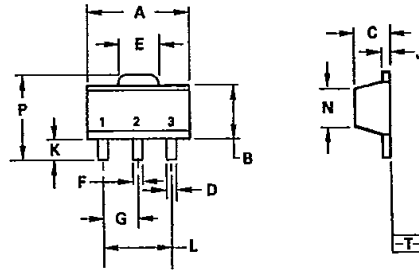

**SOT-89
CASE 345-01
PLASTIC**

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.40	4.60	0.174	0.181
B	2.29	2.60	0.091	0.102
C	1.40	1.60	0.056	0.062
D	0.36	0.48	0.015	0.018
E	1.62	1.80	0.064	0.070
F	0.44	0.53	0.018	0.020
G	1.50 BSC	—	0.059 BSC	—
J	0.35	0.44	0.014	0.017
K	0.80	1.04	0.032	0.040
L	3.00 BSC	—	0.118 BSC	—
N	2.04	2.28	0.081	0.089
P	3.94	4.25	0.156	0.167

STYLE 1
PIN 1 BASE
2. COLLECTOR
3. EMITTER

NOTES
1. DIMENSIONS A AND B ARE DATUMS.
2. -T- IS SEATING PLANE.
3. POSITIONAL TOLERANCE FOR LEADS
Ⓢ 0.10 (0.004) Ⓢ T | B Ⓢ A Ⓢ
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973
5. CONTROLLING DIM. MILLIMETERS