



MPSA13

NPN EPITAXIAL SILICON TRANSISTOR


DARLINGTON TRANSISTOR

DESCRIPTION

The UTC **MPSA13** is a Darlington transistor.

FEATURES

* Collector-Emitter Voltage: $V_{CES} = 30V$

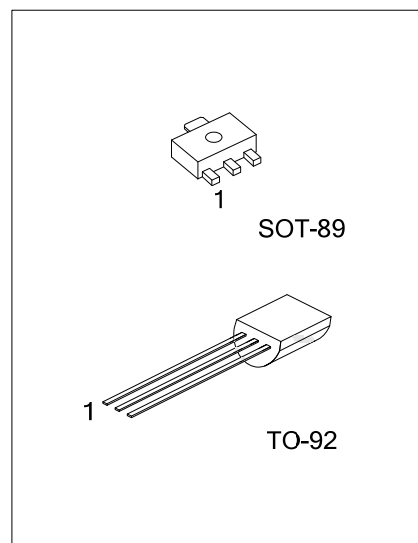

ORDERING INFORMATION

Order Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
-	MPSA13G-AB3-A-R	SOT-89	E	C	B	Tape Reel
-	MPSA13G-AB3-F-R	SOT-89	B	C	E	Tape Reel
MPSA13L-T92-B	MPSA13G-T92-B	TO-92	E	B	C	Tape Box
MPSA13L-T92-K	MPSA13G-T92-K	TO-92	E	B	C	Bulk
MPSA13L-T92-A-B	MPSA13G-T92-A-B	TO-92	E	C	B	Tape Box
MPSA13L-T92-A-K	MPSA13G-T92-A-K	TO-92	E	C	B	Bulk

Note: Pin assignment: E: Emitter C: Collector B: Base

MPSA13L-T92-A-B	
(1) Packing Type	(1) B: Tape Box, K: Bulk, R: Tape Reel
(2) Pin Assignment	(2) refer to Pin Assignment
(3) Package Type	(3) AB3: SOT-89, T92: TO-92
(4) Green Package	(4) L: Lead Free, G: Halogen Free

MARKING

SOT-89	TO-92
<p>Pin Code Date Code</p>	<p>UTC MPSA13 Pin Code Date Code</p>

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CES}	30	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	500	mA
Collector Dissipation	P_C	625	mW
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$




Note: Absolute maximum ratings are those values beyond which the device Could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage	BV_{CES}	$I_C=100\mu\text{A}$, $I_B=0$	30			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=30\text{V}$, $I_E=0$			100	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=10\text{V}$, $I_C=0$			100	nA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}$, $I_C=100\text{mA}$	10000			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=100\text{mA}$, $I_B=0.1\text{mA}$			1.5	V
Base-Emitter on Voltage	$V_{BE(ON)}$	$V_{CE}=5\text{V}$, $I_C=100\text{mA}$			2.0	V
Current Gain Bandwidth Product	f_T	$V_{CE}=5\text{V}$, $I_C=10\text{mA}$, $f=100\text{MHz}$	125			MHz

Note: Pulse test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle=2%

■ TYPICAL CHARACTERISTICS

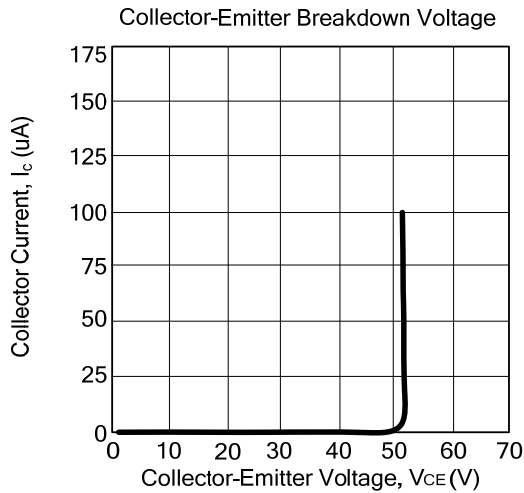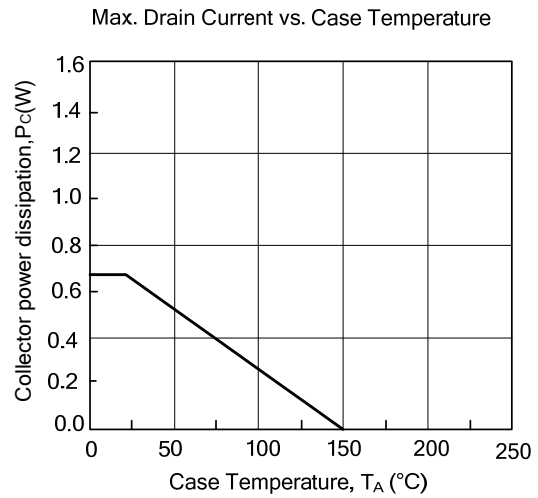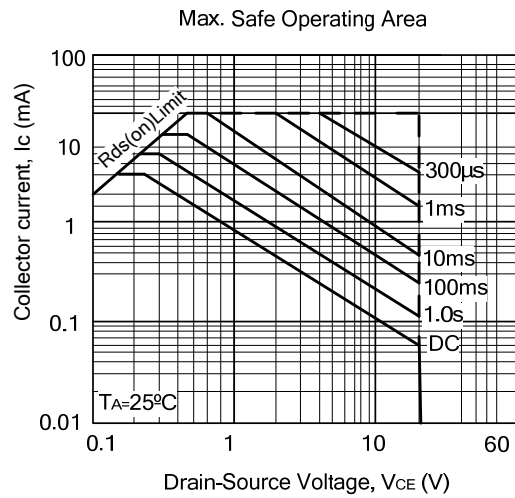

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.