

Class AB Stereo Headphone Driver, Low voltage Volume Controller -79~+15dB With Soft Step Input Gain 0~+15dB

FEATURES

- Operation range: 2.5V~6.5V.
- Soft step volume control : -79dB ~ +15dB.
- Input Gain: 0dB ~ +15dB.
- Low power consumption.
- Good PSRR and low pop noise.
- I²C interface.
- Housed in 10 pin MSOP package.


APPLICATIONS

- Multimedia system.
- Hi-Fi audio system.
- Bluetooth.
- DAB

DESCRIPTION


The MS6282 is a class AB headphone drivers with audio volume controller, It has Input gain(0 ~ +15dB), Soft step volume control(-79dB ~ +15dB) with programmable blend times. It uses CMOS technology specially for the low voltage application with low noise, rail-to-rail output.

BLOCK DIAGRAM

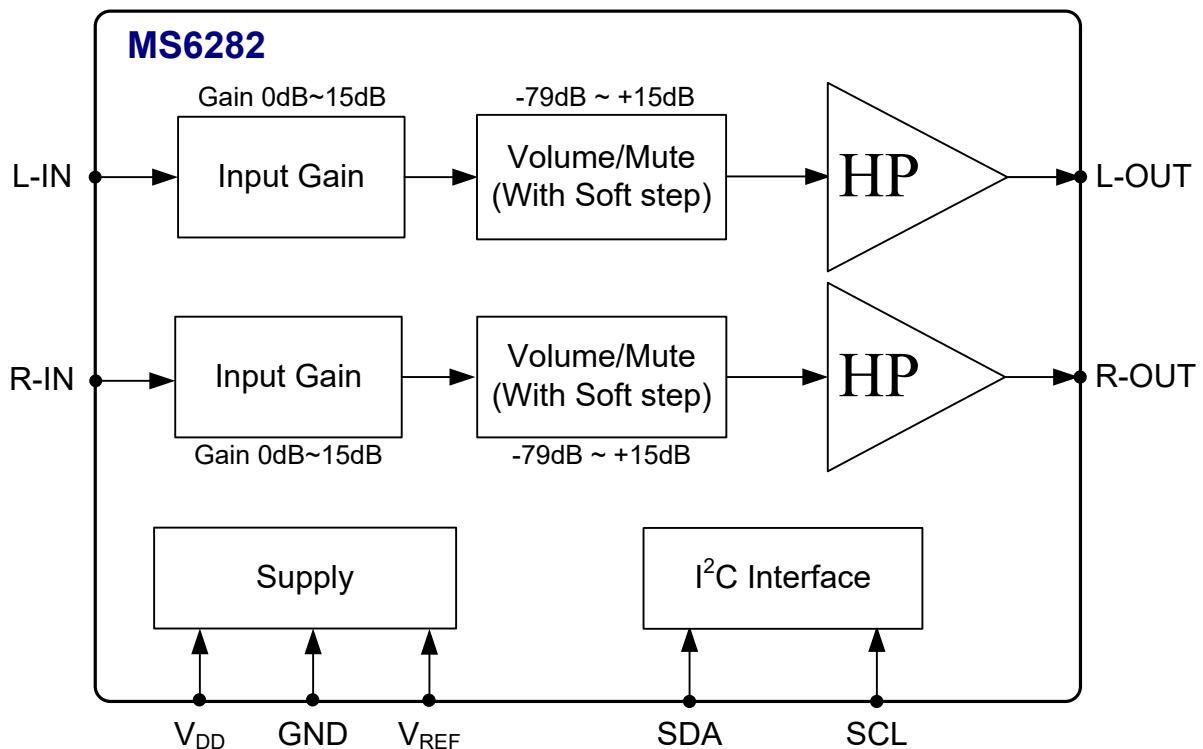

PIN CONFIGURATION

Symbol	Pin	Description
NC	1	No Connected
L-IN	2	Left Channel Input
L-OUT	3	Left Channel Output
V _{SS}	4	Ground
SDA	5	I ² C Data Input
SCL	6	I ² C Clock Input
V _{DD}	7	Positive Supply Voltage
R-OUT	8	Right Channel Output
R-IN	9	Right Channel Input
V _{REF}	10	Reference Voltage = 1/2V _{DD}

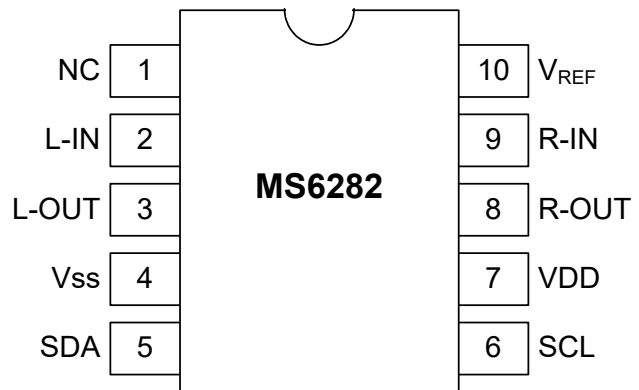

ORDERING INFORMATION

Package	Part number	Packaging Marking	Transport Media
10-Pin MSOP (lead free)	MS6282MGTR	6282G	3.5k Units Tape and Reel
10-Pin MSOP (lead free)	MS6282MGU	6282G	80 Units Tube

RoHS Compliance

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Rating	Unit
V _{DD}	Supply Voltage	6.5	V
V _{ESD}	Electrostatic Handling	-3000 to 3000	V
T _{STG}	Storage Temperature Range	-65 to 150	°C
T _A	Operating Ambient Temperature Range	-40 to 85	°C
T _J	Maximum Junction Temperature	120	°C
T _S	Soldering Temperature, 10 seconds	260	°C
R _{THJA}	Thermal Resistance from Junction to Ambient in Free Air MSOP10	165.9	°C/W

OPERATING RATINGS

Symbol	Parameter	Min	Typ	Max	Unit
V _{DD}	Supply Voltage	2.5	-	6.5	V

5V ELECTRICAL CHARACTERISTICS(Ta=25°C; V_{DD}=5V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Supply						
I _Q	Quiescent Current	V _{IN} =0V	-	6	-	mA
I _{PD}	Power down current	V _{IN} =0V	-	130	-	uA
PSRR	Power Supply Rejection Ratio	f = 100Hz	55	58	-	dB
Input Selectors						
R _{IN}	Input Resistance			100		kΩ
G _{IN}	Input Gain Range	Gain	0	-	15	dB
G _{STEP}	Step Resolution		-	1	-	dB
ERR _G	Gain Setting error		-0.2	0	0.2	dB
Volume control						
CR _{VOL}	Volume Control Range	Attenuation & Gain	-79	-	+15	dB
RES _{VOL}	Volume Step Resolution		-	1	-	dB
ERR _{VOL}	Volume Setting Error	A _v = +15 to -40dB	-0.5	0	1	dB
		A _v = -40 to -79dB	-1	0	5	dB
MUTE	Mute Attenuation	V _{in} =0dBV		-90		dB
General						
VO _{MAX}	Maximum Output Voltage Swing	(THD+N)/S <0.1%	-	1.45	-	Vrms
THD+N	Total Harmonic Distortion Plus Noise	V _{OUT} = 1Vrms	-	-64	-	dB
			-	0.063	-	%
S/N	Signal-to-Noise Ratio	V _{OUT} = 1Vrms	-	93	-	dB
Bus Input						
V _{IH}	Bus High Input Level		1.8	-	-	V
V _{IL}	Bus Low Input Level		-	-	0.8	V

3.3V ELECTRICAL CHARACTERISTICS(Ta=25°C; V_{DD}=3.3V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)










Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Supply						
I _Q	Quiescent Current	V _{IN} =0V	-	5.4	-	mA
I _{PD}	Power down current	V _{IN} =0V	-	82	-	uA
PSRR	Power Supply Rejection Ratio	f = 100Hz	65	70	-	dB
General						
VO _{MAX}	Maximum Output Voltage Swing	(THD+N)/S <0.1%	-	1	-	Vrms
THD+N	Total Harmonic Distortion Plus Noise	V _{OUT} = 0.707Vrms	-	-65	-	dB
			-	0.056	-	%
S/N	Signal-to-Noise Ratio	V _{OUT} = 0.707Vrms	-	90	-	dB

2.5V ELECTRICAL CHARACTERISTICS(Ta=25°C; V_{DD}=2.5V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Supply						
I _Q	Quiescent Current	V _{IN} =0V	-	4.6	-	mA
I _{PD}	Power down current	V _{IN} =0V	-	60	-	uA
PSRR	Power Supply Rejection Ratio	f = 100Hz	60	65	-	dB
General						
VO _{MAX}	Maximum Output Voltage Swing	(THD+N)/S <0.1%	-	0.707	-	V _{rms}
THD+N	Total Harmonic Distortion Plus Noise	V _{OUT} = 0.707V _{rms}	-	-65	-	dB
			-	0.056	-	%
S/N	Signal-to-Noise Ratio	V _{OUT} = 0.707V _{rms}	-	90	-	dB

TYPICAL PERFORMANCE CHARACTERISTICS


($T_a=25^{\circ}\text{C}$; $R_L=32\Omega$; $C_{REF}=1\mu\text{F}$; refer to the application circuit; unless otherwise specified)

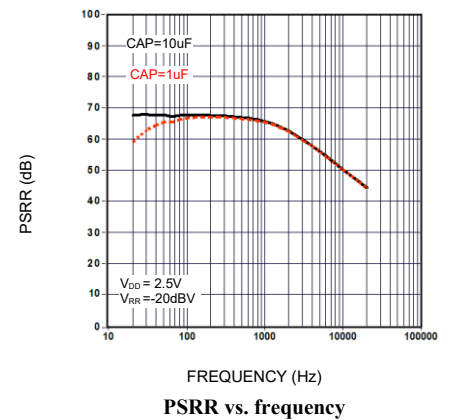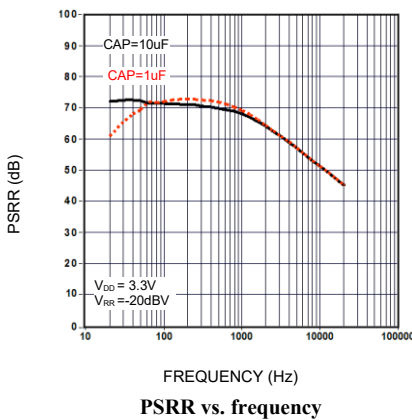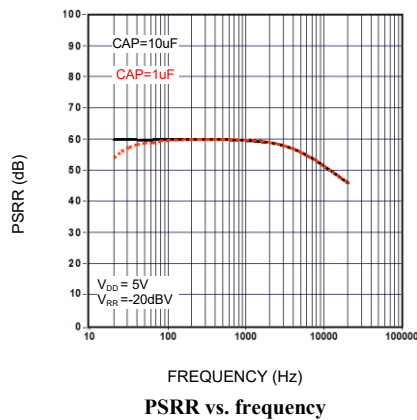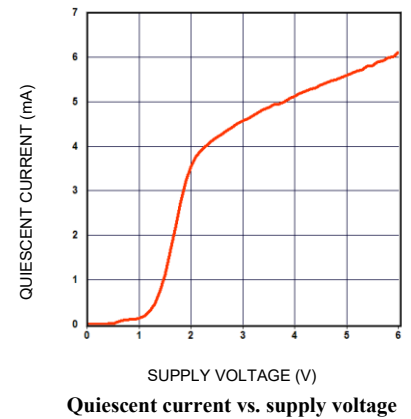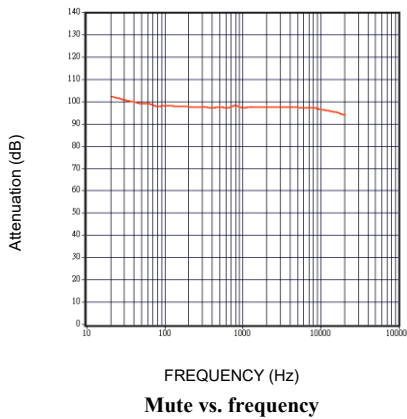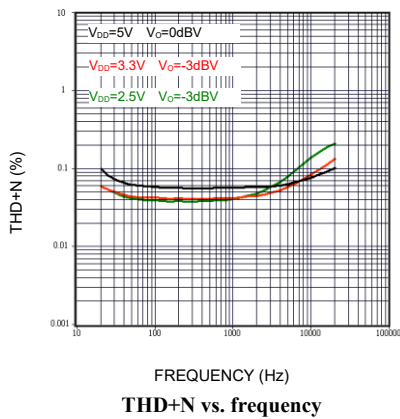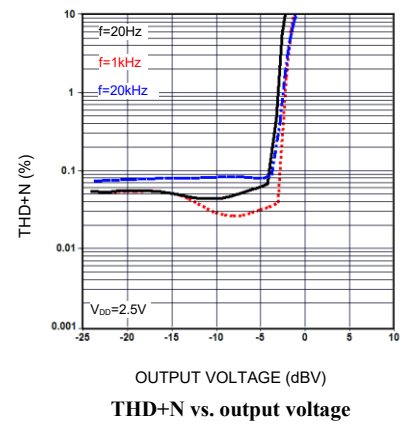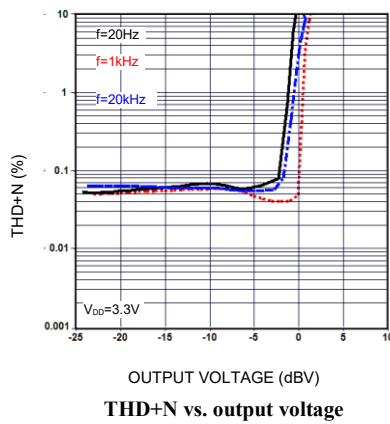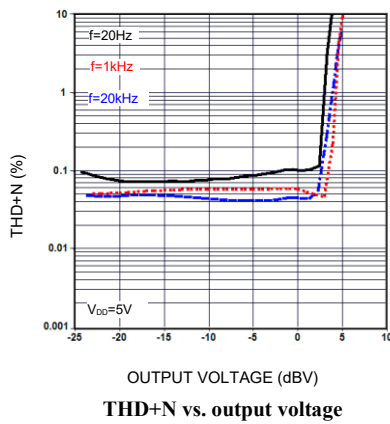

I²C BUS DESCRIPTION

Start and stop conditions


A start condition is activated when the SCL is set to HIGH and SDA shifts from HIGH to LOW state. The stop condition is activated when SCL is set to HIGH and SDA shifts from LOW to HIGH state. Please refer to the timing diagram below.

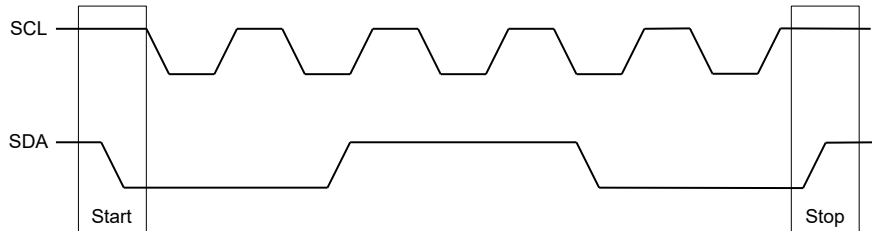

SCL : Serial Clock Line, SDA : Serial Data Line

Data validity

A data on the SDA line is considered valid and stable only when the SCL signal is in HIGH state. The HIGH and LOW states of the SDA line can only change when the SCL signal is LOW. Please refer to the figure below.

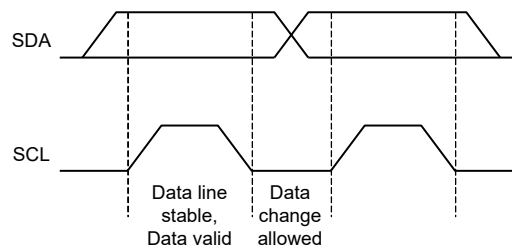


Byte format

Every byte transmitted to the SDA line consists of 8 bits. Each byte must be followed by an acknowledge bit. The MSB is transmitted first.

Acknowledge


During the Acknowledge clock pulse, the master (up) put a resistive HIGH level on the SDA line. The peripheral (audio processor) that acknowledges has to pull-down (LOW) the SDA line during the Acknowledge clock pulse so that the SDA line is in a stable LOW state during this clock pulse. Please refer to the diagram below.

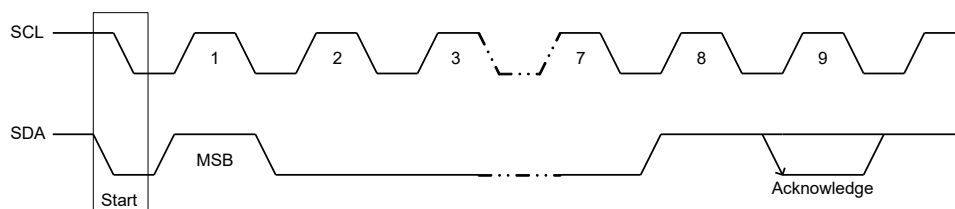

The audio processor that has been addressed has to generate an Acknowledge after receiving each byte, otherwise, the SDA line will remain at the HIGH level during the ninth (9th) clock pulse. In this case, the master transmitter can generate the STOP information in order to abort the transfer.

BUS INTERFACE


Data are transmitted to and from the MCU to the MS6282 via the SDA and SCL. The SDA and SCL make up the BUS interface. It should be noted that pull-up resistors must be connected to the positive supply voltage.

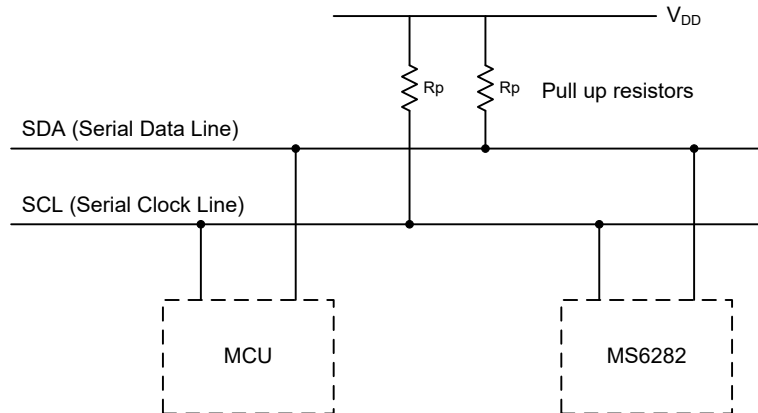

Interface protocol


The format consists of the following

- A START condition
- A chip address byte including the MS6282 address. (7bits)
- The 8th bit of the byte must be "0".
- The MS6282 must always acknowledge the end of each transmitted byte.
- A data sequence (N-bytes + Acknowledge)
- A STOP condition

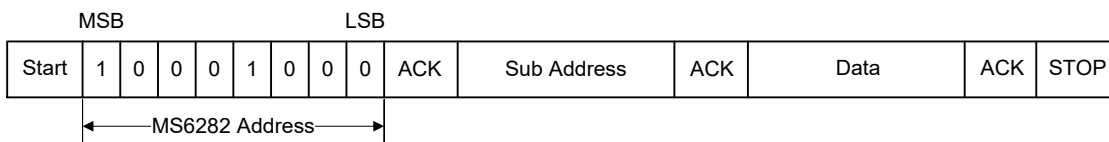

Chip Address

The chip address of the MS6282 is 88H.



SubAddress

MSB							LSB	Function
A7	A6	A5	A4	A3	A2	A1	A0	
0	0	0	0	0	0	0	0	Soft-step time / ON/OFF
0	0	0	0	0	0	0	1	L-channel Input Gain Control
0	0	0	0	0	0	1	0	R-channel Input Gain Control
0	0	0	0	0	0	1	1	Both channels Input Gain Control
0	0	0	0	0	1	0	0	L-channel Volume Control
0	0	0	0	0	1	0	1	R-channel Volume Control
0	0	0	0	0	1	1	0	Both channels Volume Control
0	0	0	0	0	1	1	1	Power management

Soft-step time / ON / OFF (0H)

MSB							LSB	Function
D7	D6	D5	D4	D3	D2	D1	D0	
1					0	0	0	Soft-step Time
1					0	0	1	0.64ms
1					0	1	0	1.28ms
1					0	1	1	2.56ms
1					1	0	0	5.12ms
1					1	0	1	10.24ms
1					1	1	0	20.48ms
1					1	1	1	40.96ms
1					1	1	1	81.92ms
1				0				Soft-step
1				1				On
								Off

The initial condition is Soft-step Off, Soft-step time 40.96ms.

Input Gain Control (01H , 02H , 03H)

MSB							LSB	Function
D7	D6	D5	D4	D3	D2	D1	D0	Gain
		1	1	0	0	0	0	0dB
		1	1	0	0	0	1	1dB
		1	1	0	0	1	0	2dB
		1	1	0	0	1	1	3dB
		1	1	0	1	0	0	4dB
		1	1	0	1	0	1	5dB
		1	1	0	1	1	0	6dB
		1	1	0	1	1	1	7dB
		1	1	1	0	0	0	8dB
		1	1	1	0	0	1	9dB
		1	1	1	0	1	0	10dB
		1	1	1	0	1	1	11dB
		1	1	1	1	0	0	12dB
		1	1	1	1	0	1	13dB
		1	1	1	1	1	0	14dB
		1	1	1	1	1	1	15dB

The initial condition 14dB. We suggest the gain is set as the power is up. For example, set and fix the gain +10dB, the volume range will be controlled from -69dB to +25dB.

Volume Control (04H , 05H , 06H)

MSB							LSB	Function
D7	D6	D5	D4	D3	D2	D1	D0	
	0	0	0	1	1	1	1	+ 15dB
	0	0	0	1	1	1	0	+ 14dB
	:	:	:	:	:	:	:	:
	0	0	0	0	0	0	0	0dB
	0	0	1	0	0	0	0	0dB
	0	0	1	0	0	0	1	− 1dB
	:	:	:	:	:	:	:	:
	0	0	1	1	1	1	1	− 15dB
	0	1	0	0	0	0	0	− 16dB
	:	:	:	:	:	:	:	:
	0	1	0	1	1	1	1	− 31dB
	0	1	1	0	0	0	0	− 32dB
	:	:	:	:	:	:	:	:
	0	1	1	1	1	1	1	− 47dB
	1	0	0	0	0	0	0	− 48dB
	:	:	:	:	:	:	:	:
	1	0	0	1	1	1	1	− 63dB
	1	0	1	0	0	0	0	− 64dB
	:	:	:	:	:	:	:	:
	1	0	1	1	1	1	1	− 79dB
	1	1	X	X	X	X	X	Mute

The initial condition is Mute.


Power management (07H)

MSB							LSB	Function
D7	D6	D5	D4	D3	D2	D1	D0	
							0	Release of V_{REF} to GND.
							1	Set the voltage of V_{REF} to $V_{DD}/2$.
					0	X		All devices Active
					1	1		Power down


The initial condition is Power down , $V_{REF} = GND$.

Example


Soft-step Time 10.24ms , Soft-step ON

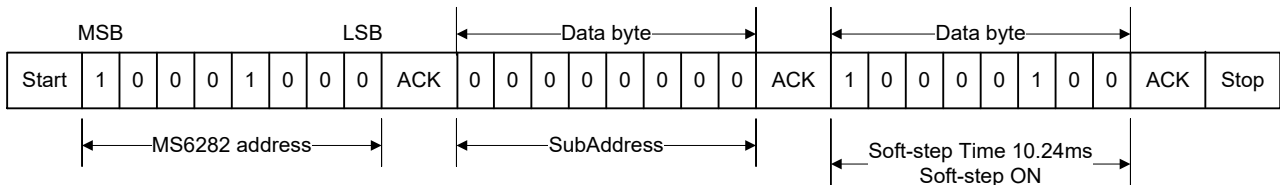


Set the $1/2V_{DD}$, All device active.

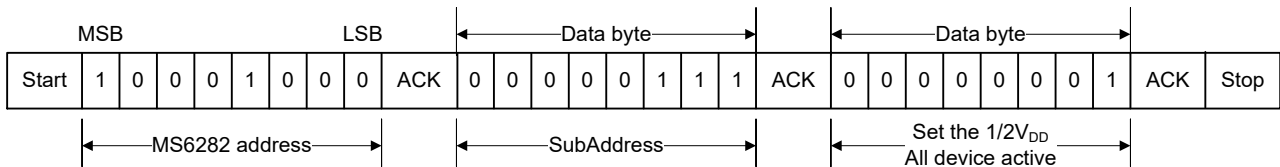

Set Input gain of both channels at +4dB

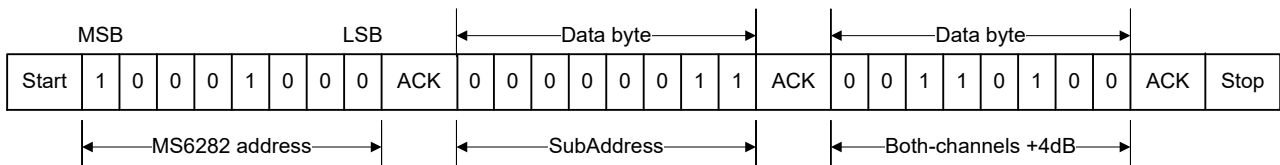

Set Volume of both-channels at -15dB

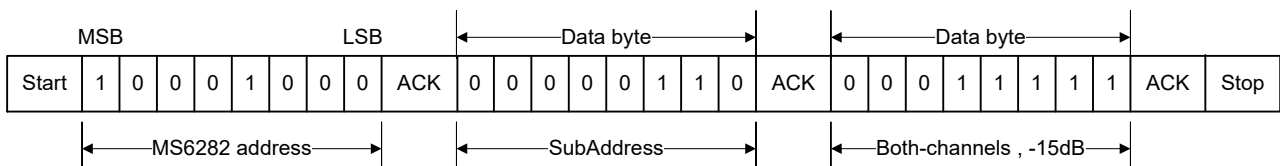

Soft-step volume


When the volume-level is changed audible clicks could appear at the output. The root cause of those clicks could be the sudden change of the envelope of the audio signal. With the Soft-step feature, this click could be reduced to a minimum. Soft-step supports N dB volume change, including mute.

Example


Soft-Step Time = 5.12ms

0dB → -16dB → 0dB

$V_{in} = 1V_{rms} @ 1KHz$

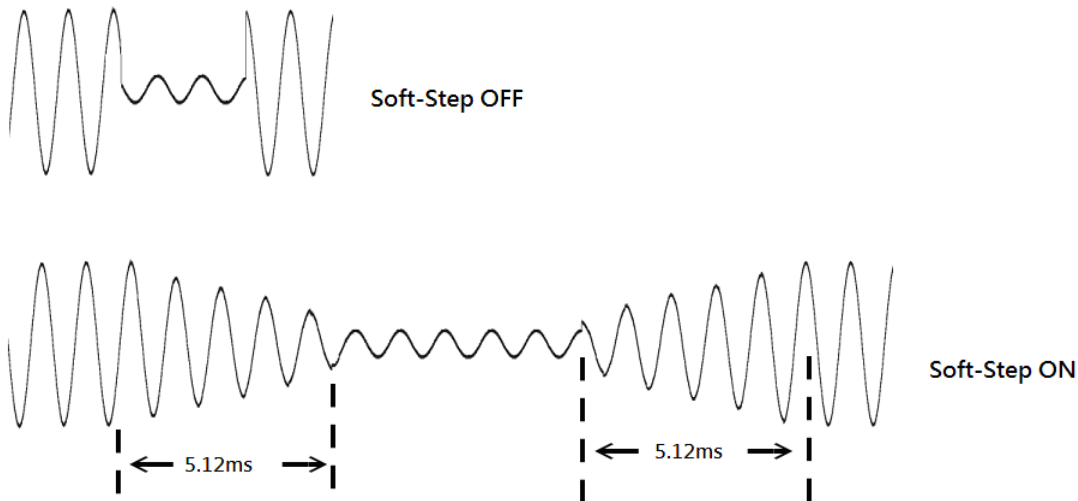


$V_{in} = 1V_{rms} @ 2KHz$

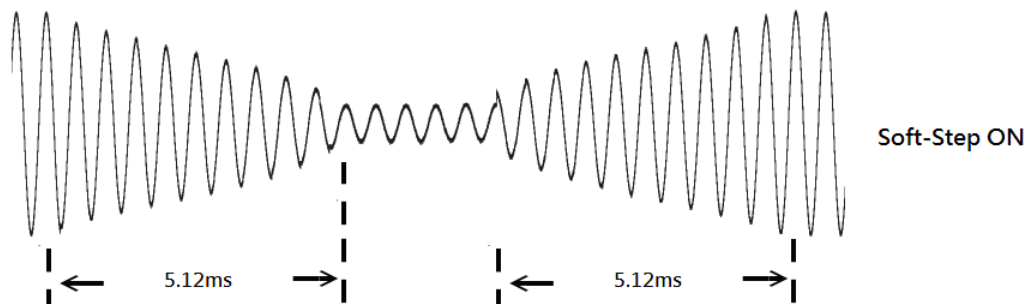


+8dB → -16dB → +8dB

$V_{in} = 0.5V_{rms} @ 1KHz$

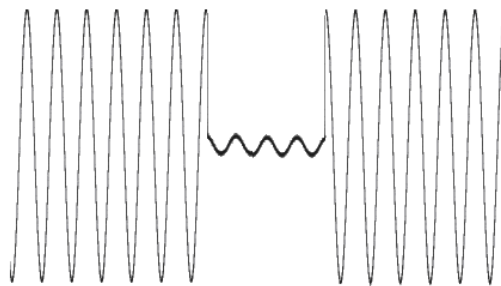


Soft-Step OFF

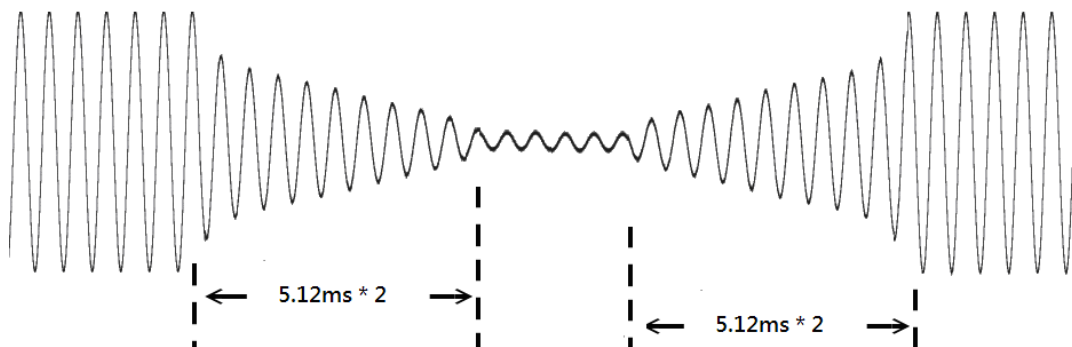


Soft-Step ON

0dB → Mute → 0dB

$V_{in} = 1V_{rms} @ 1KHz$

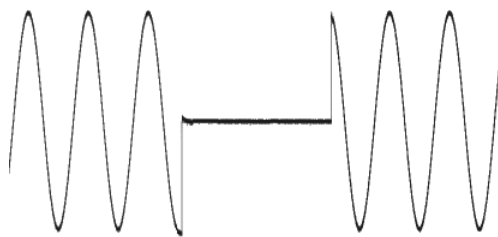


Soft-Step OFF

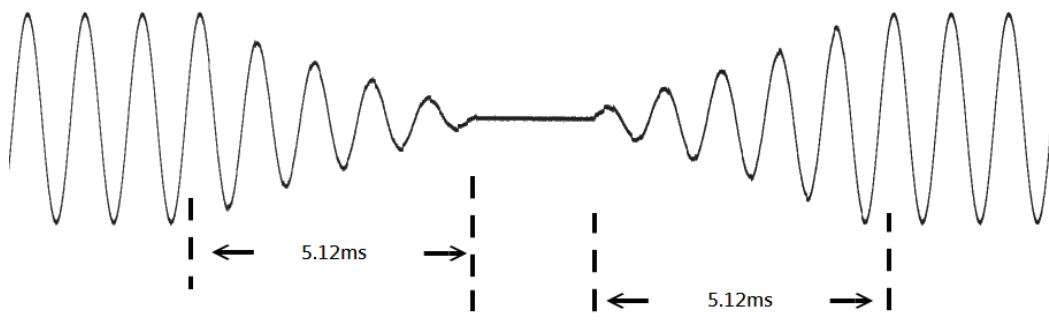


Soft-Step ON

APPLICATION INFORMATION

Basic application example

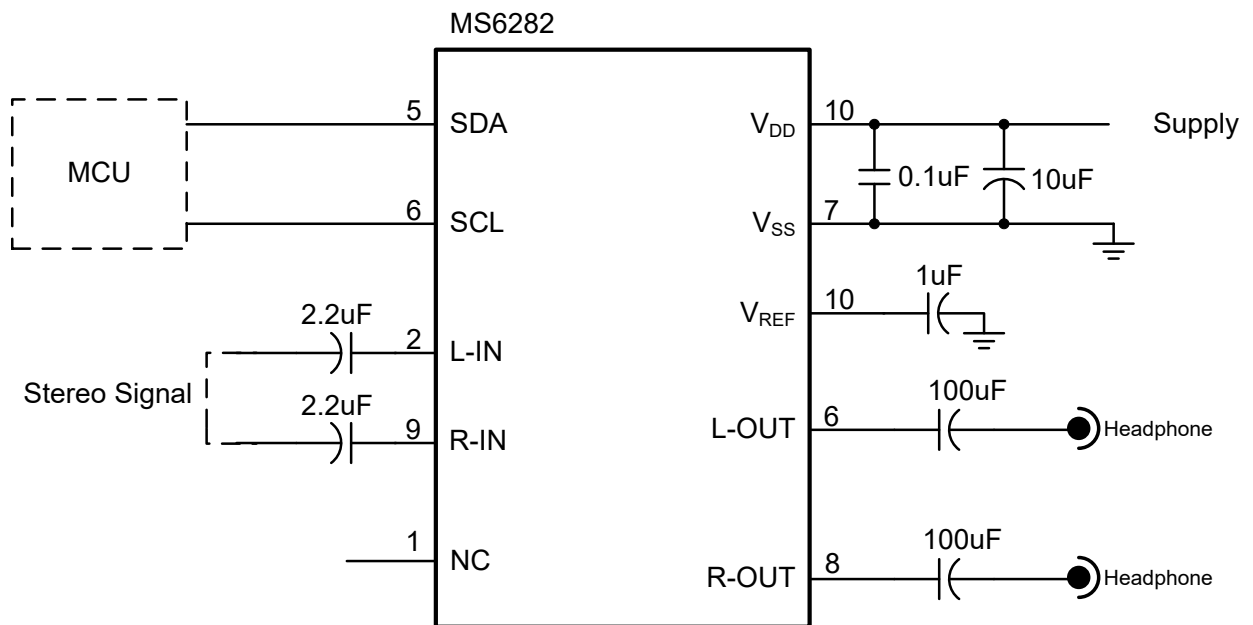

Basic application flowchart

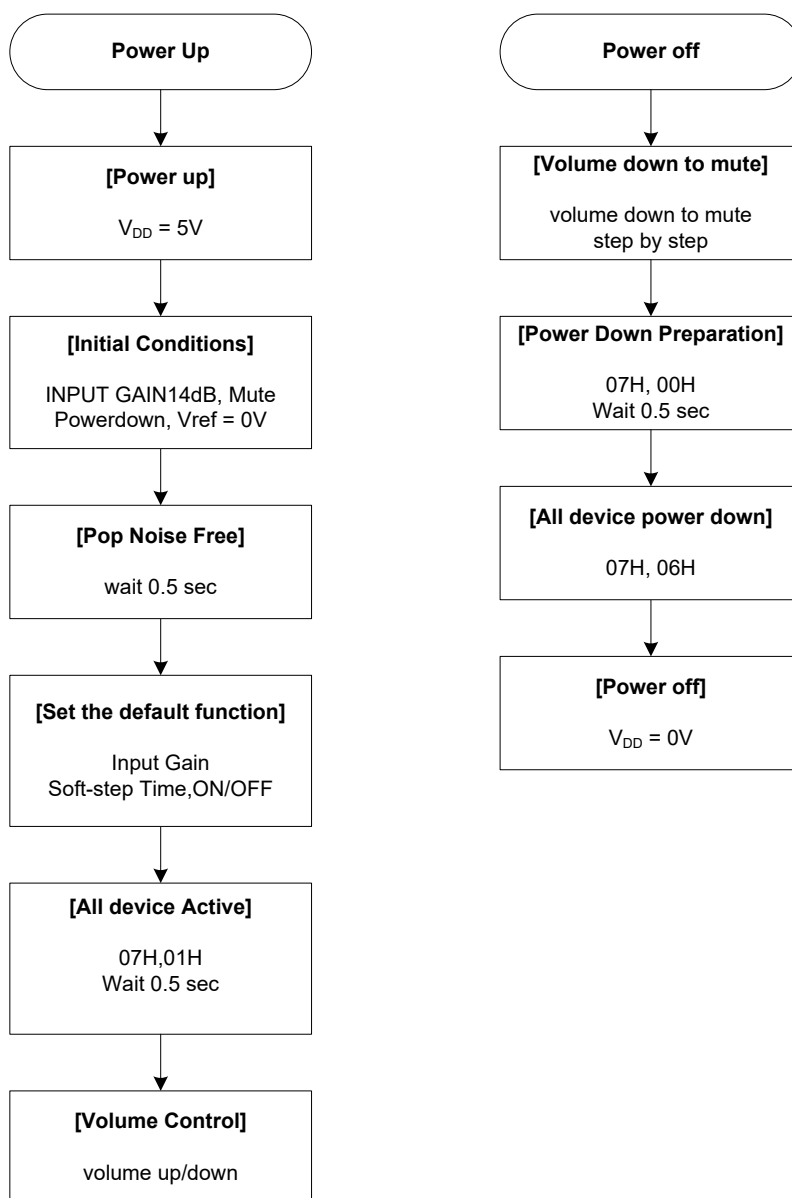

MSOP10 package

