


**MSC4000**

**RF AND MICROWAVE TRANSISTORS  
GENERAL PURPOSE AMPLIFIER APPLICATIONS**


**Features**

- 3:1 VSWR AT RATED CONDITIONS
- HERMETIC STRIPAC® PACKAGE
- P<sub>OUT</sub> = 0.5 W MIN. WITH 5.0 dB GAIN AT 4.0 GHz

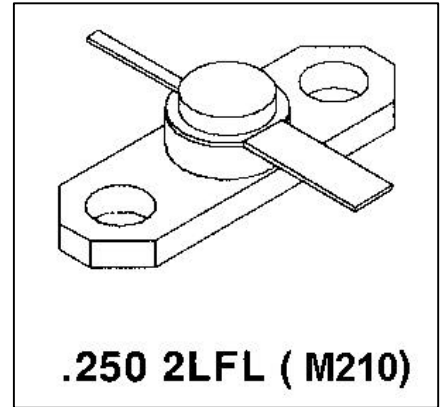

**DESCRIPTION:**

The MSC4000 common-base, hermetically sealed silicon NPN microwave power transistor features a unique Microgrid™ structure and can withstand 3:1 VSWR at any phase angle under rated conditions. It is designed for Class C amplifier applications in the 2.0 – 4.4 GHz frequency range.

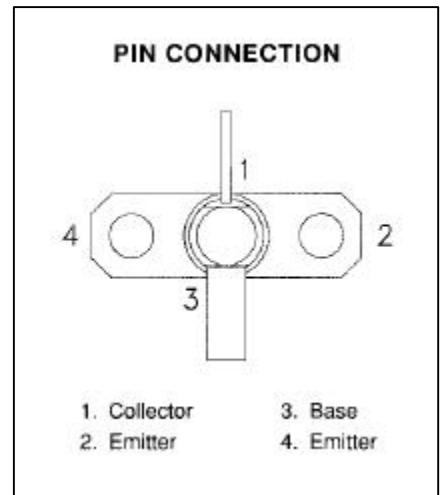

**ABSOLUTE MAXIMUM RATINGS (T<sub>CASE</sub> = 25°C)**

Symbol	Parameter	Value	Unit
P <sub>DISS</sub>	Power Dissipation*	3.89	W
I <sub>C</sub>	Device Current*	0.15	A
V <sub>CC</sub>	Collector Supply Voltage*	30	V
T <sub>J</sub>	Junction Temperature (Pulsed RF Operation)	+200	°C
T <sub>STG</sub>	Storage Temperature	-65 to +200	°C

**THERMAL DATA**

R <sub>TH(j-c)</sub>	Junction-Case Thermal Resistance*	45	°C/W
----------------------	-----------------------------------	----	------

\*Applies only to rated RF amplifier operation

**ELECTRICAL SPECIFICATIONS ( $T_{CASE} = 25^{\circ}C$ )**
**STATIC**

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
$BV_{CBO}$	$I_C = 1\text{ mA}$	$I_E = 0\text{ mA}$		45	---	---	V
$BV_{EBO}$	$I_E = 1\text{ mA}$	$I_C = 0\text{ mA}$		3.5	---	---	V
$BV_{CER}$	$I_C = 5\text{ mA}$	$R_{BE} = 10\ \Omega$		45	---	---	V
$I_{CBO}$	$V_{BE} = 28\text{ V}$			---	---	0.5	mA
$h_{FE}$	$V_{CE} = 5\text{ V}$	$I_C = 100\text{ mA}$		15	---	120	---

**DYNAMIC**

Symbol	Test Conditions			Value			Unit
				Min.	Typ.	Max.	
$P_{OUT}$	$f = 4.0\text{ GHz}$	$P_{IN} = 0.16\text{ W}$	$V_{CC} = 28\text{ V}$	0.5	0.6	---	W
$\eta_C$	$f = 4.0\text{ GHz}$	$P_{IN} = 0.16\text{ W}$	$V_{CC} = 28\text{ V}$	25	27	---	%
$G_P$	$f = 4.0\text{ GHz}$	$P_{IN} = 0.16\text{ W}$	$V_{CC} = 28\text{ V}$	5.0	5.8	---	dB
$C_{OB}$	$f = 1\text{ MHz}$	$V_{CB} = 28\text{ V}$		---	---	2.5	pF


**MSC4000**

**IMPEDANCE DATA**


Freq.	Z <sub>IN</sub> (Ω)	Z <sub>CL</sub> (Ω)
2.0 GHz	60.0 – j 85.0	6.0 + j 22.0
2.3 GHz	42.0 – j 60.0	4.5 + j 18.0
3.0 GHz	24.0 – j 17.5	2.0 + j 5.5
3.5 GHz	24.0 + j 42.0	2.0 + j 1.3
4.0 GHz	33.0 + j 90.0	2.0 – j 10.0
4.4 GHz	50.0 + j 150.0	5.0 – j 17.5

**TEST CIRCUIT**

Ref.: Dwg. No. C125504B

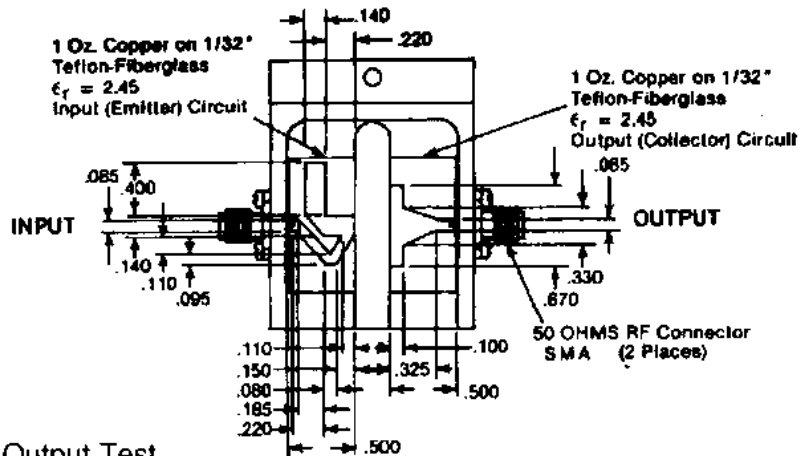


**RF Amplifier Power Output Test**

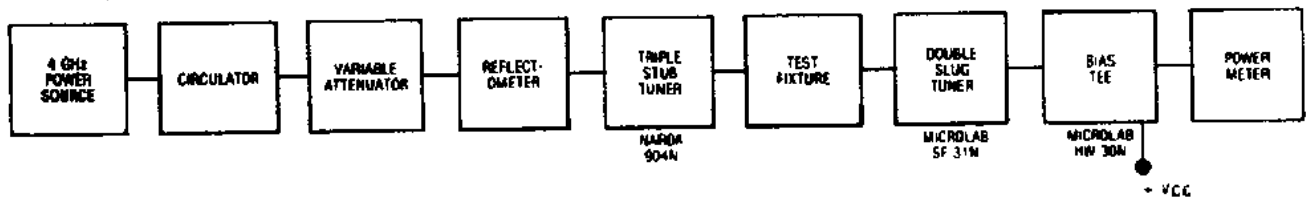

All dimensions are in inches.

**PACKAGE MECHANICAL DATA**

**PACKAGE STYLE M210**

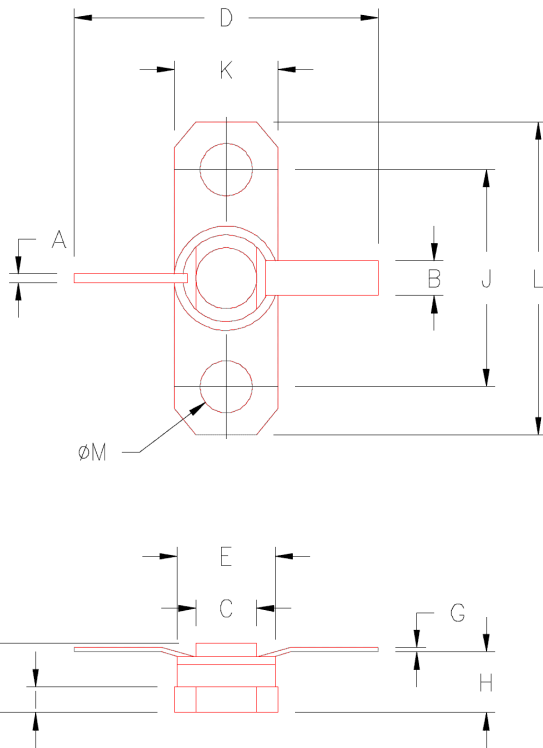

INCHES/MM			
.028/0,71			
.110/2,80	K	.245/6,22	.255/6,48
.165/4,19	L	.790/20,07	.810/20,57
.740/18,80	M	.128/3,25	.132/3,35
.225/5,72			
.149/2,30			
.003/0,08			
.117/2,97			
.058/1,47			