

FEATURES

- ▶ Industrial SMD Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ No Min. Load Requirement
- ▶ Overload and Short Circuit Protection
- ▶ Remote On/Off Function
- ▶ Water-washable Process Available(option)
- ▶ Qualified for Lead-free Reflow Solder Process
According to IPC/JEDEC J-STD-020D.1
- ▶ Tape & Reel Package Available
- ▶ UL/cUL/IEC/EN 62368-1(60950-1) Safety Approval



PRODUCT OVERVIEW

The MSCW01 series is a family of compact 1W DC-DC-converters with wide 2:1 input voltage ranges and tightly regulated output voltages.

They work with high efficiency over the full load range and come with a remote On/Off control input.

High efficiency to 82% allows operating temperatures up to +75°C without power derating. The very small footprint of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and many other battery operated applications.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current			Max. capacitive Load	Reflected Ripple current	Efficiency (typ.)
			Max.	@Max. Load	@No Load			
	VDC	VDC	mA	mA(typ.)	mA(typ.)	μF	mA (typ.)	%
MSCW01-05S05	5 (4.5 ~ 9)	5	200	256	40	1680	80	78
MSCW01-05S12		12	83	252		820		79
MSCW01-05S15		15	67	248		680		81
MSCW01-05D12		±12	±42	255		470#		79
MSCW01-05D15		±15	±33	248		330#		80
MSCW01-12S05	12 (9 ~ 18)	5	200	105	20	1680	40	79
MSCW01-12S12		12	83	105		820		79
MSCW01-12S15		15	67	102		680		82
MSCW01-12D12		±12	±42	104		470#		81
MSCW01-12D15		±15	±33	103		330#		80
MSCW01-24S05	24 (18 ~ 36)	5	200	53	10	1680	30	79
MSCW01-24S12		12	83	51		820		82
MSCW01-24S15		15	67	51		680		82
MSCW01-24D12		±12	±42	51		470#		82
MSCW01-24D15		±15	±33	50		330#		82
MSCW01-48S05	48 (36 ~ 75)	5	200	26	7	1680	20	79
MSCW01-48S12		12	83	26		820		80
MSCW01-48S15		15	67	26		680		80
MSCW01-48D12		±12	±42	26		470#		81
MSCW01-48D15		±15	±33	25		330#		81

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	15	VDC
	12V Input Models	-0.7	---	25	
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	5V Input Models	---	---	4.5	
	12V Input Models	---	---	9	
	24V Input Models	---	---	18	
	48V Input Models	---	---	36	
Input Filter	All Models	Internal Capacitor			

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	Under 0.6 VDC or Open Circuit				
Converter Off	Needs to add an external Re: 1k Ω	3	---	15	VDC
Standby Input Current	Nominal Vin	---	---	3	mA

Output Specifications


Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	± 1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	---	± 1.0	%
Line Regulation	Vin=Min. to Max. @Full Load	---	---	± 0.2	%
Load Regulation	Min. Load to Full Load	Single Output	---	± 1.0	%
		Dual Output	---	± 1.0	%
	Io=10% to 90%	Single Output	---	± 0.5	%
		Dual Output	---	± 0.8	%
Minimum Load	No minimum Load Requirement				
Ripple & Noise	0-20 MHz Bandwidth	---	---	75	mV _{P-P}
Transient Recovery Time	25% Load Step Change	---	250	---	μ sec
Transient Response Deviation		---	± 3	± 5	%
Temperature Coefficient		---	---	± 0.02	%/
Short Circuit Protection	Continuous, Automatic Recovery				

General Specifications



Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	M Ω
I/O Isolation Capacitance	100kHz, 1V	---	---	50	pF
Switching Frequency		---	220	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,800,000			Hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2			
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-report)				
	UL/cUL 62368-1 recognition(UL certificate), IEC/EN 62368-1(CB-report)				

Environmental Specifications

Parameter	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	-40	+85	°C
Case Temperature	---	+95	°C
Storage Temperature	-55	+125	°C
Humidity (non condensing)	---	95	% rel. H
Lead-free Reflow Solder Process	IPC/JEDEC J-STD-020D.1		

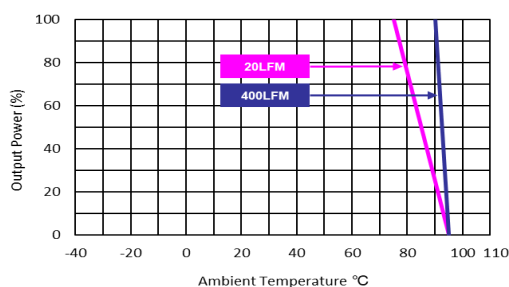Power Derating Curve

Notes

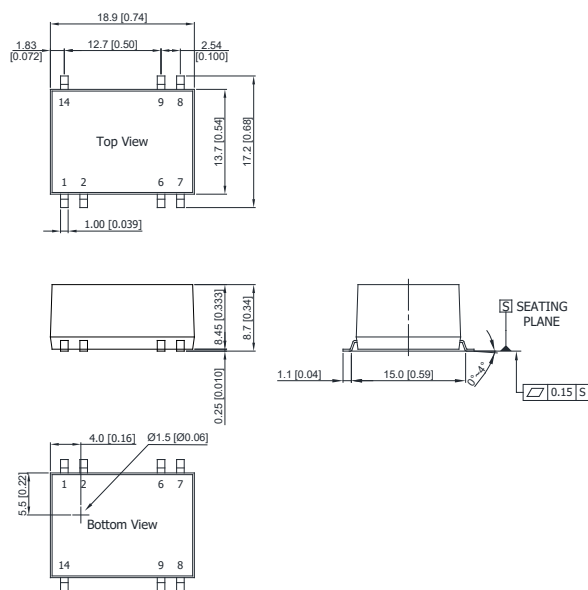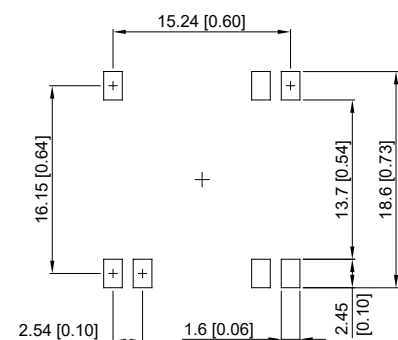- 1 Specifications typical at $T_a = +25^\circ\text{C}$, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 3 Other input and output voltage may be available, please contact MINMAX.
- 4 Specifications are subject to change without notice.
- 5 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

Package Specifications
Mechanical Dimensions

Connecting Pin Patterns


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05 (±0.002)

Pin Connections

Pin	Single Output	Dual Output
1	-Vin	-Vin
2	Remote On/Off	Remote On/Off
6	NC	Common
7	NC	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin	+Vin

NC: No Connection

Physical Characteristics

Case Size	: 18.9x13.7x8.45mm (0.74x0.54x0.33 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Phosphor Bronze
Weight	: 2.9g

Order Code Table


Standard	For water-washable process
MSCW01-05S05	MSCW01-05S05-W
MSCW01-05S12	MSCW01-05S12-W
MSCW01-05S15	MSCW01-05S15-W
MSCW01-05D12	MSCW01-05D12-W
MSCW01-05D15	MSCW01-05D15-W
MSCW01-12S05	MSCW01-12S05-W
MSCW01-12S12	MSCW01-12S12-W
MSCW01-12S15	MSCW01-12S15-W
MSCW01-12D12	MSCW01-12D12-W
MSCW01-12D15	MSCW01-12D15-W
MSCW01-24S05	MSCW01-24S05-W
MSCW01-24S12	MSCW01-24S12-W
MSCW01-24S15	MSCW01-24S15-W
MSCW01-24D12	MSCW01-24D12-W
MSCW01-24D15	MSCW01-24D15-W
MSCW01-48S05	MSCW01-48S05-W
MSCW01-48S12	MSCW01-48S12-W
MSCW01-48S15	MSCW01-48S15-W
MSCW01-48D12	MSCW01-48D12-W
MSCW01-48D15	MSCW01-48D15-W

E-mail: sales@minmax.com.tw Tel: 886-6-2923150

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 kHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

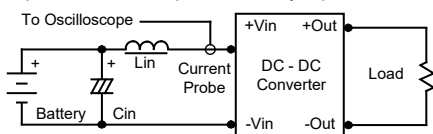

Peak-to-Peak Output Noise Measurement Test


Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

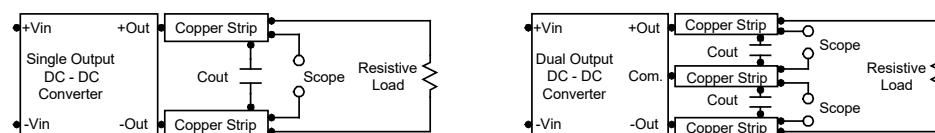

Technical Notes

Remote On/Off

Negative logic remote on/off turns the module off during a logic high voltage on the remote on/off pin, and on during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic high is 2-4mA current applied via 1Kohm resistor. A logic low is open circuit or high impedance.



Circuit diagram for current source based control


Circuit diagram for voltage level based control

Maximum Capacitive Load

The MSCW01 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is commended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 8.2 μ F for the 5V input device, a 3.3 μ F for the 12V input devices and a 1.5 μ F for the 24V and 48V devices.

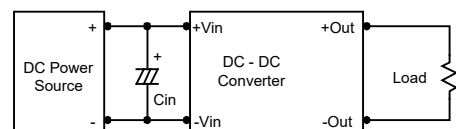

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.



Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95°C. The derating curves are determined from measurements obtained in a test setup.

