

X-Band Magnetron

MSF1425B is designed for the magnetron of x-band radar system. The frequency range is fixed <9380-9440MHz> and the peak output power is 6kW.

--- MAXIMUM RATINGS ---

	Min	Max	Unit
Peak anode current	3.0	7.0	A
Perk anode power input	-	50	kW
Duty cycle	-	0.001	-
Pulse duration	0.05	1.0	μs
Rate of rise of voltage pulse	-	90	kV/μs
Anode temperature	-	100	°C
V.S.W.R at the output coupler	-	1.5:1	-

--- ELECTRICAL ---

	Min	Typical	Max	Unit
Heater voltage (Note 1)	5.7	6.3	6.9	V
Preheat time	60	-	-	S
Peak anode voltage (Note 2)	5.4	5.6	6.0	kV
Peak output power (Note 2)	10	10.5	-	kW
Frequency (Note 2)	9380	9410	9440	MHz


Note 1: Measured with heater voltage of 6.3V and no anode input power, the heater current limits are 0.5A minimum, 0.6A maximum. No reduction of heater voltage is required.

Note 2: Measured at peak anode current 5.0A

MSF 1425B

OUTLINE

Note: Dimensions are in mm

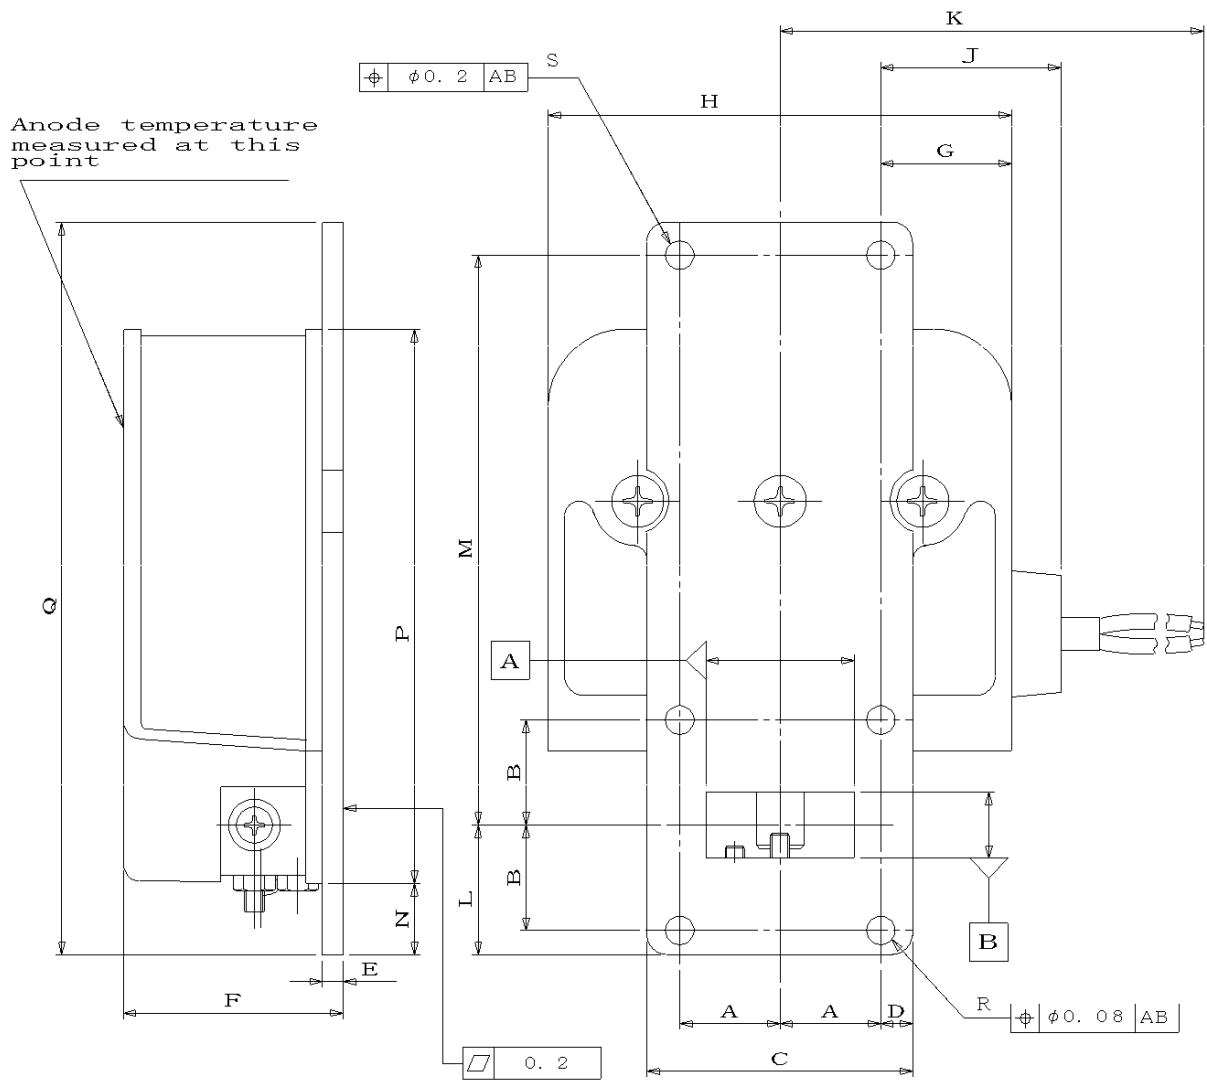

	MIN	MAX
A	15.5	
B	16.25	
C	40.8	41.2
D	4.8	5.2
E	2.7	3.7
F	-	36.0
G	-	21.5
H	-	74.0

	MIN	MAX
J	-	30.0
K	240	-
L	19.6	20.2
M	88	
N	10.0	-
P	-	86.0
Q	112.6	113.2
R	φ4.3	φ4.375
S	φ4.4	φ4.5

Lead Connections

Colour	Element
Green	Heater
Yellow	Heater. Cathode