

MT3560A-UHR2

Features

High Reliability
Wide Beam Angle

Applications

Optical Sensors
Indicator


Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Test Condition	Unit
Forward Current	I _F	50	—	mA
Pulsed Forward Current	I _{FP}	.50	tw=10μS, T=10mS	A
Reverse Voltage	V _R	5	—	V
Power Dissipation	P _D	130.00	—	mW
Operating Temperature	T _{opr}	-20 ~ +80	—	°C
Storage Temperature	T _{stg}	-30 ~ +100	—	°C
Junction Temperature	T _j	100	—	°C
Soldering Temperature	T _{sol}	260	for 5 sec. max	°C


Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =20mA	—	2.00	2.80	V
Reverse Current	I _R	V _R =5V	—	—	100	μA
Power Output	PO	I _F =20mA	6.00	8.00	—	mW
Half Intensity Beam Angle	θ	—	—	± 40°	—	deg.
Peak Wavelength	λ _p	I _F =20mA	—	640	—	nm
Spectral Line Half Width	Δλ	I _F =20mA	—	20	—	nm

All Specifications are subject to change without notice

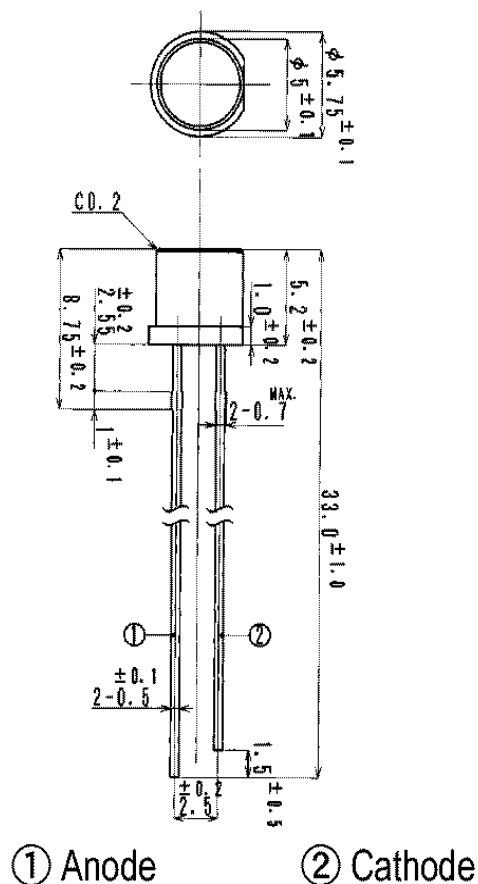

MT3560A-UHR2 Graphs

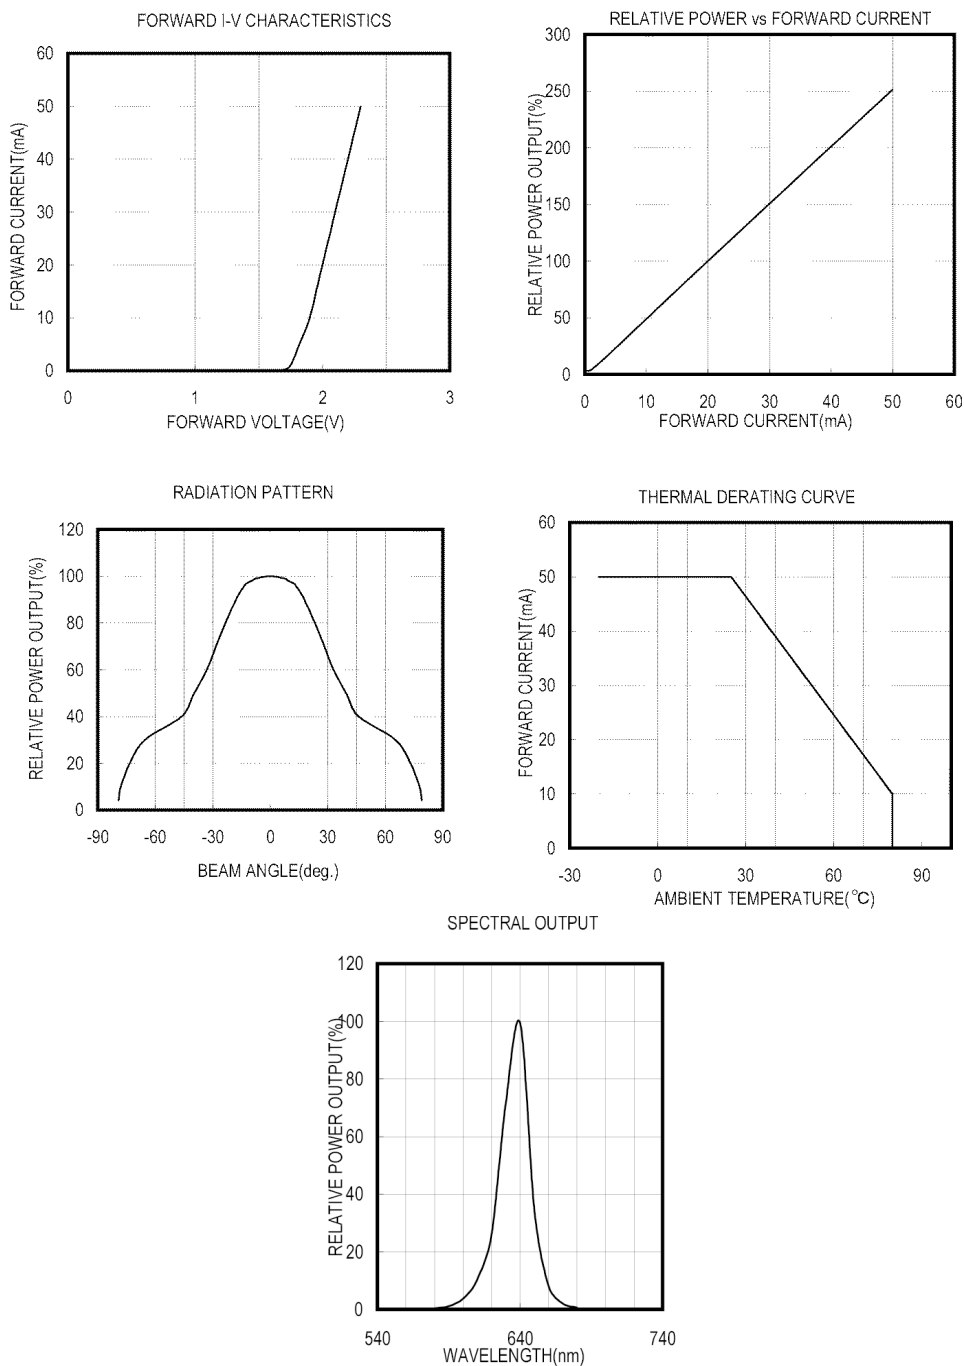

All Specifications are subject to change without notice

Company Headquarters
 3 Northway Lane North
 Latham, New York 12110
 Toll Free: 800.984.5337
 Fax: 518.785.4725