

ESD protected Dual N-CHANNEL MOSFET


MTDK5S6R

BV _{DSS}	30V
I _D	100mA
R _{DS(on)(MAX)}	8Ω


Description

- Low voltage drive(2.5V drive) makes this device ideal for portable equipment.
- The MOSFET elements are independent, eliminating mutual interference.
- Mounting cost and area can be cut in half.
- High speed switching
- ESD protected device
- Pb-free lead plating & halogen-free package

Symbol

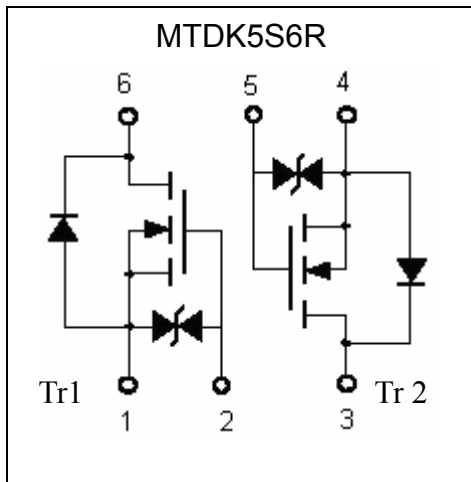

Outline

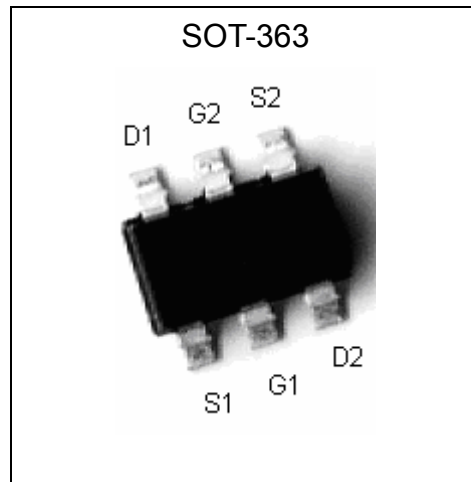

The following characteristics apply to both Tr1 and Tr2

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage	BV _{DSS}	30	V
Gate-Source Voltage	V _{GS}	±20	V
Continuous Drain Current	I _D	±100	mA
Pulsed Drain Current (Ta=25°C)	I _{DM}	±400 *1	mA
Total Power Dissipation	P _D	150 *2	mW
ESD susceptibility		750 *3	V
Operating Junction and Storage Temperature Range	T _j ; T _{stg}	-55~+150	°C
Thermal Resistance, Junction-to-Ambient	R _{th,ja}	833	°C/W

- Note : *1. Pulse Width ≤ 10μs, Duty cycle ≤ 1%
 *2. With each pin mounted on the recommended lands.
 *3. Human body model, 1.5kΩ in series with 100pF



Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Channel-to-ambient, max	*R _{th,ch-a}	833 (total)	°C/W
		1042 (per element)	

Note : With each pin mounted on the recommended lands.

Electrical Characteristics (Ta=25°C)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
B _V DSS	30	-	-	V	V _{GS} =0, I _D =100μA
V _{GS(th)}	0.8	1.3	1.5	V	V _{DS} =3V, I _D =100μA
I _{GSS}	-	-	±1	μA	V _{GS} =±20V, V _{DS} =0
I _{DSS}	-	-	100	nA	V _{DS} =30V, V _{GS} =0
R _{DS(ON)}	-	3.4	8	Ω	V _{GS} =4V, I _D =10mA
	-	6.9	13		V _{GS} =2.5V, I _D =1mA
G _{FS}	20	50	-	mS	V _{DS} =3V, I _D =10mA
Dynamic					
C _{iss}	-	12.5	-	pF	V _{DS} =5V, V _{GS} =0, f=1MHz
C _{oss}	-	7.3	-		
C _{rss}	-	3.5	-		
t _{d(on)}	-	15	-	ns	V _{DD} ≐5V, I _D =10mA, V _{GS} =5V, R _L =500Ω, R _G =10Ω
t _r	-	35	-		
t _{d(off)}	-	75	-		
t _f	-	75	-		
Source-Drain Diode					
*V _{SD}	-	0.88	1.2	V	V _{GS} =0V, I _S =100mA

*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%


Ordering Information

Device	Package	Shipping	Marking
MTDK5S6R	SOT-363 (Pb-free lead plating & halogen-free package)	3000 pcs / Tape & Reel	K5




Typical Characteristics


Typical Output Characteristics

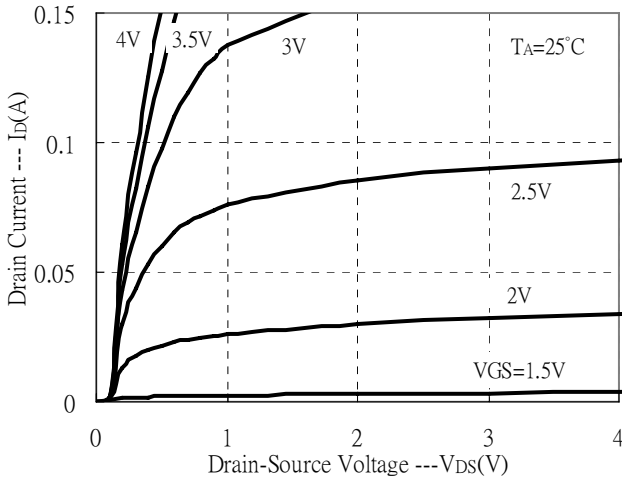


Gate Threshold Voltage vs Channel Temperature

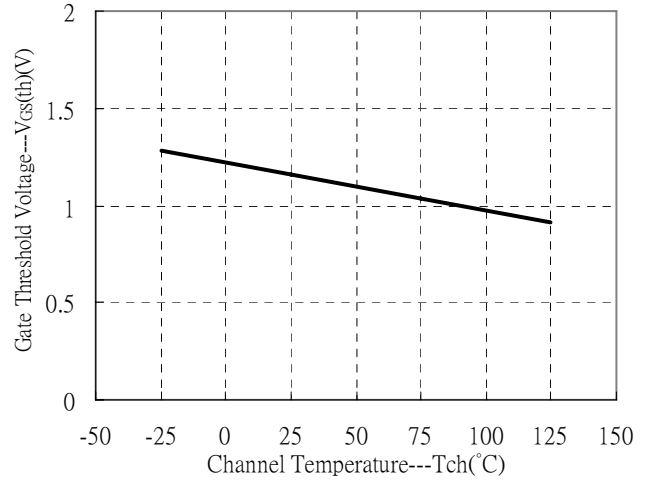


Typical Transfer Characteristics

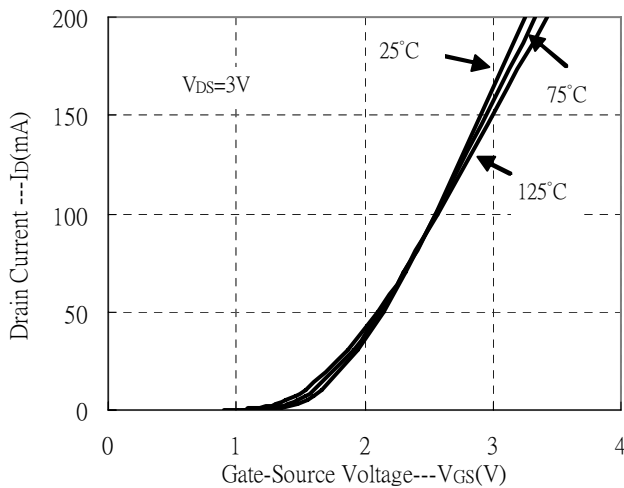


Static Drain-Source On-state Resistance with Temperature

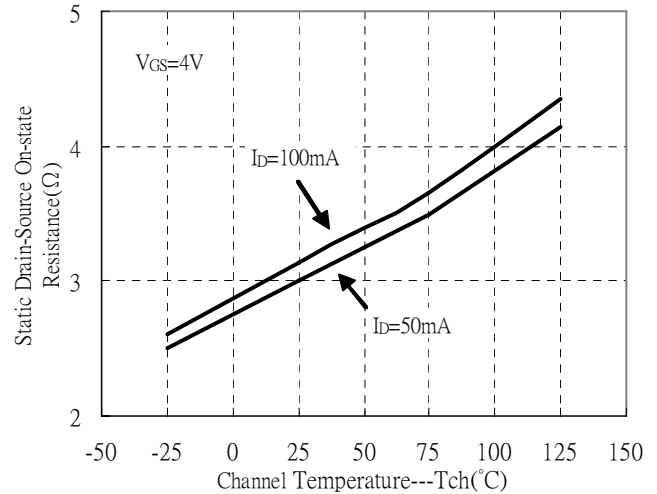

Static Drain-Source On-State resistance vs Drain Current

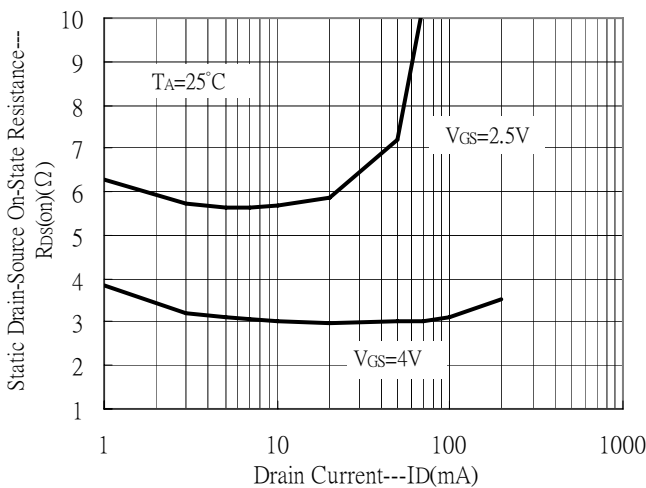


Static Drain-Source On-State resistance vs Drain Current

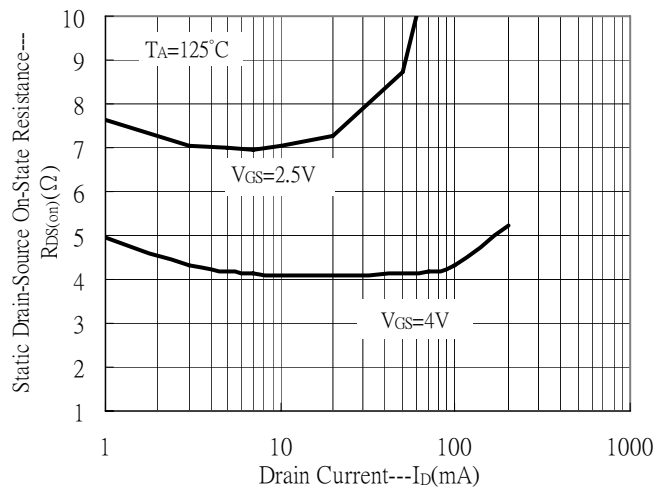


Typical Characteristics(Cont.)


Static Drain-Source On-State Resistance vs Drain Current

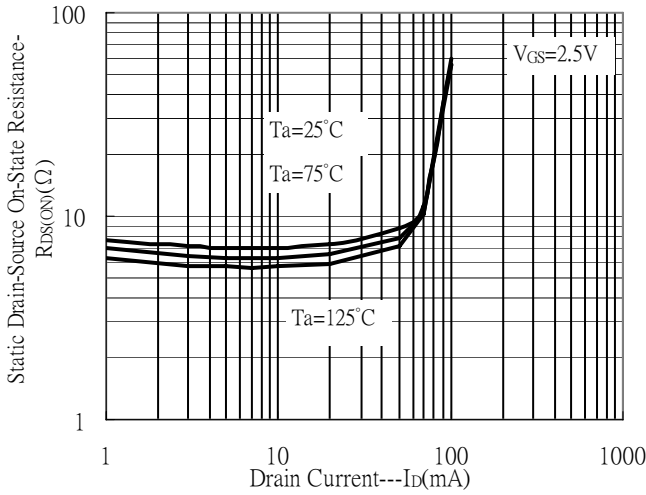


Static Drain-Source On-State Resistance vs Drain Current

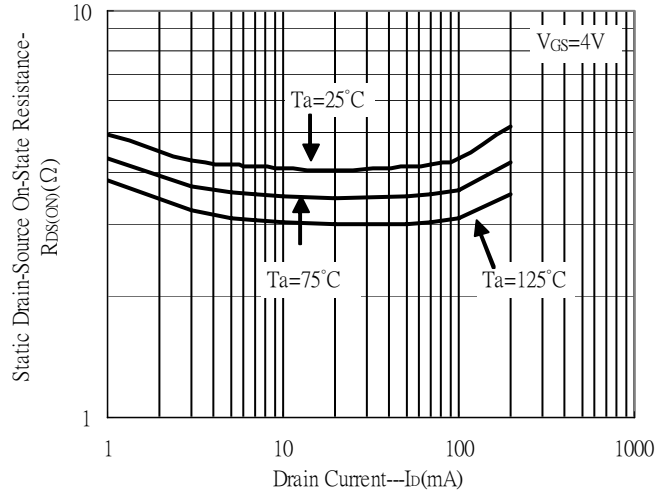


Static Drain-Source On-State Resistance vs Gate-Source Voltage

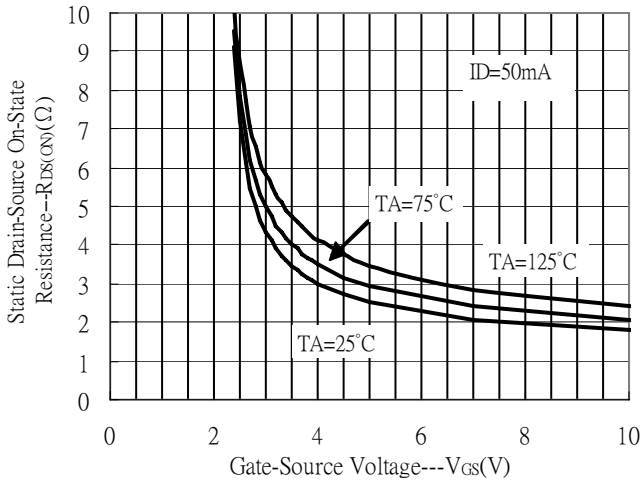


Static Drain-Source On-State Resistance vs Gate-Source Voltage

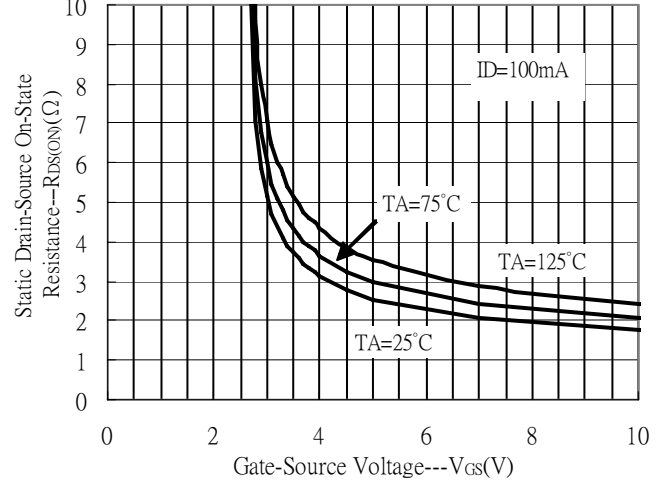

Reverse Drain Current vs Source-Drain Voltage(I)


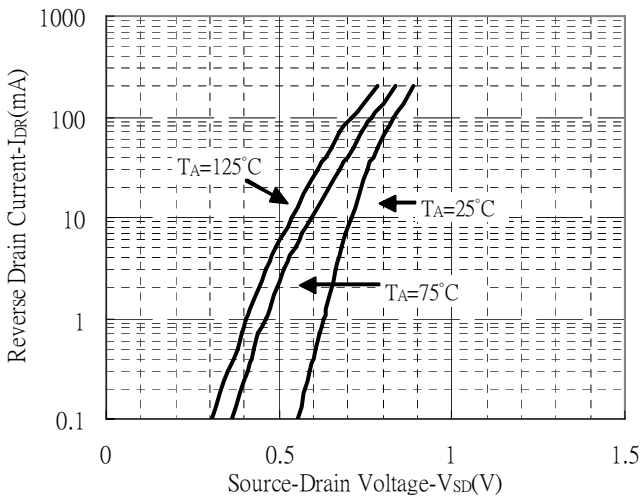


Reverse Drain Current vs Source-Drain Voltage(II)

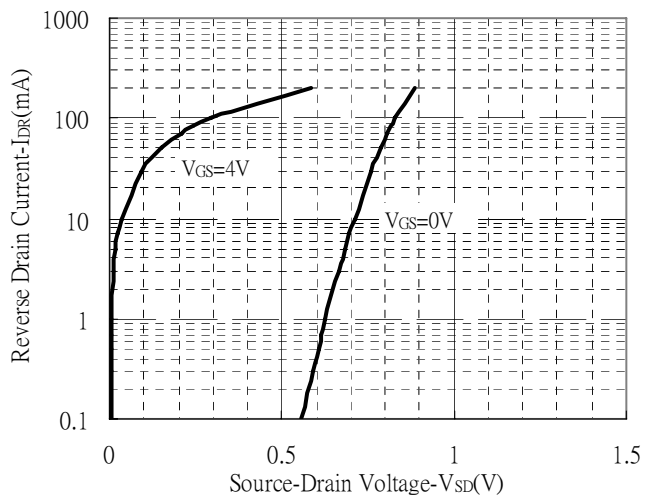





Typical Characteristics(Cont.)

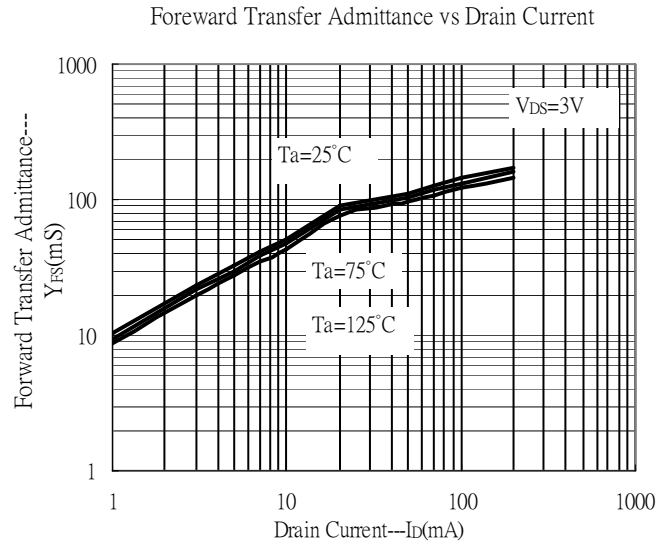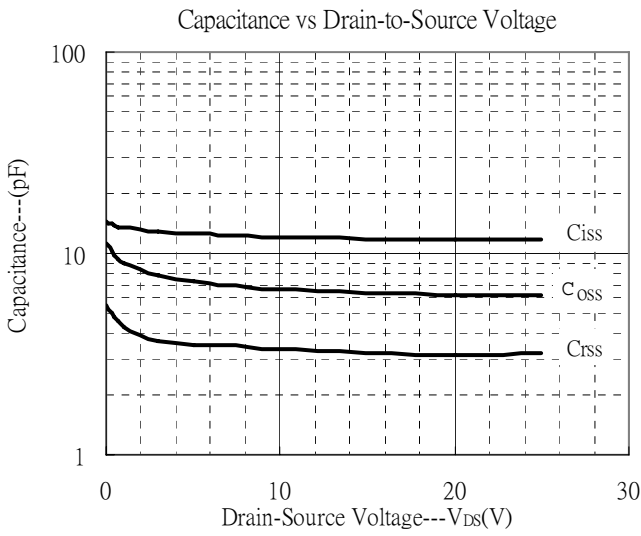

Reel Dimension

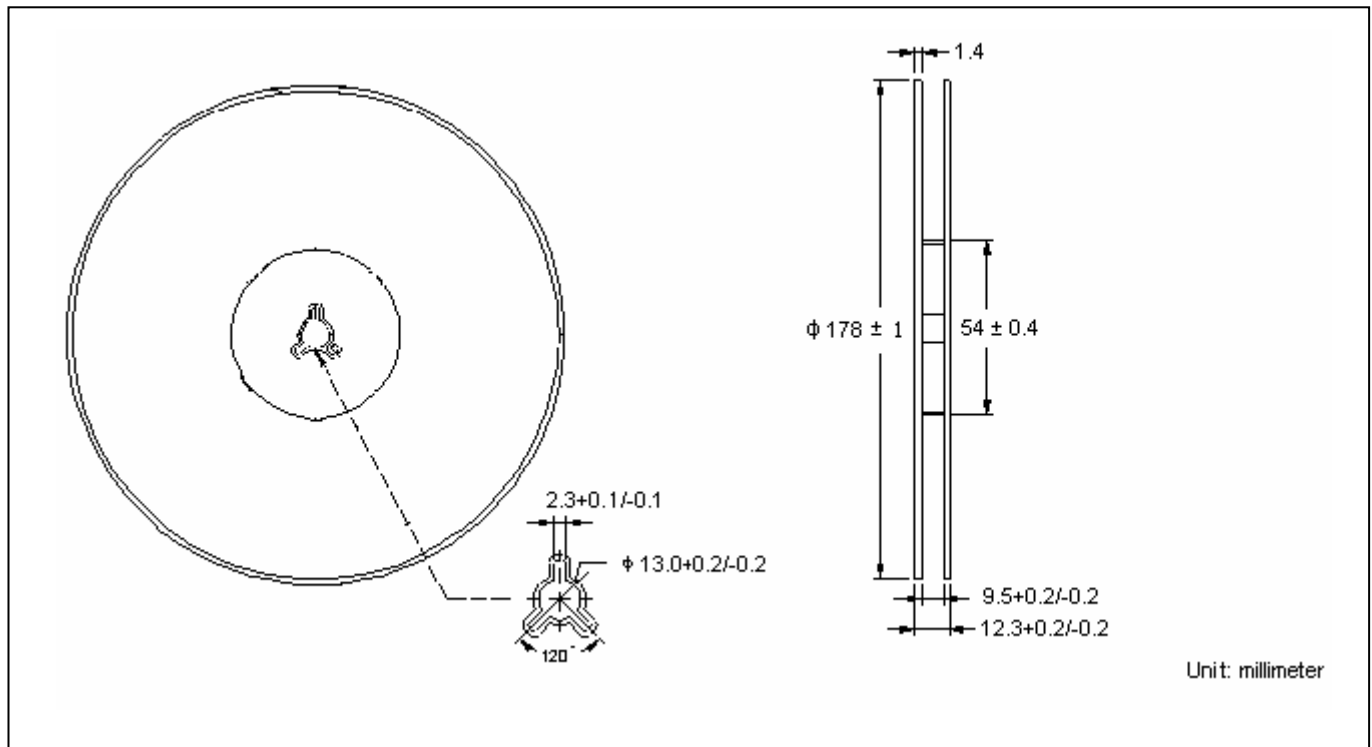


Carrier Tape Dimension

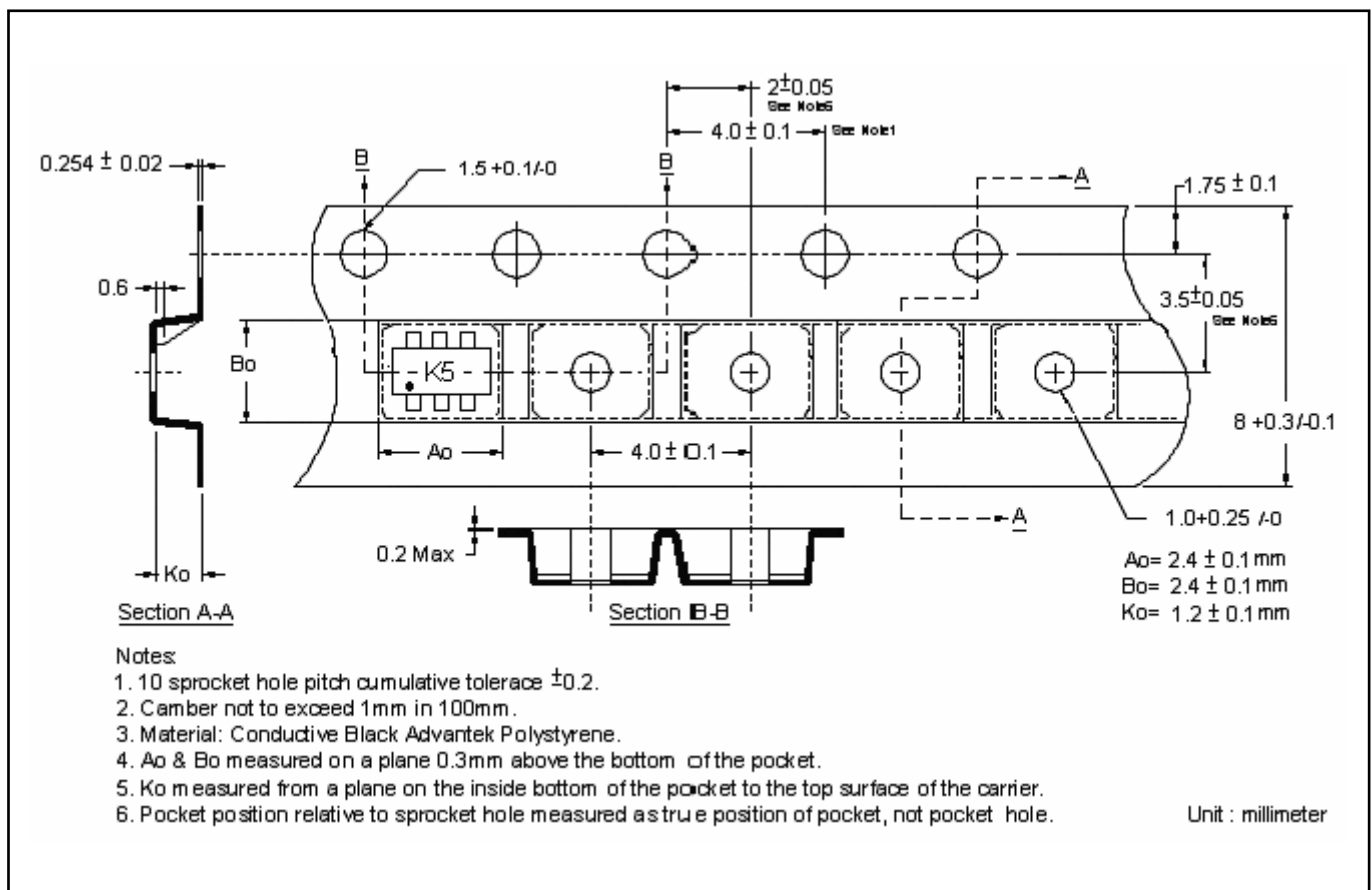

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

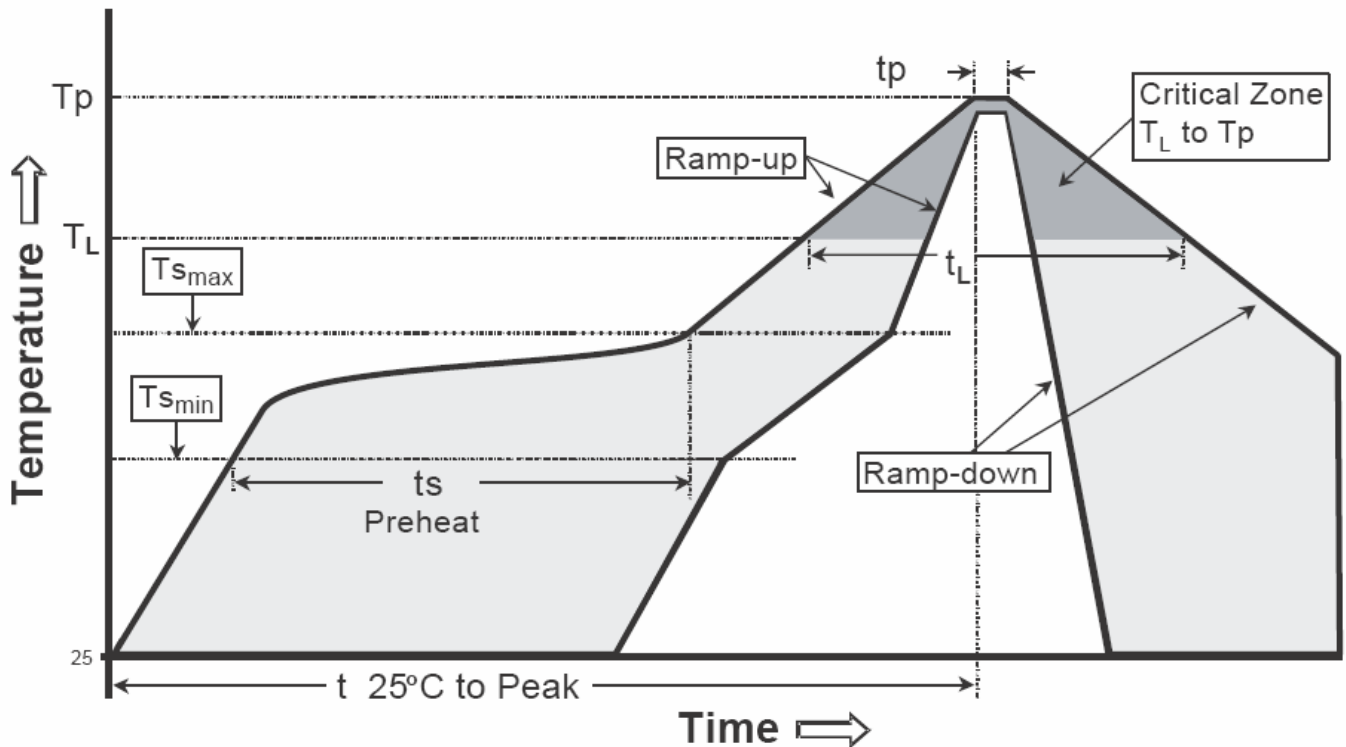

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T _{s min})	100°C	150°C
-Temperature Max(T _{s max})	150°C	200°C
-Time(t _{s min} to t _{s max})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183°C	217°C
- Time (t _L)	60-150 seconds	60-150 seconds
Peak Temperature(T _P)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

SOT-363 Dimension

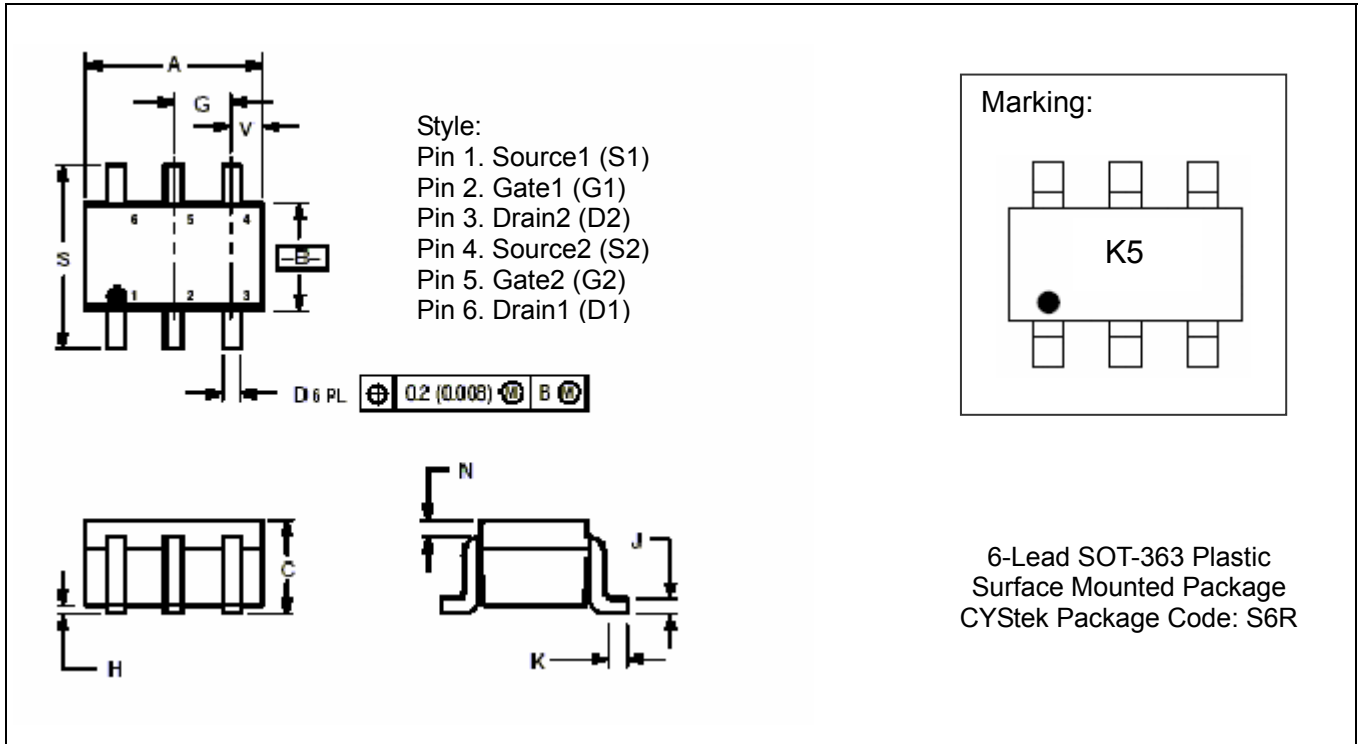

*:Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.071	0.087	1.8	2.2	J	0.004	0.010	0.1	0.25
B	0.045	0.053	1.15	1.35	K	0.004	0.012	0.1	0.30
C	0.031	0.043	0.8	1.1	N	0.008 REF		0.20 REF	
D	0.004	0.012	0.1	0.3	S	0.079	0.087	2.00	2.40
G	0.026BSC		0.65BSC		Y	0.012	0.016	0.30	0.40
H	-	0.004	-	0.1					

Notes : 1.Controlling dimension : millimeters.
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead : Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class:UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.