

20V Common Drain Dual N -Channel Enhancement Mode MOSFET

MTDN5820Z6

BV _{DSS}		20V
I _D	V _{GS} =4.5V	11A
R _{DS(on)} (TYP.)	V _{GS} =4.5V, I _D =5.5A	6.0mΩ
	V _{GS} =4.0V, I _D =5.5A	6.0mΩ
	V _{GS} =3.7V, I _D =5.5A	6.2 mΩ
	V _{GS} =3.1V, I _D =5.5A	6.7 mΩ
	V _{GS} =2.5V, I _D =5.5A	7.8 mΩ

Description


The MTDN5820Z6 consists of two N-channel enhancement-mode MOSFETs in a single TDFN2×5-6L package, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TDFN2×5-6L package is universally preferred for all commercial-industrial surface mount applications.


Features

- Simple drive requirement
- Low gate charge
- Low on-resistance
- Fast switching speed
- ESD protected
- Pb-free lead plating and halogen-free package

Equivalent Circuit

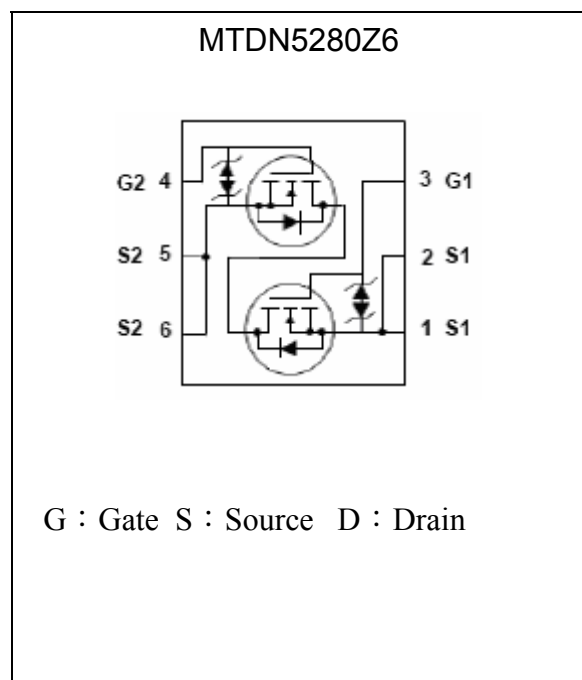

Outline

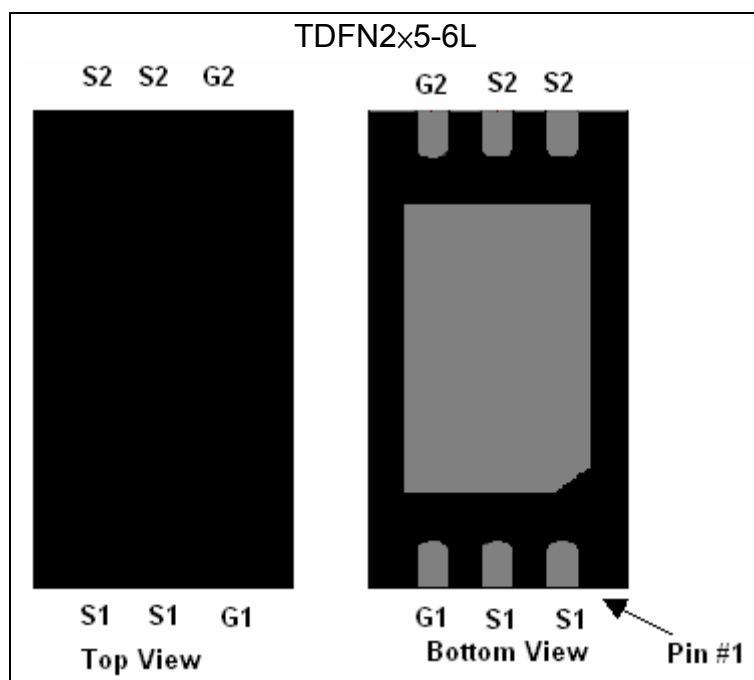

**Absolute Maximum Ratings** (Ta=25°C)

Parameter		Symbol	Limits	Unit
Drain-Source Breakdown Voltage		BV _{DSS}	20	V
Gate-Source Voltage		V _{GS}	±12	
Continuous Drain Current (Note 1)	T _A =25 °C, V _{GS} =4.5V	I _D	11	A
	T _A =70 °C, V _{GS} =4.5V		8.8	
Pulsed Drain Current (Note 2)		I _{DM}	90	
Total Power Dissipation (Note 1)	T _A =25 °C	P _D	1.7	W
	T _A =70 °C		1.0	
Operating Junction and Storage Temperature		T _j , T _{stg}	-55~+150	°C

Note : 1.Surface mounted on 1 in² copper pad of FR-4 board, t≤10 sec
2.Pulse width limited by maximum junction temperature

Thermal Data

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-ambient, max	R _{θJA}	75 (Note)	°C/W
Thermal Resistance, Junction-to-case, max	R _{θJC}	5.5	

Note : Surface mounted on 1 in² copper pad of FR-4 board, t≤10 sec; 145°C/W when mounted on minimum copper pad

Electrical Characteristics (T_j=25°C, unless otherwise specified)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	20	-	-	V	V _{GS} =0, I _D =250μA
ΔBV _{DSS} /ΔT _j	-	0.02	-	V/°C	Reference to 25°C, I _D =1mA
V _{GS(th)}	0.5	0.72	1.5	V	V _{DS} =V _{GS} , I _D =1mA
I _{GSS}	-	-	±10	μA	V _{GS} =±12V, V _{DS} =0
I _{DSS}	-	-	1		V _{DS} =18V, V _{GS} =0
	-	-	10		V _{DS} =16V, V _{GS} =0, T _j =70°C
*R _{DSON}	5.0	6.0	8.2	mΩ	I _D =5.5A, V _{GS} =4.5V
	5.2	6.0	8.5		I _D =5.5A, V _{GS} =4V
	5.4	6.2	9		I _D =5.5A, V _{GS} =3.7V
	5.8	6.7	9.4		I _D =5.5A, V _{GS} =3.1V
	6.0	7.8	11		I _D =5.5A, V _{GS} =2.5V
*G _{FS}	-	20	-	S	V _{DS} =5V, I _D =5.5A
Dynamic					
C _{iss}	-	1350	-	pF	V _{DS} =10V, V _{GS} =0, f=1MHz
C _{oss}	-	185	-		
C _{rss}	-	160	-		
*t _{d(ON)}	-	28	-	ns	V _{DS} =16V, I _D =5.5A, V _{GS} =4.5V, R _G =6Ω
*t _r	-	64	-		
*t _{d(OFF)}	-	60	-		
*t _f	-	55	-		




*Qg	-	15	-	nC	V _{DS} =16V, I _D =11A, V _{GS} =4.5V
*Qgs	-	2.8	-		
*Qgd	-	4.4	-		
Source-Drain Diode					
*V _{SD}	-	0.82	1.2	V	V _{GS} =0V, I _S =11A


*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

Ordering Information

Device	Package	Shipping
MTDN5820Z6-0-T9-G	TDFN2×5-6L (Pb-free lead plating and halogen-free package)	2500 pcs / Tape & Reel

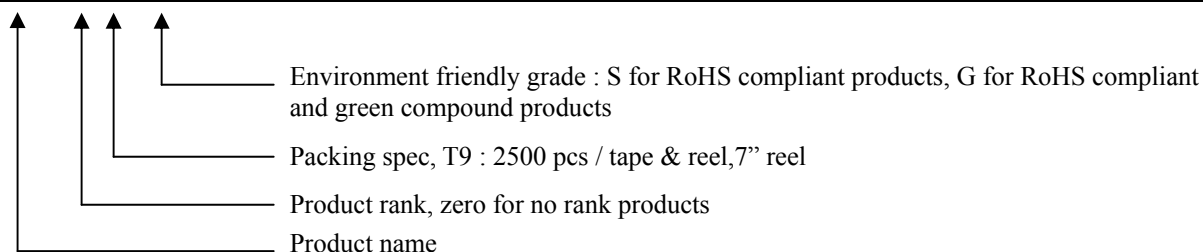


Recommended Soldering Footprint

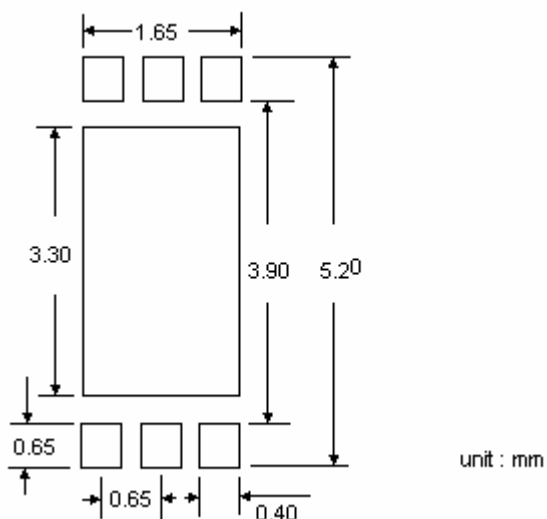


Typical Characteristics


Typical Output Characteristics

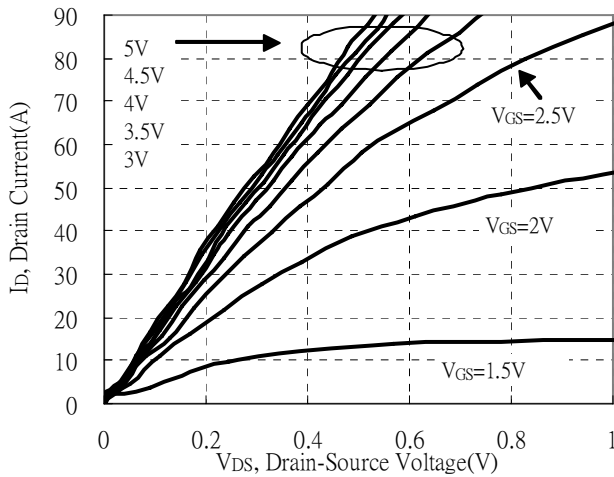


Brekdown Voltage vs Ambient Temperature

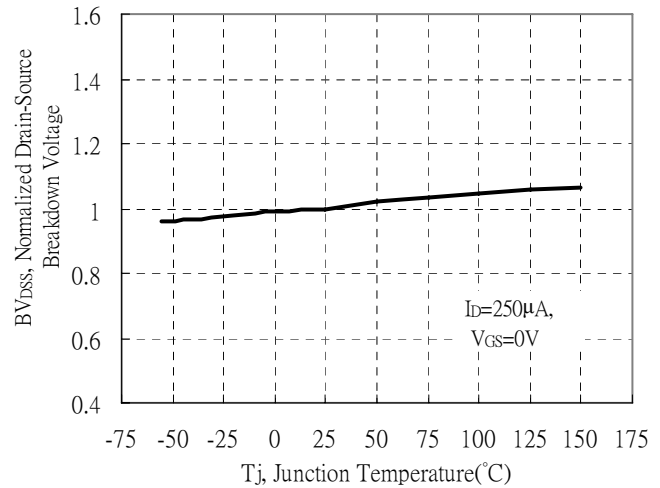


Static Drain-Source On-State resistance vs Drain Current

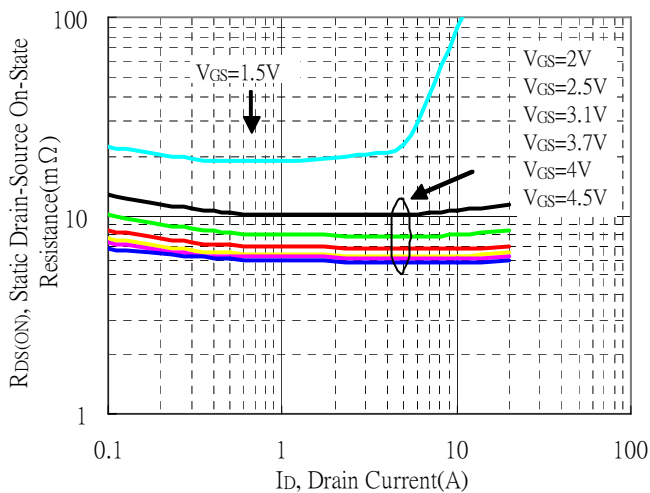


Reverse Drain Current vs Source-Drain Voltage

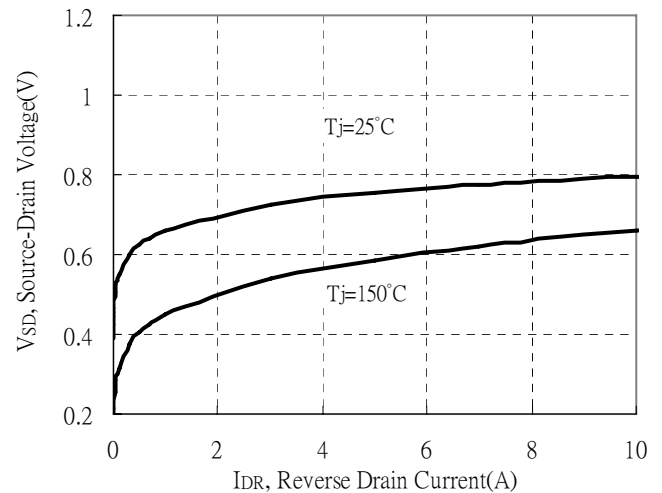

Static Drain-Source On-State Resistance vs Gate-Source Voltage

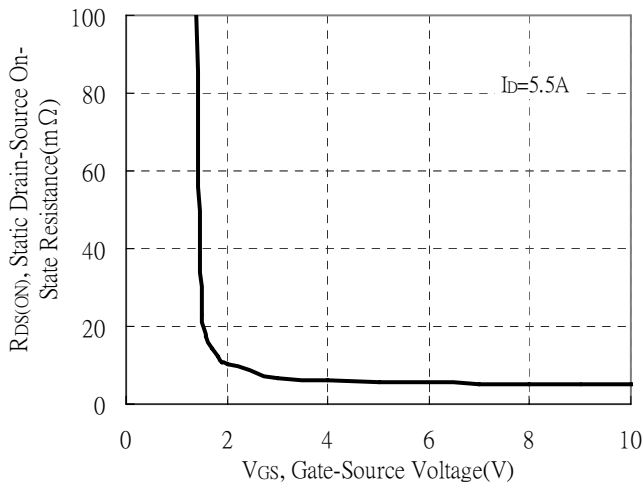


Drain-Source On-State Resistance vs Junction Temperature

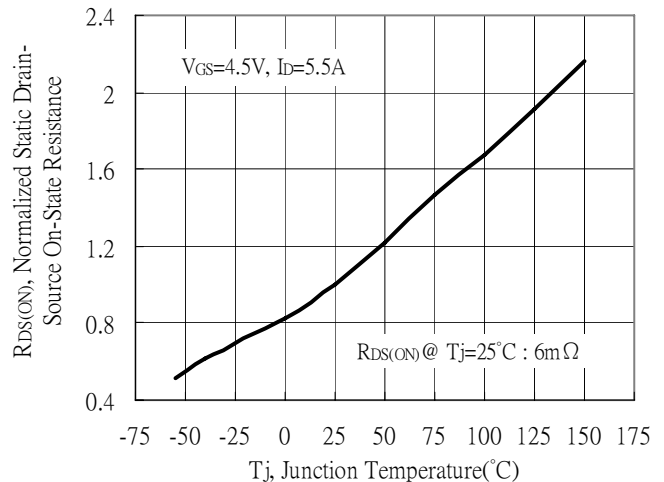


Typical Characteristics(Cont.)


Capacitance vs Drain-to-Source Voltage

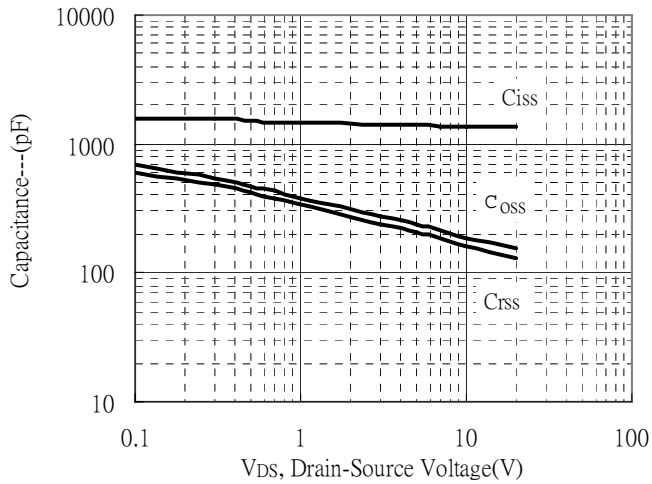


Threshold Voltage vs Junction Temperature

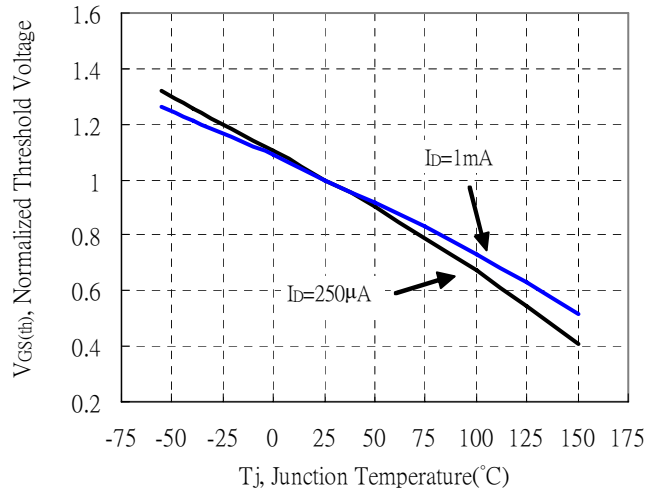


Forward Transfer Admittance vs Drain Current

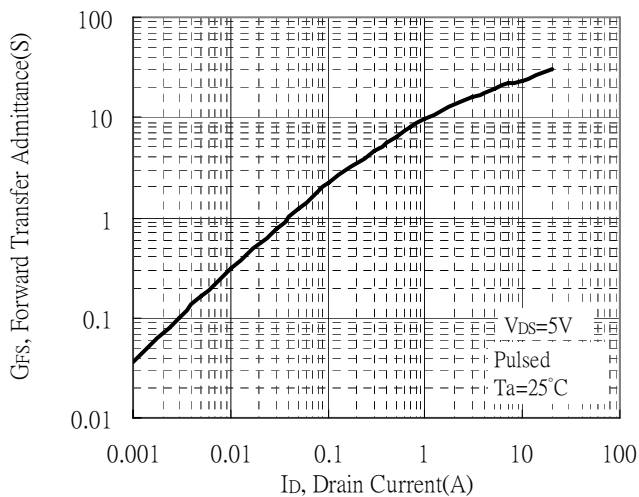


Gate Charge Characteristics

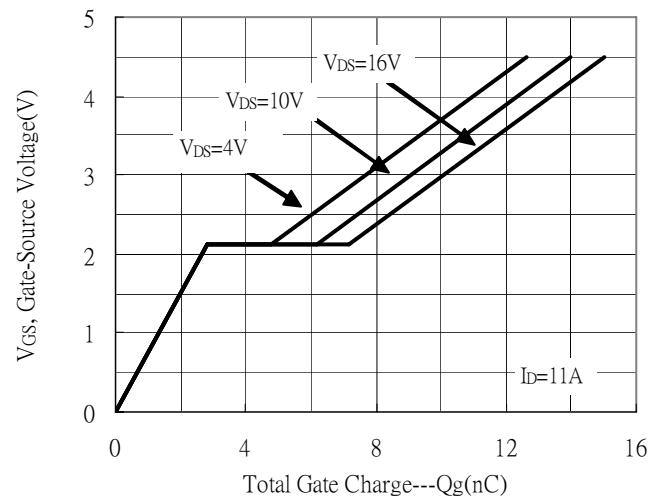

Maximum Safe Operating Area

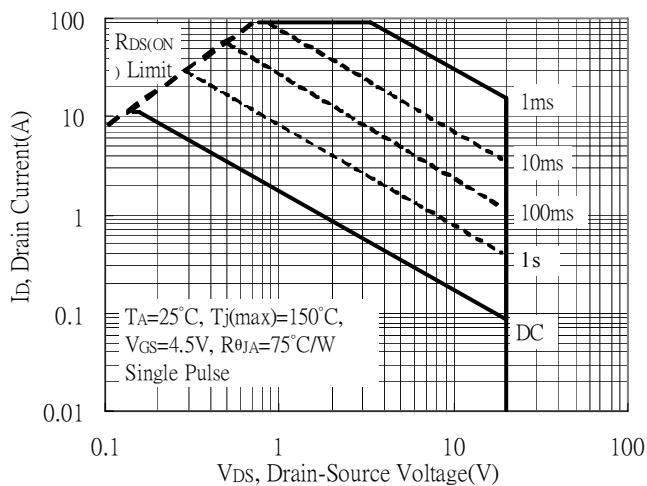


Maximum Drain Current vs Junction Temperature

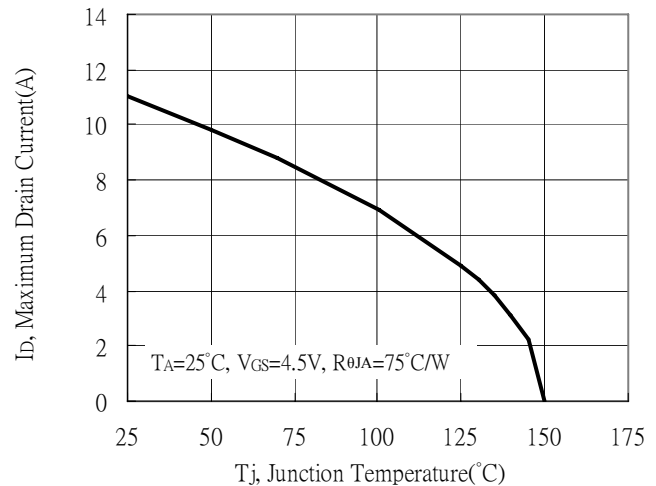


Typical Characteristics(Cont.)


Typical Transfer Characteristics

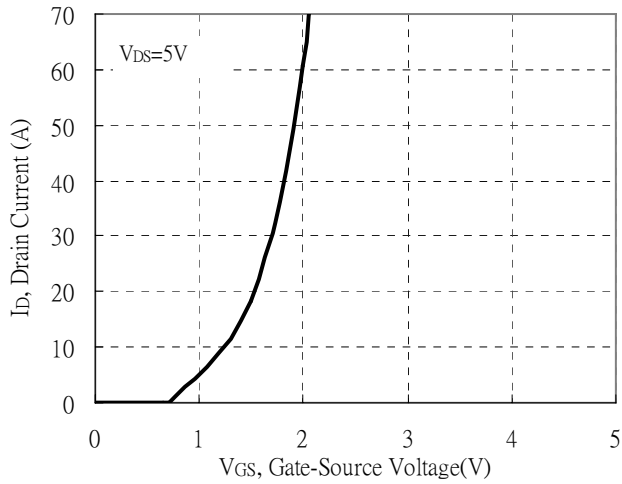


Single Pulse Maximum Power Dissipation

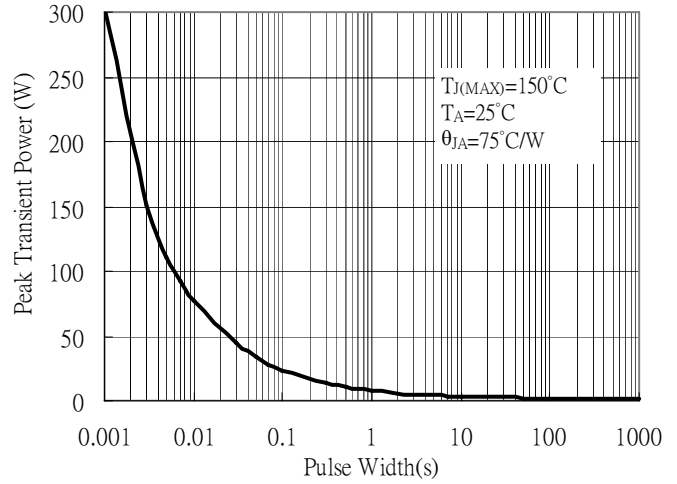


Transient Thermal Response Curves

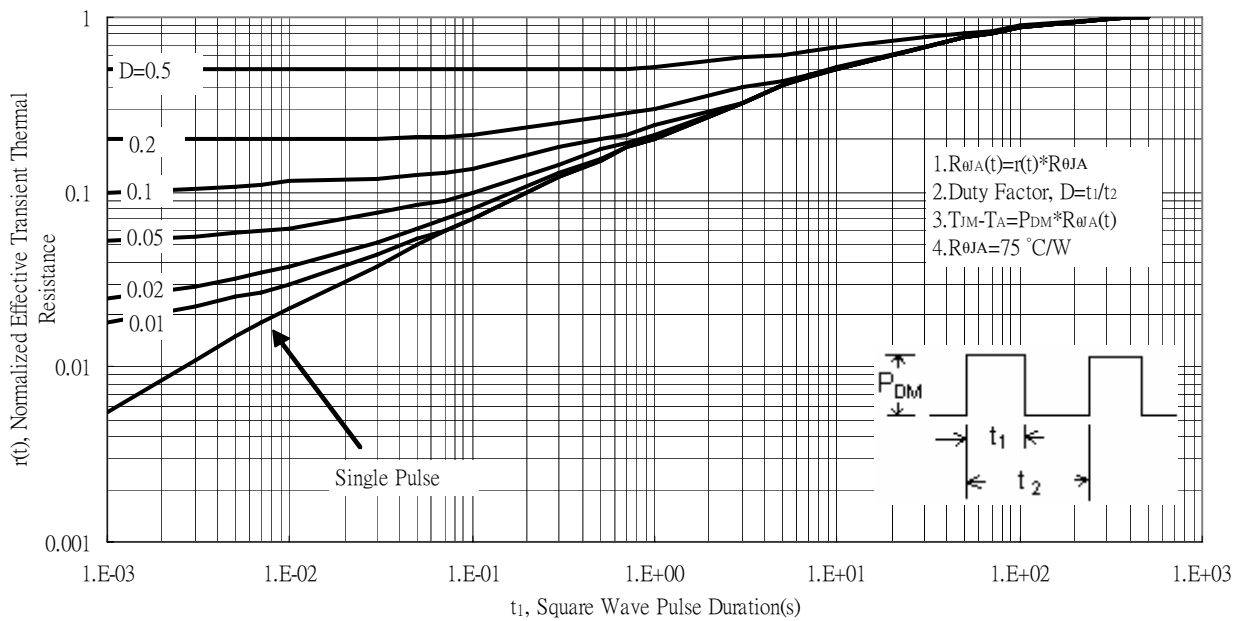

Reel Dimension

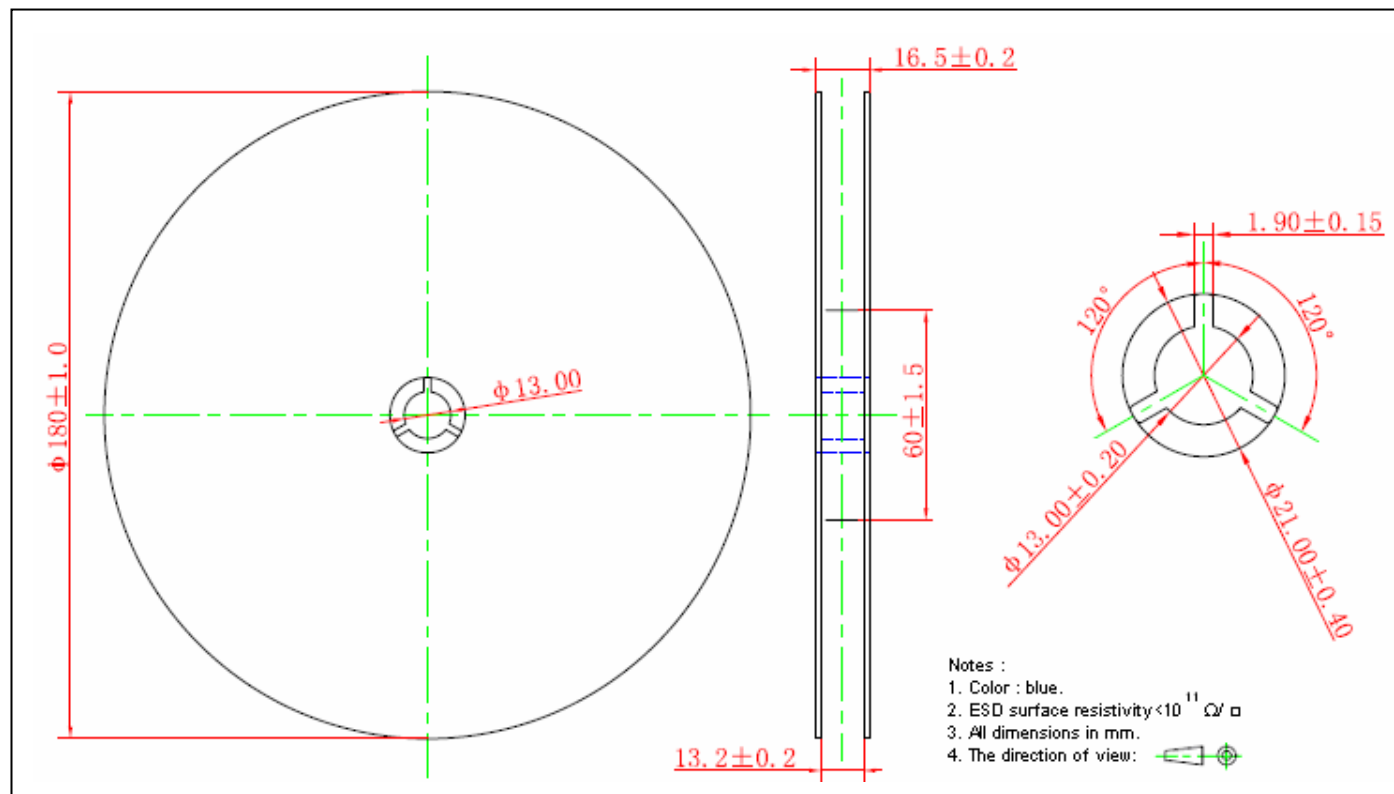


Carrier Tape Dimension

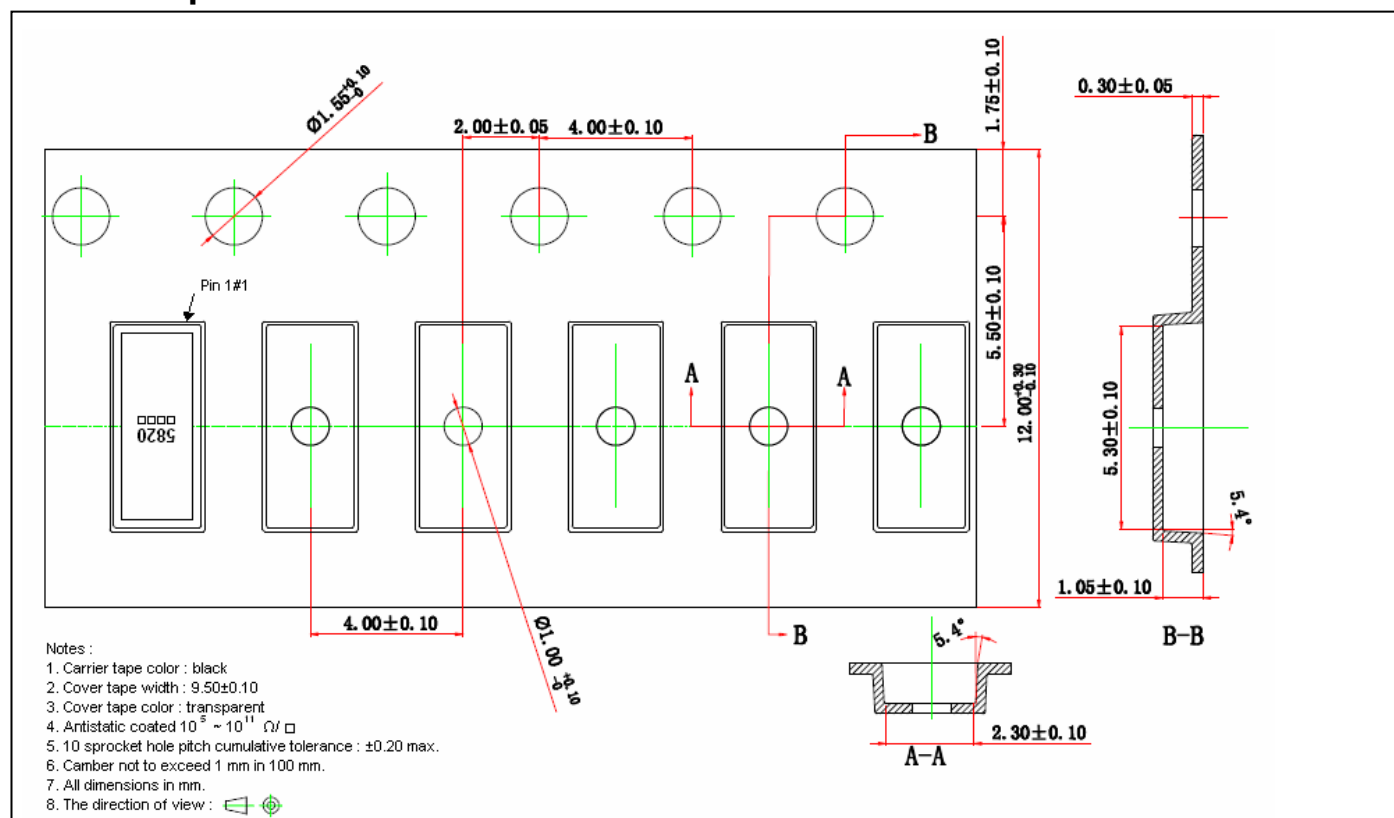

Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


Recommended temperature profile for IR reflow

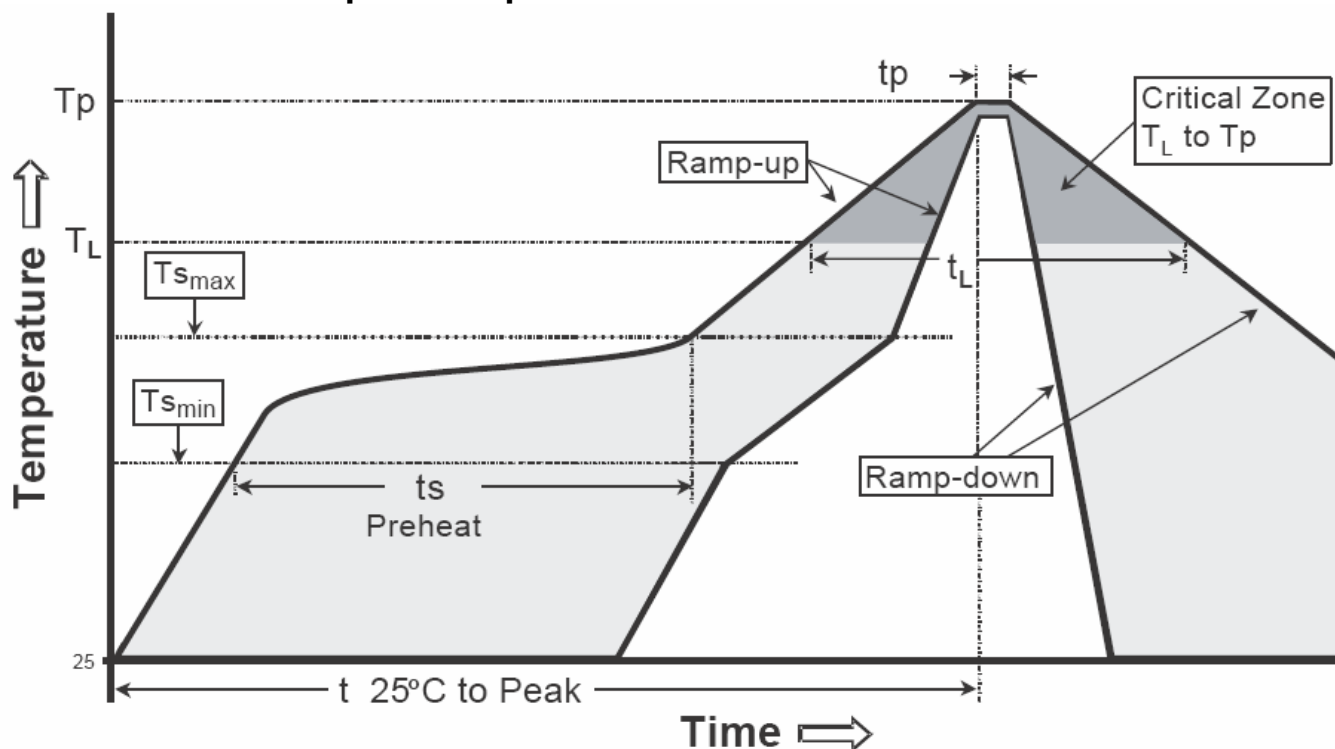

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T_{smax} to T_p)	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T_{smin})	100°C	150°C
-Temperature Max(T_{smax})	150°C	200°C
-Time(t_{smin} to t_{smax})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T_L)	183°C	217°C
- Time (t_L)	60-150 seconds	60-150 seconds
Peak Temperature(T_p)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(t_p)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

TDFN2x5-6L Dimension

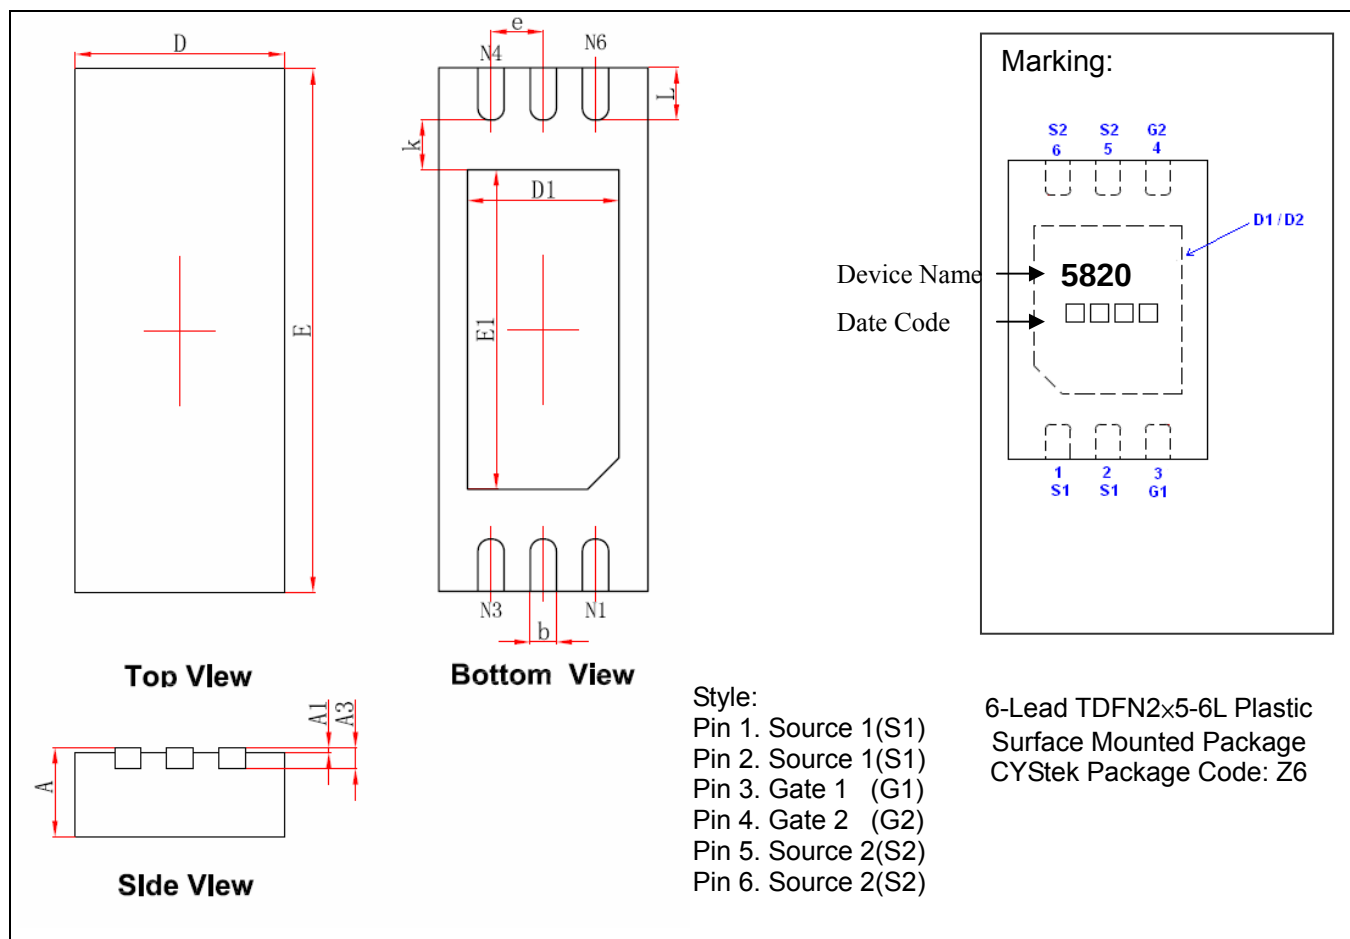

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.700	0.900	0.028	0.035	E1	2.950	3.150	0.116	0.124
A1	0.000	0.050	0.000	0.002	k	0.200	-	0.008	-
A3	0.203	REF	0.008	REF	b	0.200	0.300	0.008	0.012
D	1.924	2.076	0.076	0.082	e	0.500	TYP	0.020	TYP
E	4.924	5.076	0.194	0.200	L	0.424	0.576	0.017	0.023
D1	1.350	1.550	0.053	0.061					

Notes : 1. Controlling dimension : millimeters.

2. Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3. If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material :

- Lead : Pure tin plated.
- Mold Compound : Epoxy resin family, flammability solid burning class: UL94V-0.

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.