

N-Channel Enhancement Mode Power MOSFET

MTN13N50FP

BV_{DSS} : 500V
R_{DS(ON)} : 0.48 Ω
I_D : 13A**Description**



The MTN13N50FP is a N-channel enhancement-mode MOSFET, providing the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost effectiveness. The TO-220FP package is universally preferred for all commercial-industrial applications

Features

- BV_{DSS}=550V typically @ T_j=150°C
- Low On Resistance
- Simple Drive Requirement
- Low Gate Charge
- Fast Switching Characteristic
- RoHS compliant package

Applications

- Power Factor Correction
- LCD TV Power
- Full and Half Bridge Power

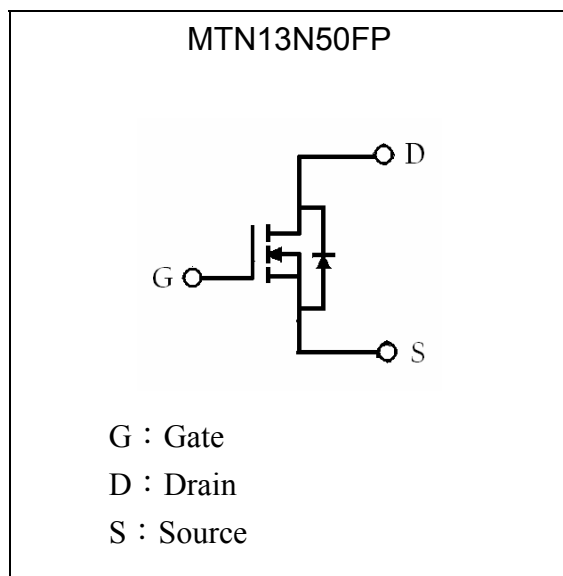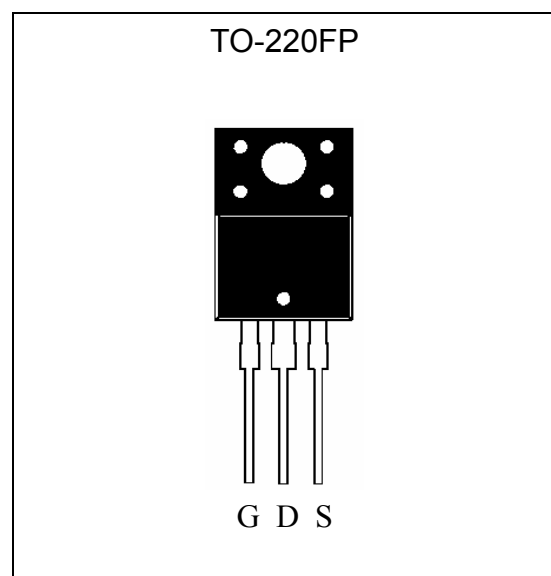Symbol**Outline**

**Absolute Maximum Ratings** ($T_C=25^{\circ}\text{C}$)

Parameter	Symbol	Limits	Unit
Drain-Source Voltage (Note 1)	V_{DS}	500	V
Gate-Source Voltage	V_{GS}	± 30	V
Continuous Drain Current	I_D	13*	A
Continuous Drain Current @ $T_C=100^{\circ}\text{C}$	I_D	8*	A
Pulsed Drain Current @ $V_{GS}=10\text{V}$ (Note 2)	I_{DM}	52*	A
Single Pulse Avalanche Energy @ $L=3\text{mH}$, $I_D=13\text{Amps}$, $V_{DD}=50\text{V}$	E_{AS}	250	mJ
Avalanche Current (Note 2)	I_{AR}	13	A
Peak Diode Recovery dv/dt (Note 3)	dv/dt	3.0	V/ns
Maximum Temperature for Soldering @ Lead at 0.063 in(1.6mm) from case for 10 seconds	T_L	300	$^{\circ}\text{C}$
Maximum Temperature for Soldering @ Package Body for 10 seconds	T_{PKG}	260	$^{\circ}\text{C}$
Total Power Dissipation ($T_C=25^{\circ}\text{C}$) Linear Derating Factor above 25°C	P_d	48	W
		0.4	W/ $^{\circ}\text{C}$
Operating Junction and Storage Temperature	T_j, T_{stg}	-55~+150	$^{\circ}\text{C}$

*Drain current limited by maximum junction temperature

Note : 1. $T_J=+25^{\circ}\text{C}$ to $+150^{\circ}\text{C}$.

2. Repetitive rating; pulse width limited by maximum junction temperature.

3. $ISD=10\text{A}$, $dI/dt<100\text{A}/\mu\text{s}$, $V_{DD}<BVDSS$, $T_J=+150^{\circ}\text{C}$.**Thermal Data**

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-case, max	$R_{th,j-c}$	2.58	$^{\circ}\text{C}/\text{W}$
Thermal Resistance, Junction-to-ambient, max	$R_{th,j-a}$	100	$^{\circ}\text{C}/\text{W}$

**Characteristics (Tj=25°C, unless otherwise specified)**

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV _{DSS}	500	-	-	V	V _{GS} =0, I _D =250μA
BV _{DSS}	-	550	-	V	V _{GS} =0, I _D =250μA, T _j =150°C
ΔBV _{DSS} /ΔT _j	-	0.5	-	V/°C	Reference to 25°C, I _D =250μA
V _{GS(th)}	2.0	-	4.0	V	V _{DS} = V _{GS} , I _D =250μA
*G _{FS}	-	15	-	S	V _{DS} =15V, I _D =6.5A
I _{GSS}	-	-	±100	nA	V _{GS} =±30
I _{DSS}	-	-	20	μA	V _{DS} =500V, V _{GS} =0
I _{DSS}	-	-	200	μA	V _{DS} =400V, V _{GS} =0, T _j =125°C
*R _{DS(ON)}	-	0.38	0.48	Ω	V _{GS} =10V, I _D =7.8A
Dynamic					
*Q _g	-	40	-	nC	I _D =13A, V _{DD} =250V, V _{GS} =10V
*Q _{gs}	-	10	-		
*Q _{gd}	-	15	-		
*t _{d(ON)}	-	16	-	ns	V _{DD} =250V, I _D =13A, V _{GS} =10V, R _G =9.1 Ω
*t _r	-	30	-		
*t _{d(OFF)}	-	48	-		
*t _f	-	34	-		
C _{iss}	-	2222	-	pF	V _{GS} =0V, V _{DS} =25V, f=1MHz
C _{oss}	-	180	-		
C _{rss}	-	17	-		
Source-Drain Diode					
*V _{SD}	-	-	1.5	V	I _S =13A, V _{GS} =0V
*I _S	-	-	13	A	V _D =V _G =0, V _S =1.3V
*I _{SM}	-	-	52		
*t _{rr}	-	392	-	ns	V _{GS} =0, I _F =13A, dI/dt=100A/μs
*Q _{rr}	-	3529	-	nC	

*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

Ordering Information

Device	Package	Shipping	Marking
MTN13N50FP	TO-220FP (RoHS compliant)	50 pcs/tube, 20 tubes/box, 4 boxes / carton	13N50

Characteristic Curves

Figure 1. Transient Thermal Response Curve

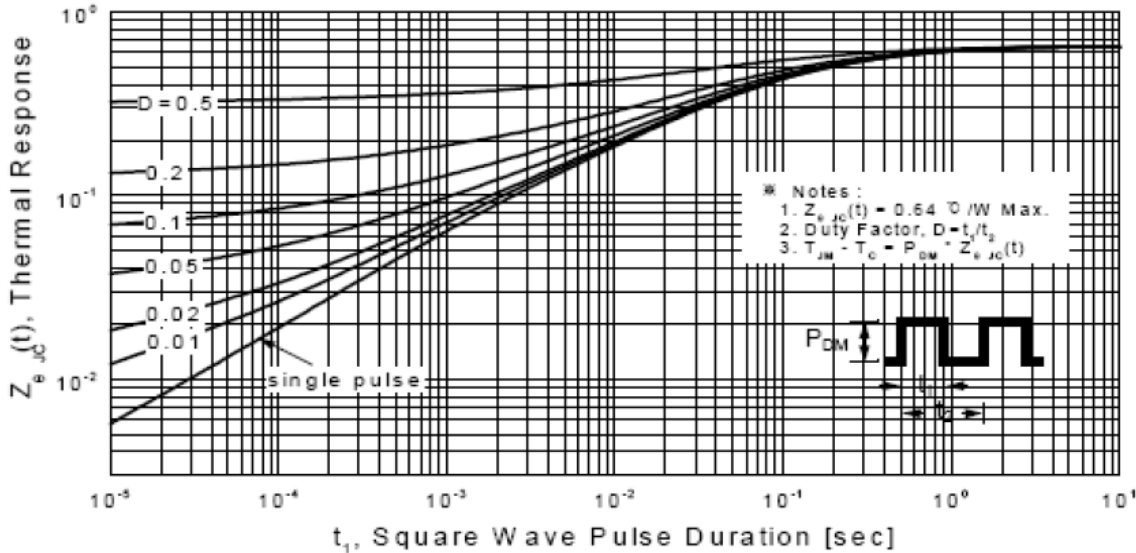


Figure 2. Maximum Drain Current vs Case Temperature

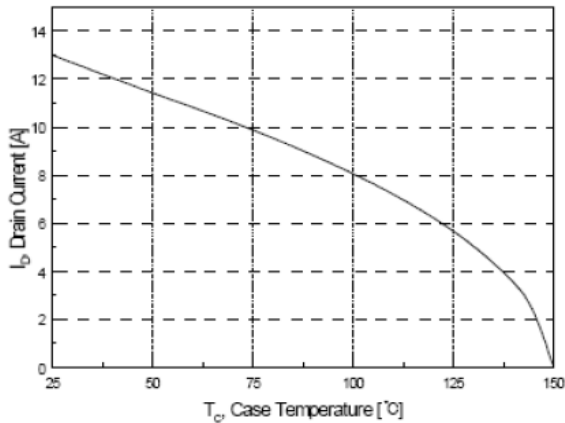


Figure 4. Transfer Characteristics

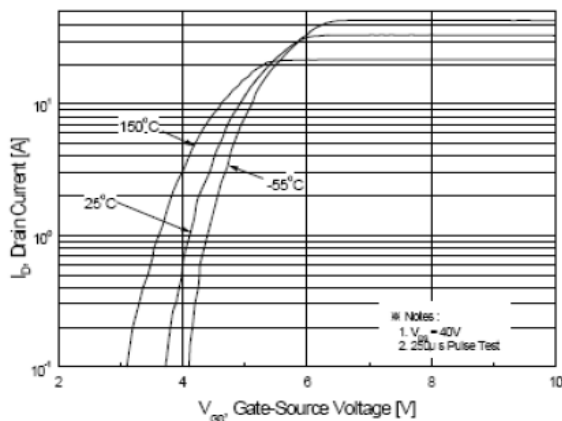


Figure 3. On-Region Characteristics



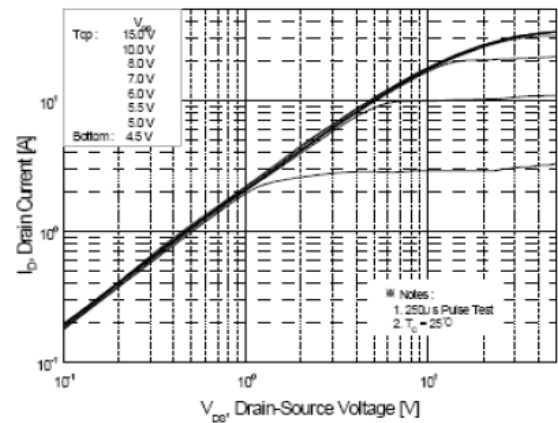


Figure 5. Capacitance Characteristics

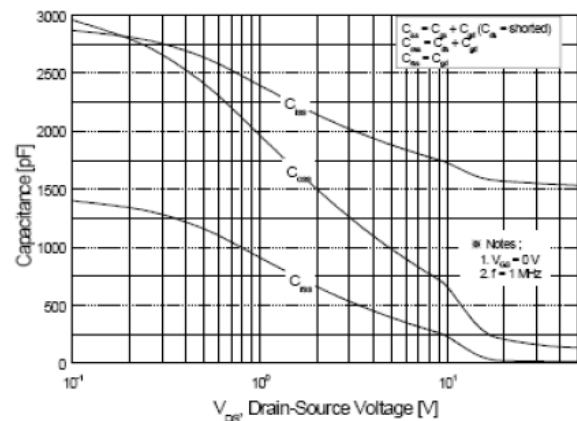


Characteristic Curves(Cont.)

**Figure 6. Body Diode Forward Voltage
Variation with Source Current
and Temperature**

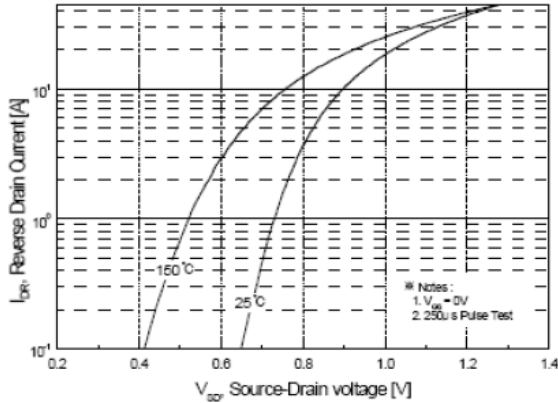

**Figure 7. On-Resistance Variation vs
Drain Current and Gate Voltage**

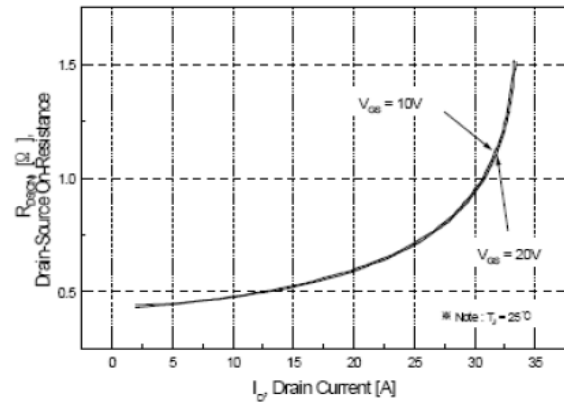

**Figure 8. Breakdown Voltage Variation
vs Temperature**


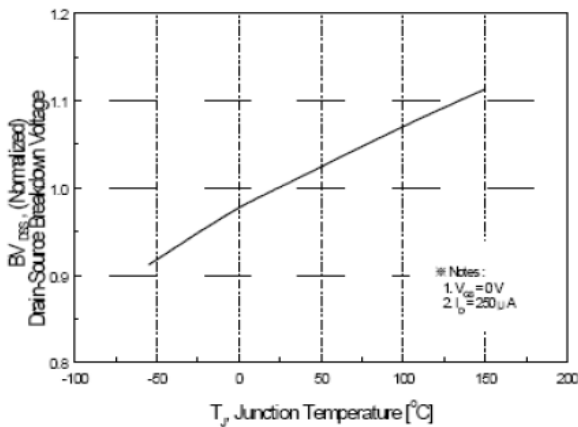


Figure 9. Gate Charge Characteristics

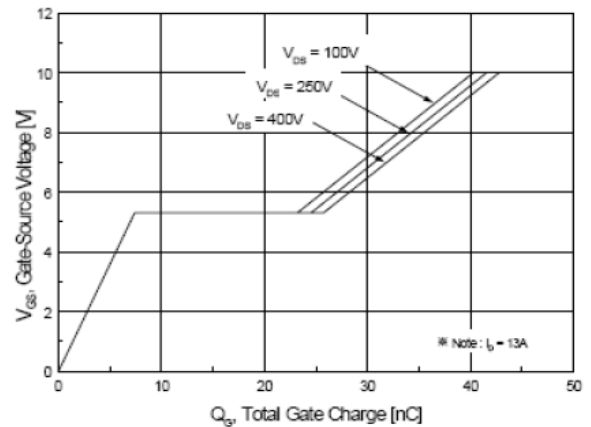

**Figure 10. On-Resistance Variation
vs Temperature**


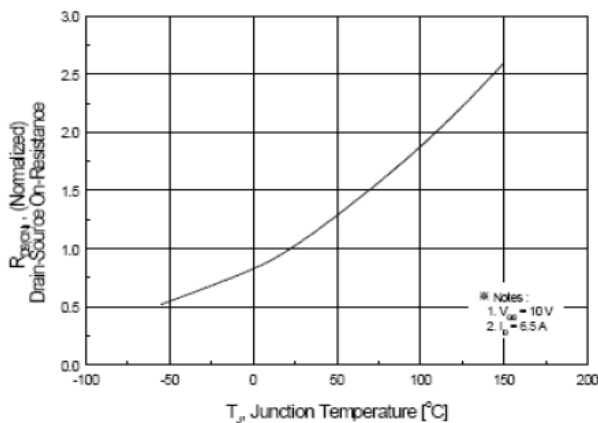


Figure 11. Maximum Safe Operating Area

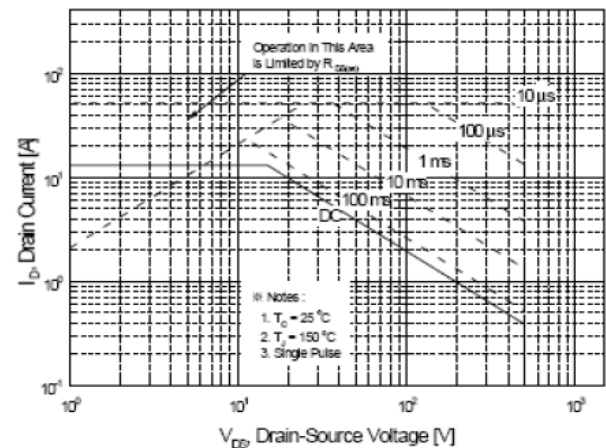

Test Circuit and Waveforms

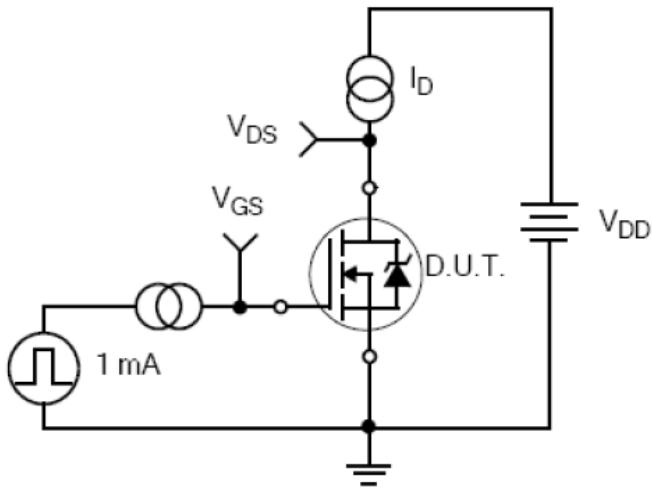


Figure 12. Gate Charge Test Circuit

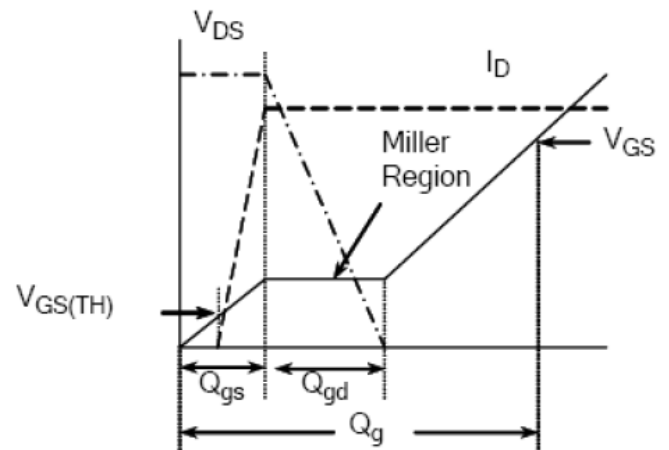


Figure 13. Gate Charge Waveform

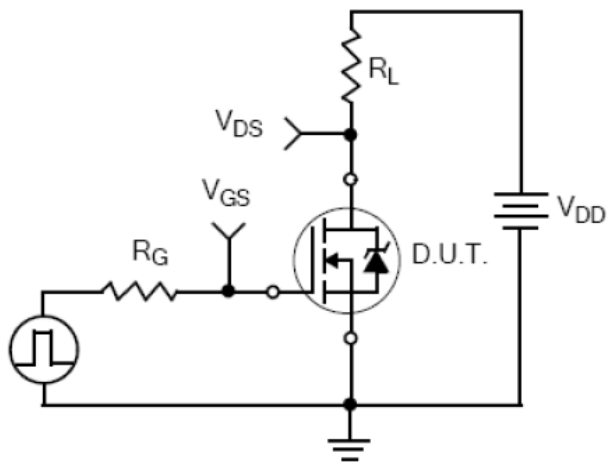


Figure 14. Resistive Switching Test Circuit

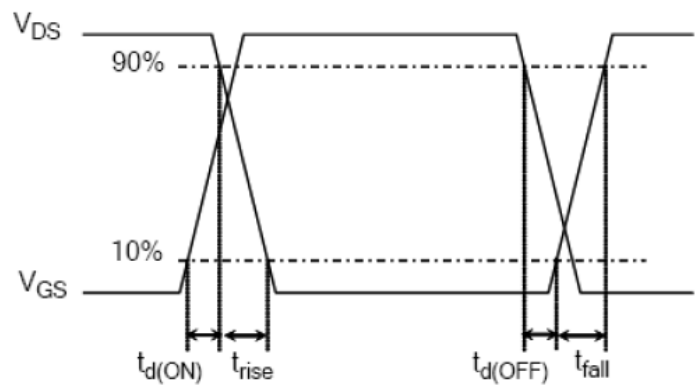
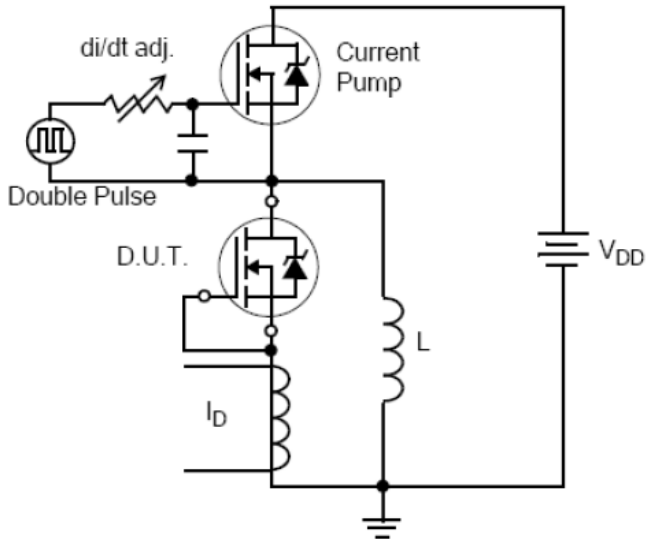
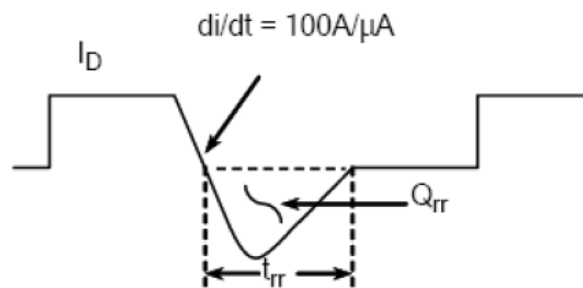
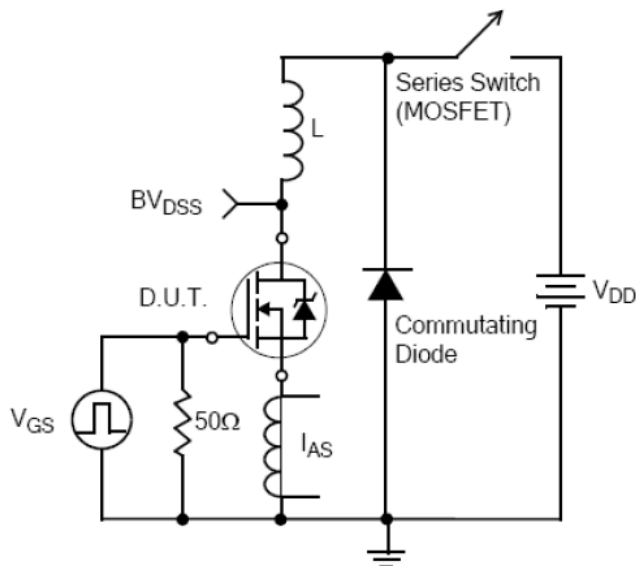
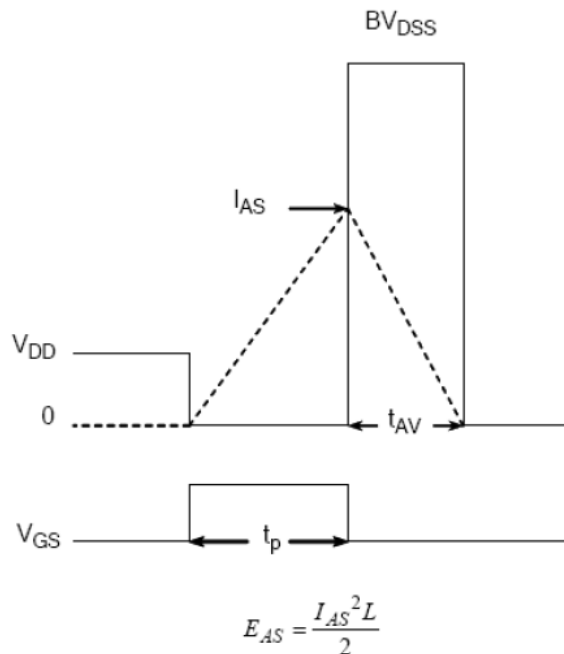
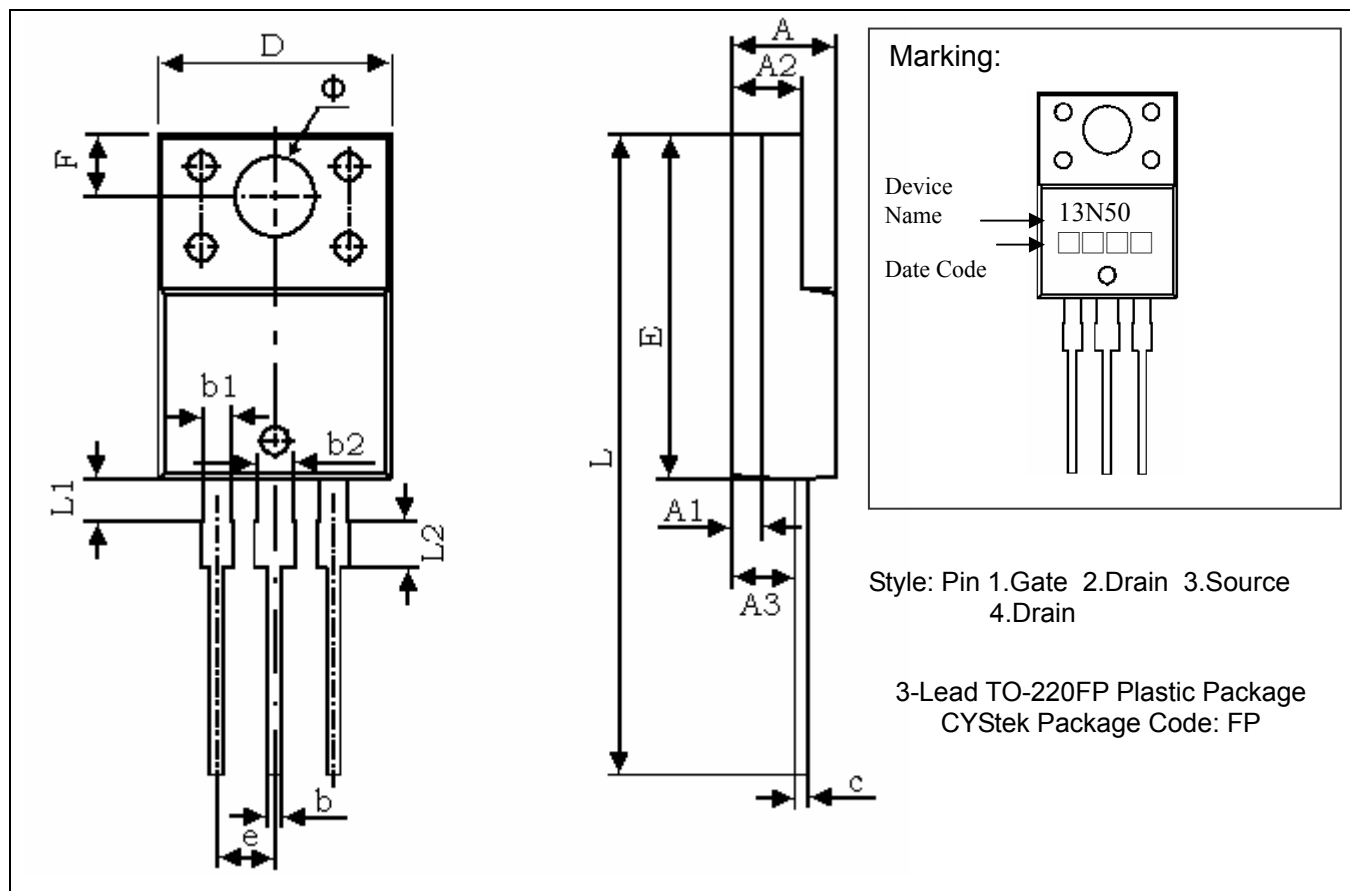


Figure 15. Resistive Switching Waveforms

Test Circuit and Waveforms(Cont.)

Figure 16. Diode Reverse Recovery Test Circuit

Figure 17. Diode Reverse Recovery Waveform

Figure 18. Unclamped Inductive Switching Test Circuit

Figure 19. Unclamped Inductive Switching Waveforms

TO-220FP Dimension



*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.169	0.185	4.300	4.700	D	0.392	0.408	9.960	10.360
A1	0.051 REF		1.300 REF		E	0.583	0.598	14.800	15.200
A2	0.110	0.126	2.800	3.200	e	0.100 TYP		2.540 TYP	
A3	0.098	0.114	2.500	2.900	F	0.106 REF		2.700 REF	
b	0.020	0.030	0.500	0.750	Φ	0.138 REF		3.500 REF	
b1	0.043	0.053	1.100	1.350	L	1.102	1.118	28.000	28.400
b2	0.059	0.069	1.500	1.750	L1	0.067	0.075	1.700	1.900
c	0.020	0.030	0.500	0.750	L2	0.075	0.083	1.900	2.100

Notes: 1.Controlling dimension: millimeters.

2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: KFC ; pure tin plated
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.