


MTSM0302AZ-UBL

Features

Compatible with Automatic Placement Equipment
 Packaged in 12.0mm Tape on 7" Diameter Reels
 Surface Mount LED Lamp
 Long Life Solid State Reliability

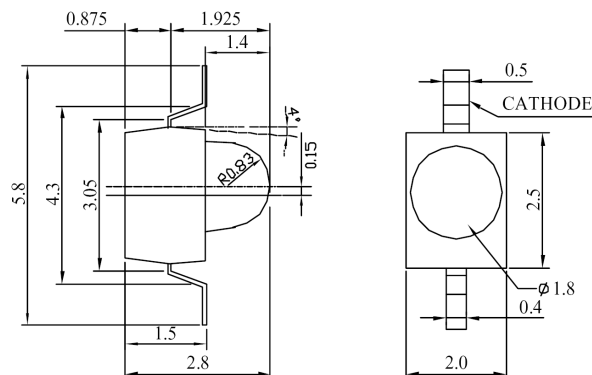

Maximum Ratings (Ta=25°C)

Characteristic	Symbol	Max.	Unit
Forward Current	I _F	20	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	80.00	mW
Operating Temperature	T _{opr}	-25 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Soldering Temperature	T _{sol}	260	°C
Soldering Time	—	for 5 sec. max	—

Notes:

1. All dimensions are in millimeters.


2. Tolerance is ± 0.25 mm unless otherwise noted.

Opto-Electrical Characteristics (Ta=25°C)


Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =20mA	—	3.20	4.00	V
Reverse Current	I _R	V _R =5V	—	—	50	μA
Luminous Intensity	I _v	I _F =20mA	220.00	370.00	—	mcd
Viewing Angle	2θ _{1/2}	—	—	36°	—	deg.
Peak Wavelength	λ _p	I _F =20mA	—	468	—	nm
Dominant Wavelength	λ _d	I _F =20mA	—	470	—	nm
Spectral Line Half Width	Δλ	I _F =20mA	—	26	—	nm

MTSM0302AZ-UBL Graphs


Typical Electrical / Optical Characteristics Curves :

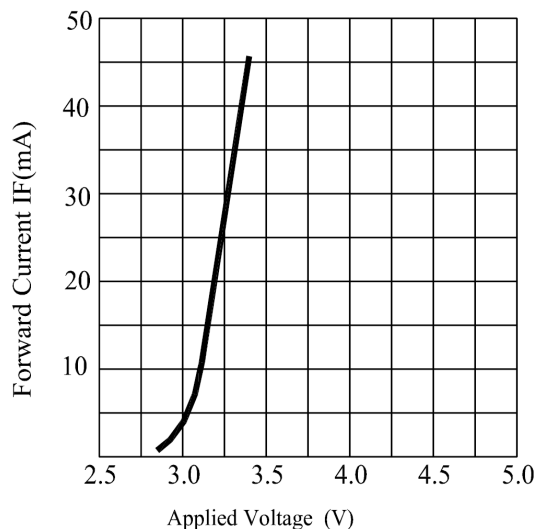


FORWARD CURRENT VS. APPLIED VOLTAGE

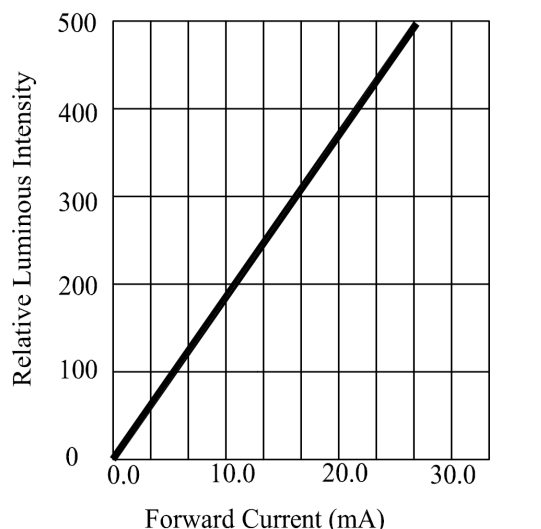

FORWARD CURRENT VS. LUMINOUS INTENSITY

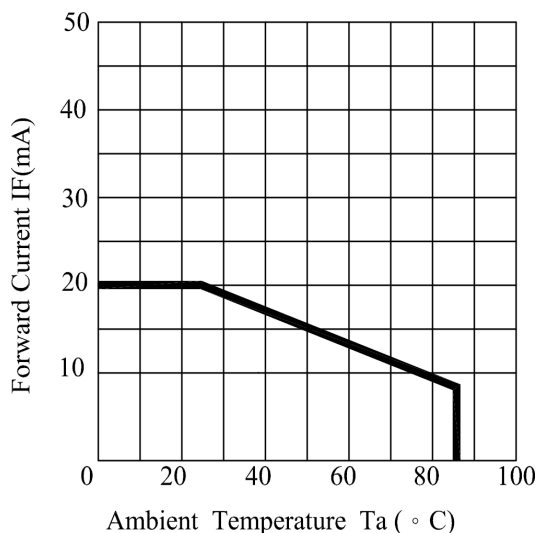

AMBIENT TEMPERATURE VS. FORWARD CURRENT

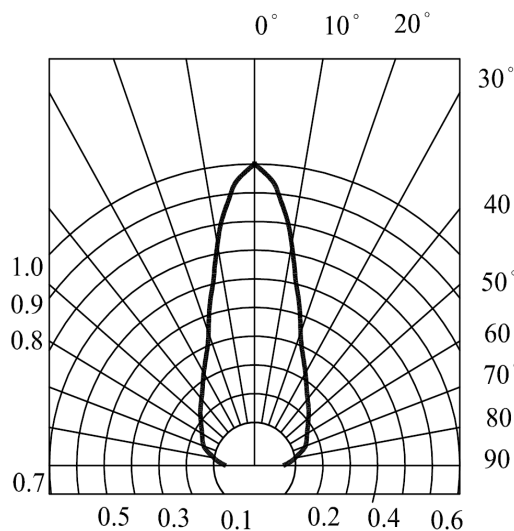

RADIATION DIAGRAM