

Ultrafast Recovery Rectifier

MUR1650CT

FEATURES

- Ultrafast Recovery Time
- Low Forward Voltage
- Low Leakage Current
- 175°C Operating Junction Temperature
- High Temperature Glass Passivated Junction

MECHANICAL CHARACTERISTICS



- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds

APPLICATIONS

- Designed for use in switching power supplies, inverters and as free wheeling diodes.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{RRM} V_{RWM} V_R	Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	500	V
$I_{F(AV)}$	Average Rectified Forward Current Per Leg (Rated V_R) Total Device	8 16	A
I_{FM}	Peak Repetitive Forward Current (Rated V_R , Square Wave, 20kHz) Per Diode Leg	16	A
I_{FSM}	Nonrepetitive Peak Surge Current (Surge applied at rated load conditions half-wave, single phase, 60Hz)	100	A
T_J	Junction Temperature	-65~175	°C
T_{stg}	Storage Temperature Range	-65~175	°C

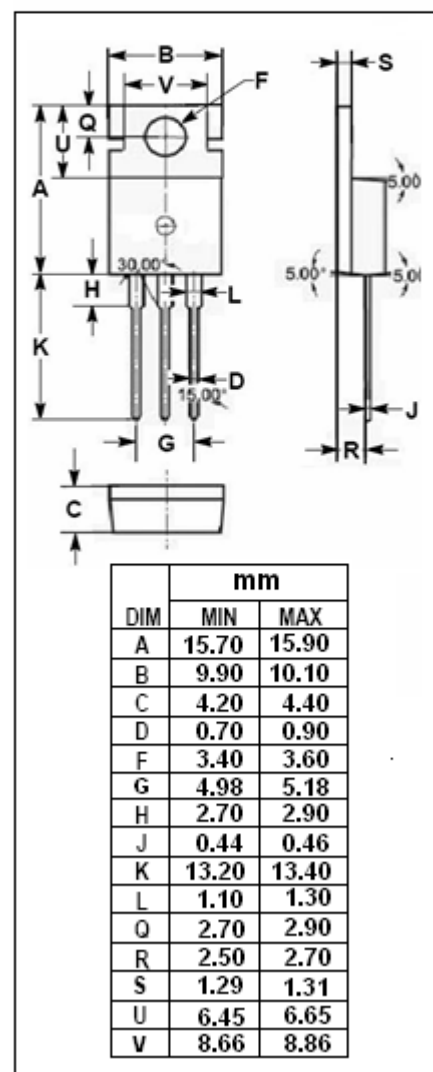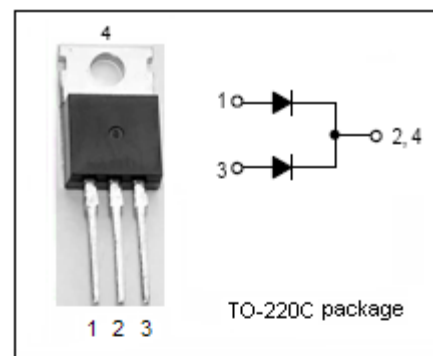

Ultrafast Recovery Rectifier**MUR1650CT****THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	2.0	$^{\circ}C/W$

ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}C$) (Pulse Test: Pulse Width=300 μ s, Duty Cycle $\leq$ 2%)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	$I_F=8A$	1.68	V
I_R	Maximum Instantaneous Reverse Current	$V_{RRM}=500V$	3	μA
t_{rr}	Maximum Reverse Recovery Time	$I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$	60	ns