



Micro Commercial Components
21201 Itasca Street Chatsworth
CA 91311

Phone: (818) 701-4933

Fax: (818) 701-4939

MUR20005CT THRU MUR20060CT

Features

- Supre Fast switching for high efficiency
- High Surge Capability
- Low Leakage
- Low Forward Voltage Drop
- High Current Capability

Maximum Ratings

- Operating Temperature: -55°C to +175°C
- Storage Temperature: -55°C to +175°C

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MUR20005CT	50V	35V	50V
MUR20010CT	100V	70V	100V
MUR20020CT	200V	40V	200V
MUR20040CT	400V	280V	400V
MUR20060CT	600V	420V	600V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	200 A	$T_C = 135^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	800A	8.3ms, half sine
Maximum Instantaneous Forward Voltage 20005CT-20020CT 20040CT-20060CT	V_F	1.25V 1.75V	$I_{FM} = 100.0\text{A};$ $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	50μA 6 mA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
Maximum Reverse Recovery Time 20005CT-20020CT 20040CT 20060CT	T_{rr}	60ns 75ns 90ns	$I_F = 0.5\text{A}, I_R = 1.0\text{A},$ $I_{rr} = 0.25\text{A}$
Typical Junction Capacitance 20005CT-20020CT 20040CT 20060CT	C_J	575pF 300pF 275pF	Measured at 1.0MHz, $V_R = 10\text{V}$

*Pulse Test: Pulse Width 300μsec, Duty Cycle 2%


200 Amp Supre Fast Recovery Rectifier 50 to 600 Volts

FULL PACK

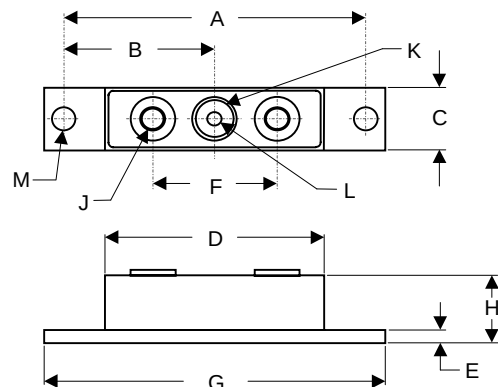


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	3.150	NOM	80.01	NOM	
B	1.565	1.585	39.75	40.26	
C	.700	.800	17.78	20.32	
D	2.400	2.500	60.96	63.50	
E	.119	.132	3.02	3.35	
F	1.375	REF	34.92	REF	
G	3.550	3.650	90.17	92.71	
H	.580	.620	14.73	15.75	
J	1/4 -20 UNF		FULL		
K	.380	.410	9.65	10.41	Ø
L	.185	.195	4.70	4.95	Ø
M	.275	.295	6.99	7.49	Ø

Figure 1
Typical Forward Characteristics

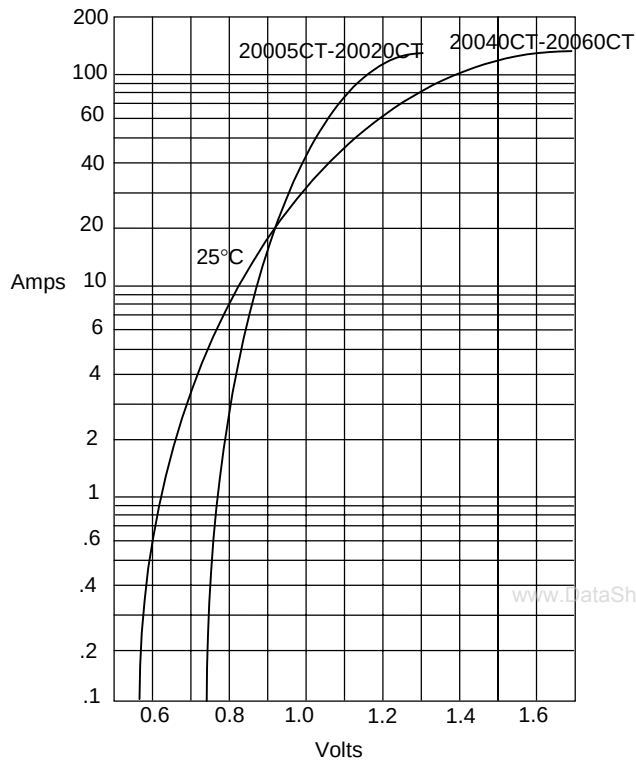


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

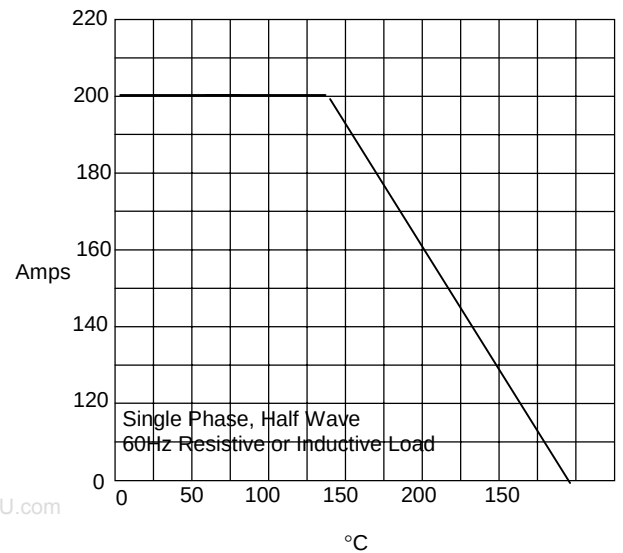


Average Forward Rectified Current - Amperes versus
Case Temperature - °C

Figure 3
Junction Capacitance

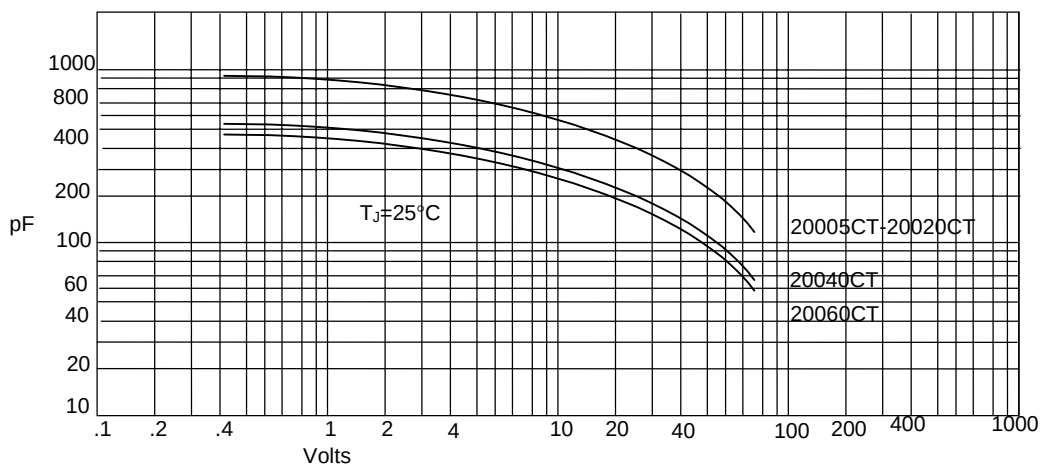


Junction Capacitance - pF versus
Reverse Voltage - Volts

Figure 4
Typical Reverse Characteristics

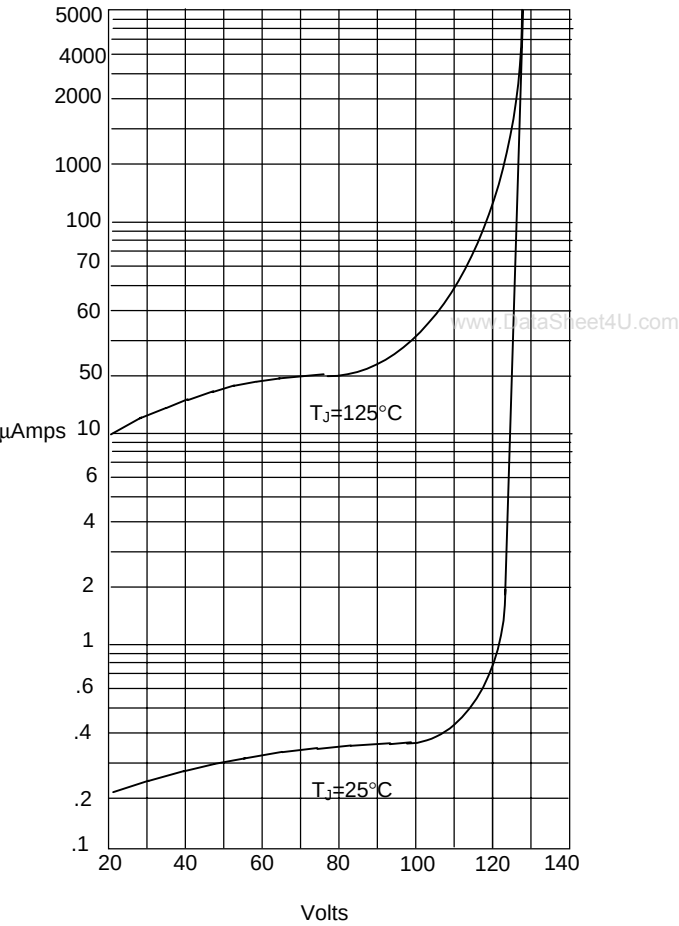

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

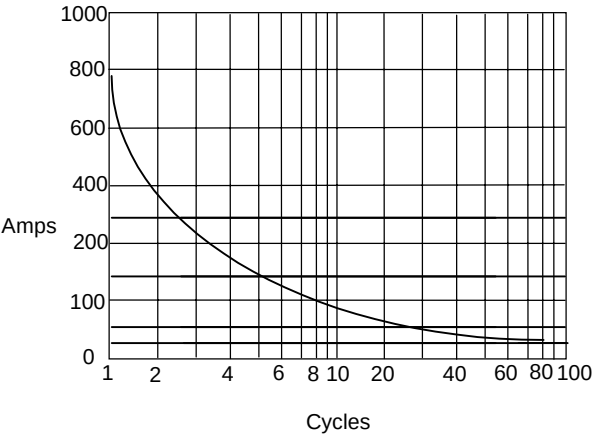

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles