

30.0 AMPS. Glass Passivated Super Fast Rectifiers
Reverse Voltage 50 to 400 Volts Forward Current 30.0 Amperes

Features


- ◆ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◆ Dual rectifier construction, positive center-tap
- ◆ Glass passivated chip junctions
- ◆ Low power loss, high efficiency
- ◆ Superfast recovery time, high voltage
- ◆ Low forward voltage, high current capability
- ◆ Low thermal resistance
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.16" (4.06mm) lead lengths at 5 lbs (2.3kg) tension

Mechanical Data

- ◆ Case: JEDEC TO-3P/TO-247AD molded plastic
- ◆ Terminals: Lead solderable per MIL-STD-750, Method 2026
- ◆ Polarity: As marked
- ◆ Mounting Position: Any
- ◆ Weight: 0.2 ounce, 5.6 grams



TO-3P(TO-247AD)

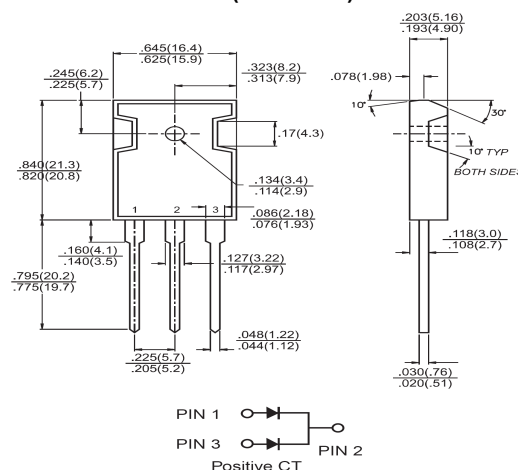

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified.)

Parameter	Symbol	MUR 3005PT	MUR 3010PT	MUR 3015PT	MUR 3020PT	MUR 3030PT	MUR 3040PT	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	V
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	V
Maximum DC Blocking voltage	V _{DC}	50	100	150	200	300	400	V
Maximum Average Forward Rectified Current at Tc=100°C	I _(AV)	30						A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	300						A
Maximum Instantaneous Forward Voltage @15.0A	V _F	0.95				1.30		V
Maximum D.C. Reverse Current @ Tc=25°C	I _R	10.0						uA
at Rated DC Blocking Voltage @ Tc=100°C		500						uA
Maximum Reverse Recovery Time(Note 2) T _J =25°C	trr	35						nS
Typical Junction Capacitance (Note 1)	C _J	175.0						pF
Typical Thermal Resistance (Note 3)	R _{θJC}	2.5						°C/W
Operating Junction Temperature Range	T _J	-55 to +150						°C
Storage Temperature Range	T _{STG}	-55 to +150						°C

Notes:

1. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
2. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, Recover to 0.25A.
3. Mounted on 4" x 6" x 0.25" Al-Plate.

RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

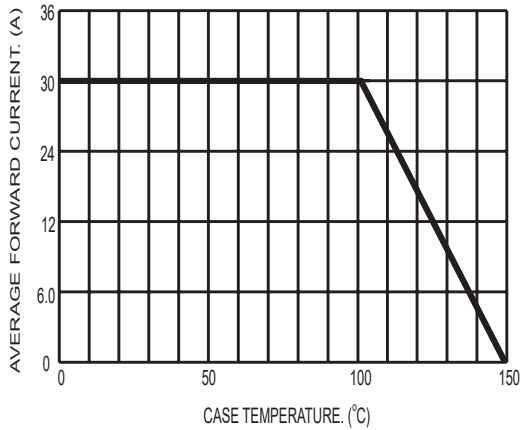


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

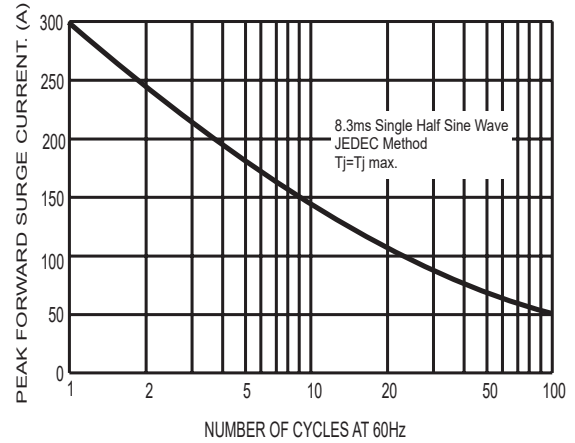


FIG.3- TYPICAL JUNCTION CAPACITANCE PER LEG

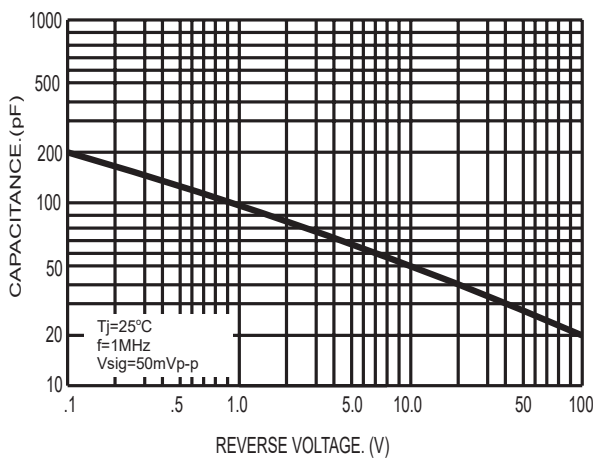


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

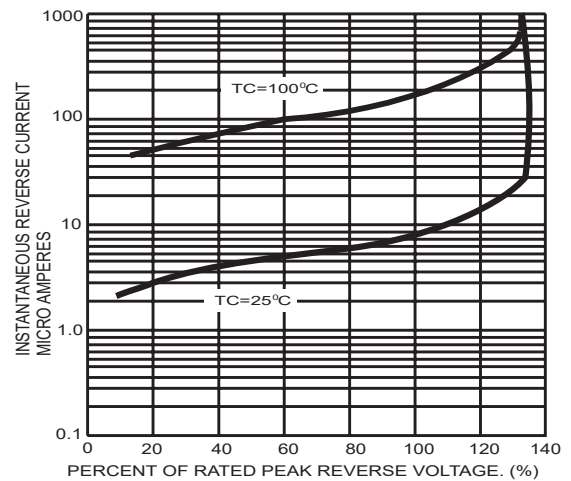


FIG.5- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG


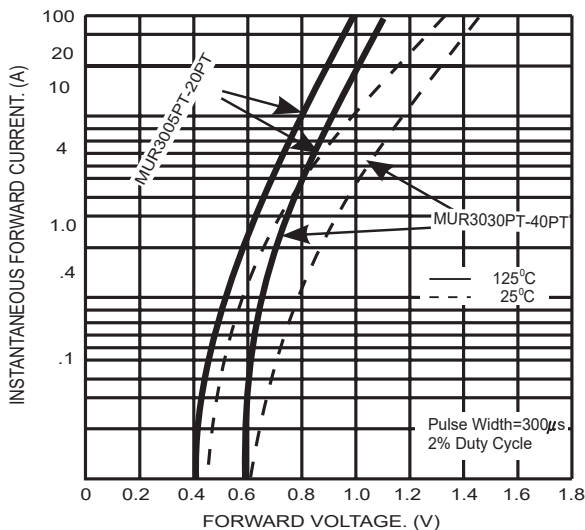


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM



NOTES: 1. Rise Time=7ns max. Input Impedance= 1 megohm 22pf
2. Rise Time=10ns max. Source Impedance= 50 ohms

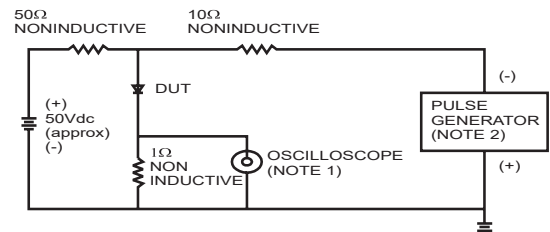