



Silicon Super Fast Recovery Diode

MURT30040 thru MURT30060R


$V_{RRM} = 50\text{ V} - 600\text{ V}$

$I_F = 300\text{ A}$

Features

- High Surge Capability
- Types up to 600 V V_{RRM}

Three Tower Package



Maximum ratings, at $T_j = 25\text{ °C}$, unless otherwise specified ("R" devices have leads reversed)

Parameter	Symbol	Conditions	MURT30040 (R)	MURT30060 (R)	Unit
Repetitive peak reverse voltage	V_{RRM}		400	600	V
RMS reverse voltage	V_{RMS}		283	424	V
DC blocking voltage	V_{DC}		400	600	V
Continuous forward current	I_F	$T_C \leq 125\text{ °C}$	300	300	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ °C}$, $t_p = 8.3\text{ ms}$	2750	2750	A
Operating temperature	T_j		-40 to 175	-40 to 175	°C
Storage temperature	T_{stg}		-40 to 175	-40 to 175	°C

Electrical characteristics, at $T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	MURT30040 (R)	MURT30060 (R)	Unit
Diode forward voltage	V _F	I _F = 150 A, T _j = 25 °C	1.35	1.7	V
Reverse current	I _R	V _R = 50 V, T _j = 25 °C	25	25	μA
		V _R = 50 V, T _j = 125 °C	2	2	mA
Recovery Time					
Maximum reverse recovery time	T _{RR}	I _F =0.5 A, I _R =1.0 A, I _{RR} = 0.25 A	150	200	nS
Thermal characteristics					
Thermal resistance, junction - case	R _{thJC}		0.16	0.16	°C/W





Figure .1- Typical Forward Characteristics

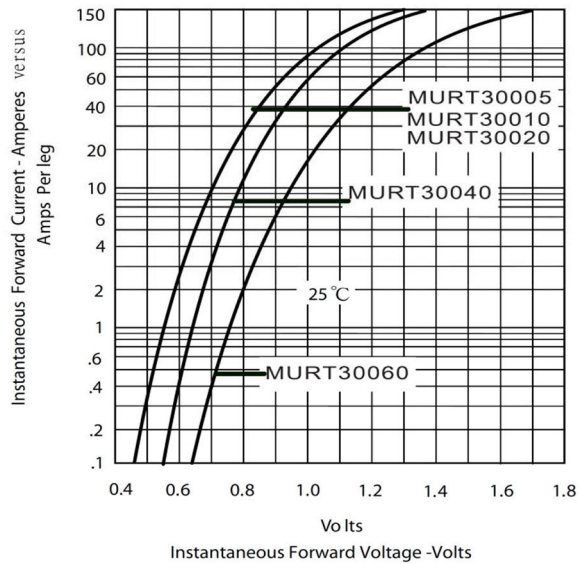


Figure .2- Forward Derating Curve

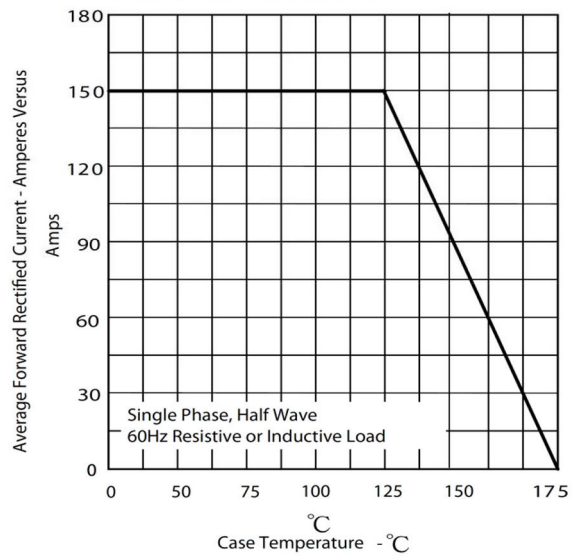


Figure.3- Peak Forward Surge Current

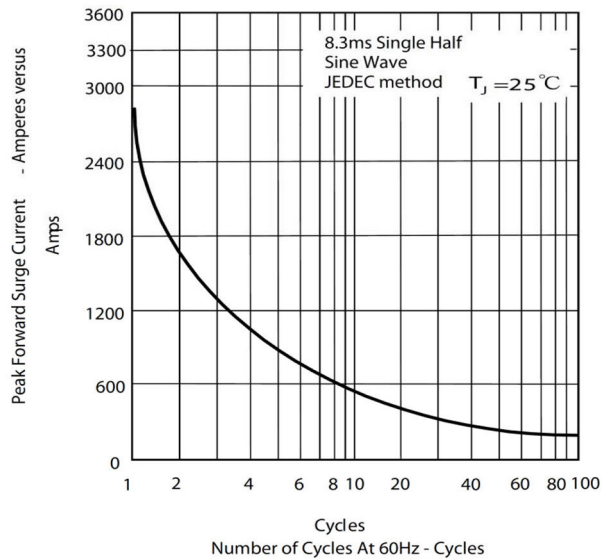


Figure.4- Typical Reverse Characteristics

