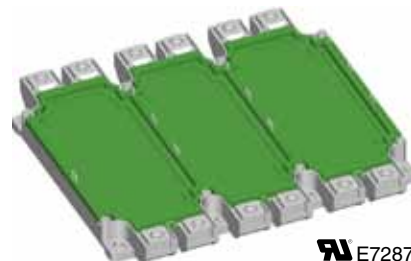
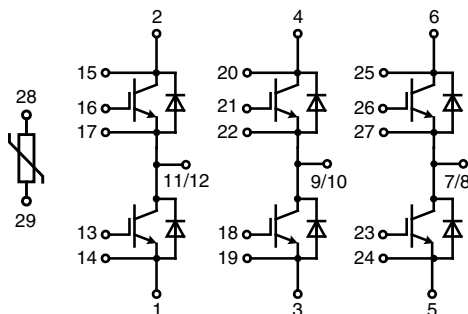


IGBT Modules

Sixpack

$$\begin{aligned} I_{C80} &= 375 \text{ A} \\ V_{CES} &= 1200 \text{ V} \\ V_{CE(sat) \text{ typ.}} &= 2.0 \text{ V} \end{aligned}$$


E72873

See outline drawing for pin arrangement

IGBTs							
Symbol	Conditions	Maximum Ratings					
V_{CES}	$T_{VJ} = 25^{\circ}\text{C}$ to 125°C	1200				V	
V_{GES}		± 20				V	
I_{C25}	$T_C = 25^{\circ}\text{C}$	530				A	
I_{C80}	$T_C = 80^{\circ}\text{C}$	375				A	
RBSOA	$R_G = 3.3\ \Omega$; $T_{VJ} = 125^{\circ}\text{C}$ Clamped inductive load; $L = 100\ \mu\text{H}$	$I_{CM} = 750$ $V_{CEK} \leq V_{CES}$				A	
t_{SC} (SCSOA)	$V_{CE} = 900\ \text{V}$; $V_{GE} = \pm 15\ \text{V}$; $R_G = 3.3\ \Omega$ $T_{VJ} = 125^{\circ}\text{C}$; non-repetitive; $V_{CEmax} \leq V_{CES}$	10				μs	
P_{tot}	$T_C = 25^{\circ}\text{C}$	2.1				kW	
Symbol	Conditions	Characteristic Values					
(T _{VJ} = 25°C, unless otherwise specified)							
		min.	typ.	max.			
$V_{CE(sat)}$	$I_C = 300\ \text{A}$; $V_{GE} = 15\ \text{V}$					V	
	$T_{VJ} = 25^{\circ}\text{C}$		2.0	2.4		V	
	$T_{VJ} = 125^{\circ}\text{C}$		2.2	2.7		V	
$V_{GE(th)}$	$I_C = 12\ \text{mA}$; $V_{GE} = V_{CE}$	4.5		6.5		V	
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0\ \text{V}$						
	$T_{VJ} = 25^{\circ}\text{C}$		0.4	1		mA	
	$T_{VJ} = 125^{\circ}\text{C}$		1	12		mA	
I_{GES}	$V_{CE} = 0\ \text{V}$; $V_{GE} = \pm 20\ \text{V}$			600		nA	
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^{\circ}\text{C}$ $V_{CE} = 600\ \text{V}$; $I_C = 300\ \text{A}$ $V_{GE} = \pm 15\ \text{V}$; $R_G = 3.3\ \Omega$		180			ns	
				100			ns
				650			ns
				120			ns
				19			mJ
				32			mJ
C_{ies}	$V_{CE} = 25\ \text{V}$; $V_{GE} = 0\ \text{V}$; $f = 1\ \text{MHz}$		22			nF	
Q_{Gon}	$V_{CE} = 600\ \text{V}$; $V_{GE} = 15\ \text{V}$; $I_C = 300\ \text{A}$		2.3			μC	
R_{thJC}				0.06		K/W	

Features

- NPT³ IGBT technology
- low saturation voltage
- low switching losses
- square RBSOA, no latch up
- high short circuit capability
- positive temperature coefficient for easy paralleling
- MOS input, voltage controlled
- ultra fast free wheeling diodes
- solderable pins for PCB mounting
- package with copper base plate

Advantages

- space savings
- reduced protection circuits
- package designed for wave soldering

Typical Applications

- AC motor control
- AC servo and robot drives
- power supplies

Diodes			
Symbol	Conditions	Maximum Ratings	
I_{F80}	$T_C = 80^\circ\text{C}$	300	A
I_{FRM}	$t_p = 1 \text{ ms}$	600	A
I^2t	$T_{VJ} = 125^\circ\text{C}; t = 10 \text{ ms}; V_R = 0 \text{ V}$	21400	A ² s

Symbol	Conditions	Characteristic Values			
		(T _{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
V _F	I _F = 300 A; V _{GE} = 0 V; T _{VJ} = 25°C			2.1	V
I _{RM}	I _F = 300 A; di _F /dt = 2700 A/μs; T _{VJ} = 125°C; V _R = 800 V		240		A
R _{thJC}			0.11		K/W


Temperature Sensor NTC				
Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R ₂₅	T = 25°C	4.75	5.0	5.25
B _{25/50}			3375	

Module			
Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-40...+125	°C
T_{JM}		+150	°C
T_{stg}		-40...+125	°C
V_{ISO}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	3400	V~
M_d	Mounting torque (M5)	3 - 6	Nm
	Terminal connection torque (M6)	3 - 6	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{therm-chip}^{*)}$	Resistance terminal to chip		0.55	
d_S	Creepage distance on surface	12.7		
d_A	Strike distance in air	10		
R_{thCH}	with heatsink compound		0.01	
Weight			900	

*) $V = V_{CEsat} + 2x R_{therm-chip} \cdot I_C$ resp. $V = V_F + 2x R \cdot I_F$

Dimensions in mm (1 mm = 0.0394")

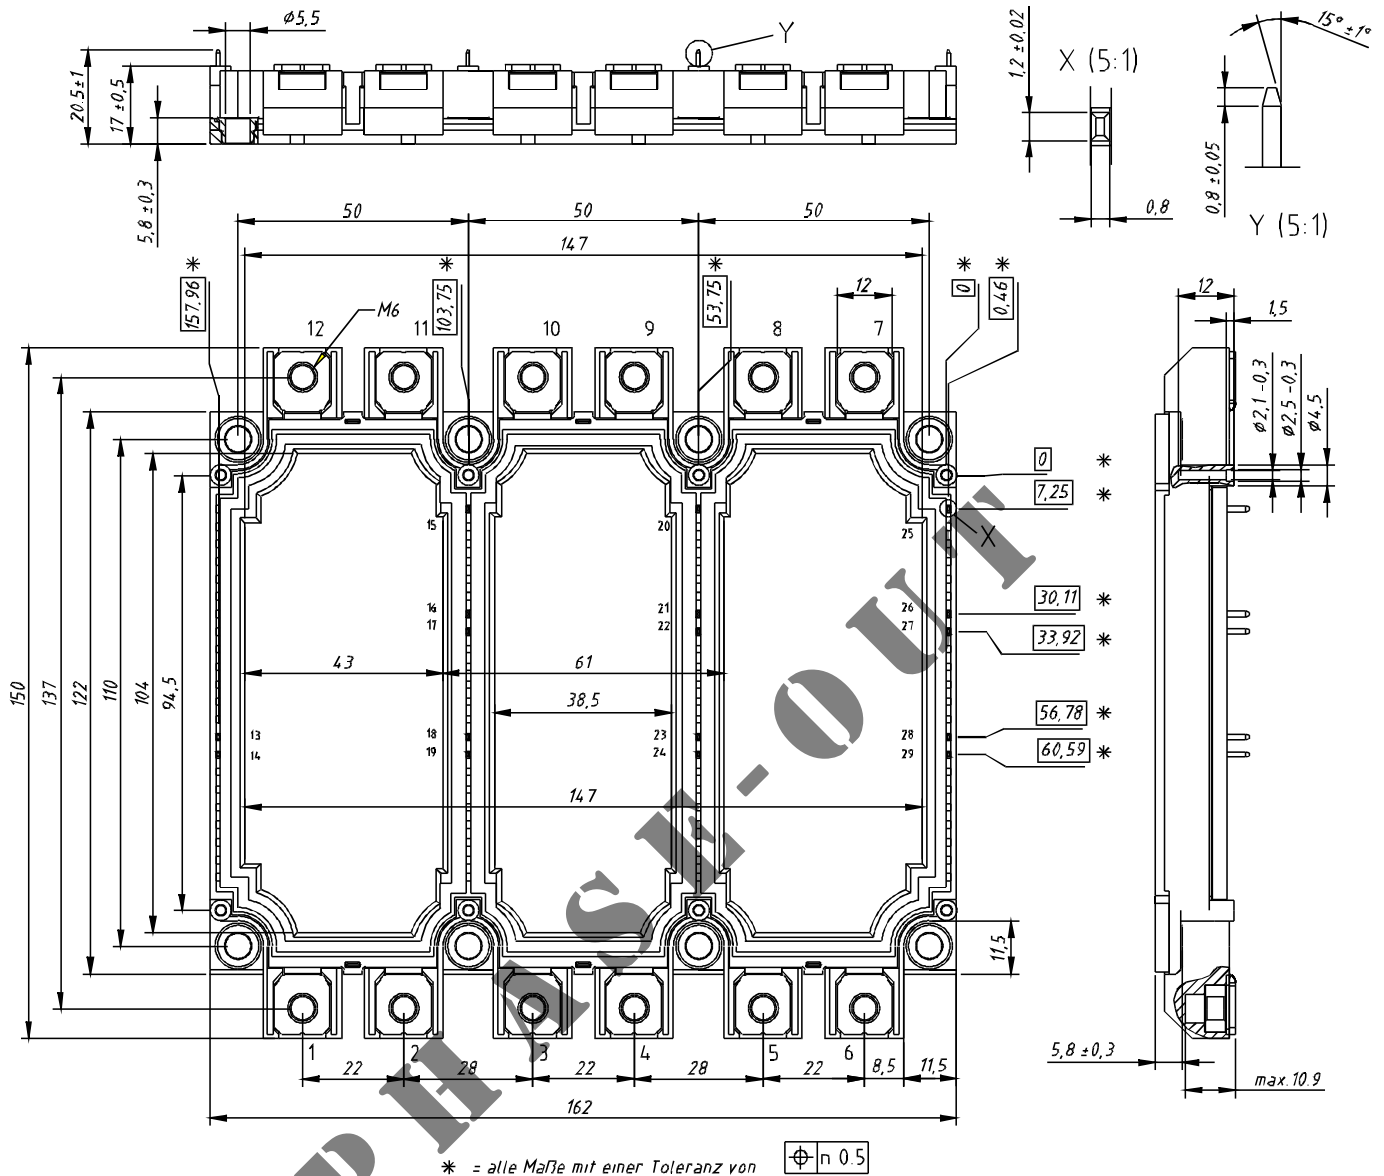

Diode		IGBT	
R_i	τ_i	R_i	τ_i
$2.884 \cdot 10^{-5}$	$1 \cdot 10^{-5}$	$2.344 \cdot 10^{-5}$	$1 \cdot 10^{-5}$
$1.523 \cdot 10^{-3}$	$5 \cdot 10^{-5}$	$5.97 \cdot 10^{-4}$	$5 \cdot 10^{-5}$
$7.617 \cdot 10^{-3}$	0.012	$5.97 \cdot 10^{-3}$	0.015
0.03	0.078	0.023	0.075
0.036	0.82	0.028	0.69

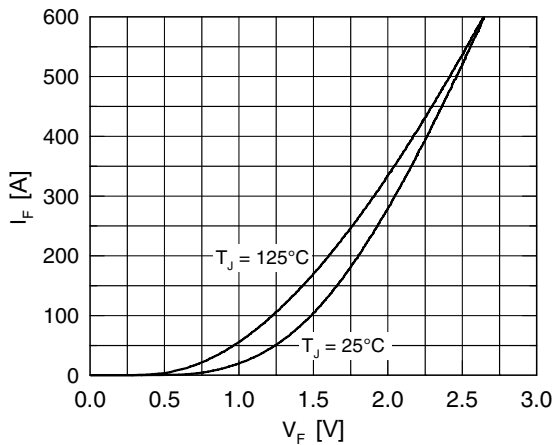


Fig. 1 Typ. forward characteristics of free wheeling diode

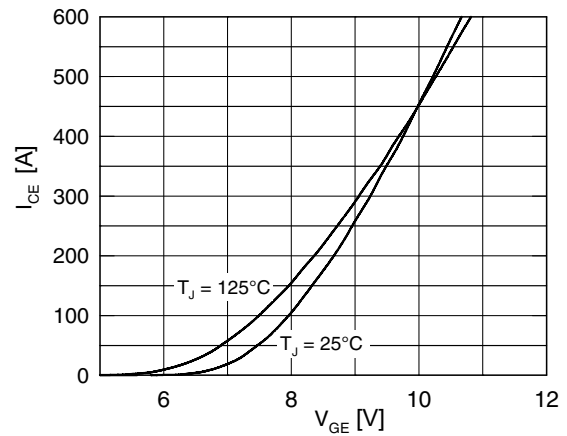


Fig. 2 Typ. transfer characteristics

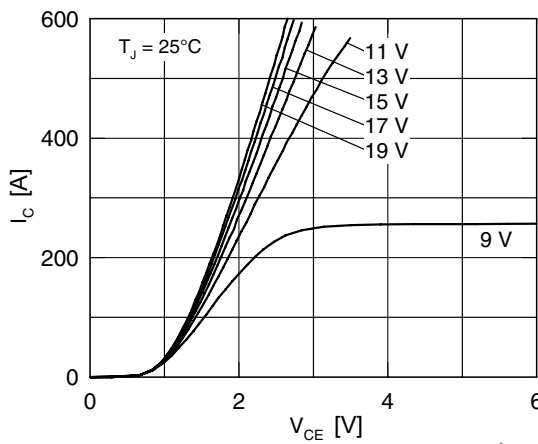


Fig. 3 Typ. output characteristics

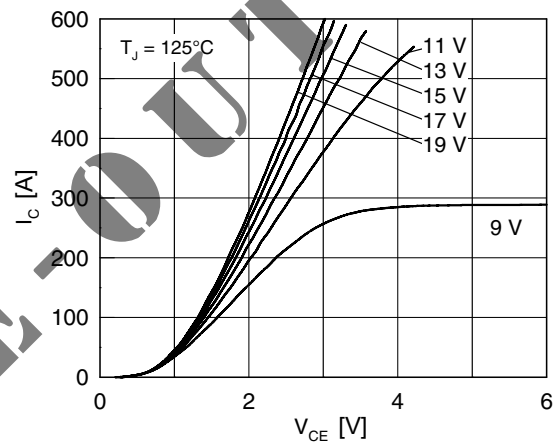


Fig. 4 Typ. output characteristics

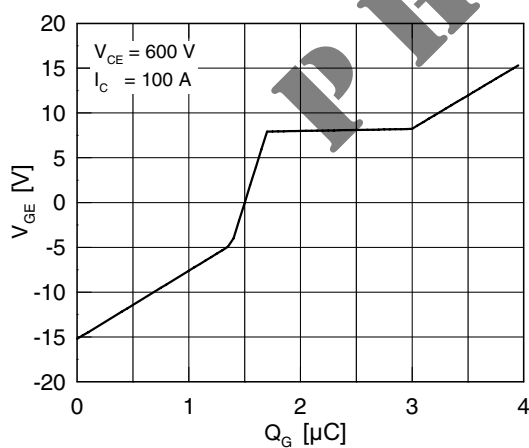


Fig. 5 Typ. turn on gate charge

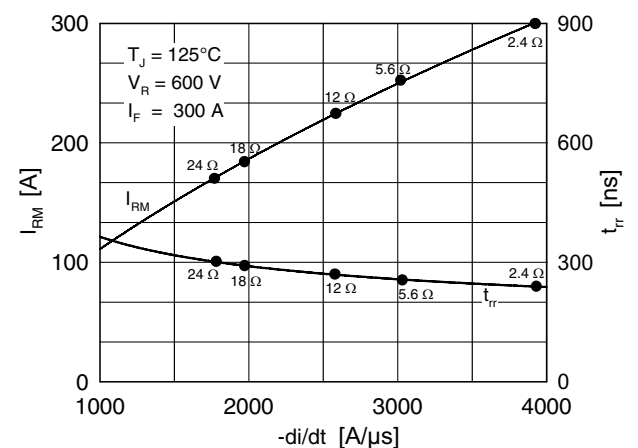


Fig. 6 Typ. turn off characteristics of free wheeling diode

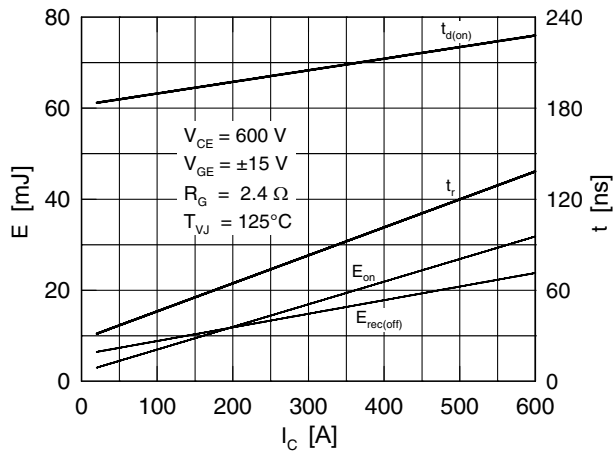


Fig. 7 Typ. turn on energy and switching times versus collector current

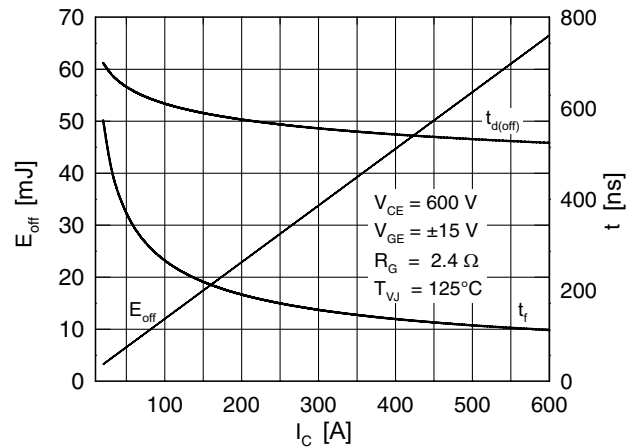


Fig. 8 Typ. turn off energy and switching times versus collector current

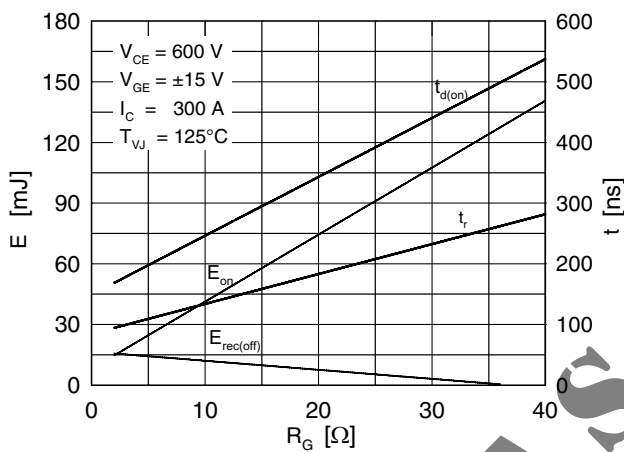


Fig. 9 Typ. turn on energy and switching times versus gate resistor

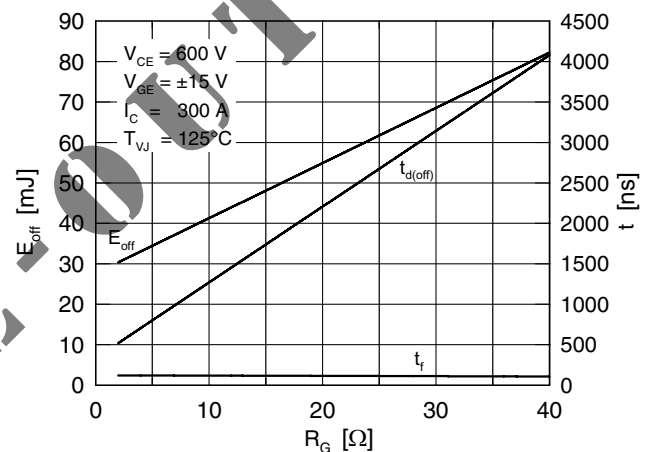


Fig. 10 Typ. turn off energy and switching times versus gate resistor

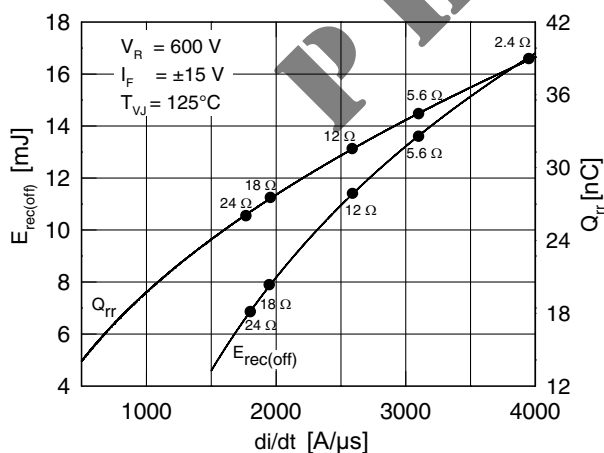


Fig. 11 Typ. turn off energy and recovered charge of free wheeling diode

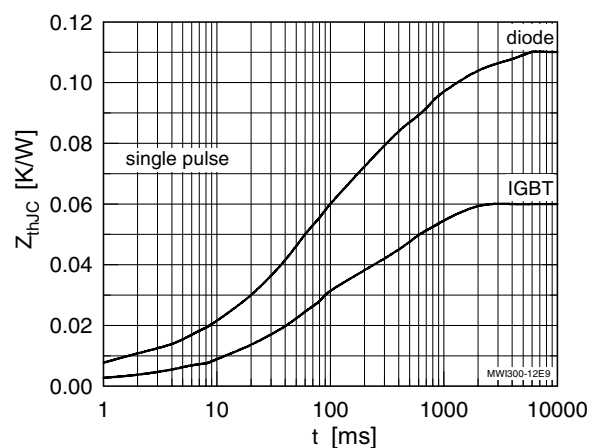


Fig. 12 Typ. transient thermal impedance