

FEATURES

- 170ns maximum settling time to $\pm 0.1\%$
- 225ns maximum settling time to $\pm 0.01\%$
- 400ns maximum settling time to $\pm 0.003\%$
- 8 Channels single-ended inputs
- 395mW power dissipation
- Small, 24-pin DDIP package

PRODUCT OVERVIEW


The MX-826 is a precision, high-speed multiplexer characterized for 10, 12 and 14-bit applications. The performance benchmarks are its 225 nanoseconds maximum settling time to $\pm 0.01\%$ accuracy and its unprecedented specification of accuracy to $\pm 0.003\%$.

The MX-826 provides eight single-ended inputs. Channel addressing is done by a three-bit binary code

and break-before-make switching assures that no two channels are ever momentarily shorted together.

The MX-826 operates from $\pm 15V$ and $+5V$ power supplies. Models are available in two operating temperature ranges: 0 to $+70^{\circ}C$ and -55 to $+125^{\circ}C$. MIL-STD-883 screening is optional.

FUNCTIONAL BLOCK DIAGRAM

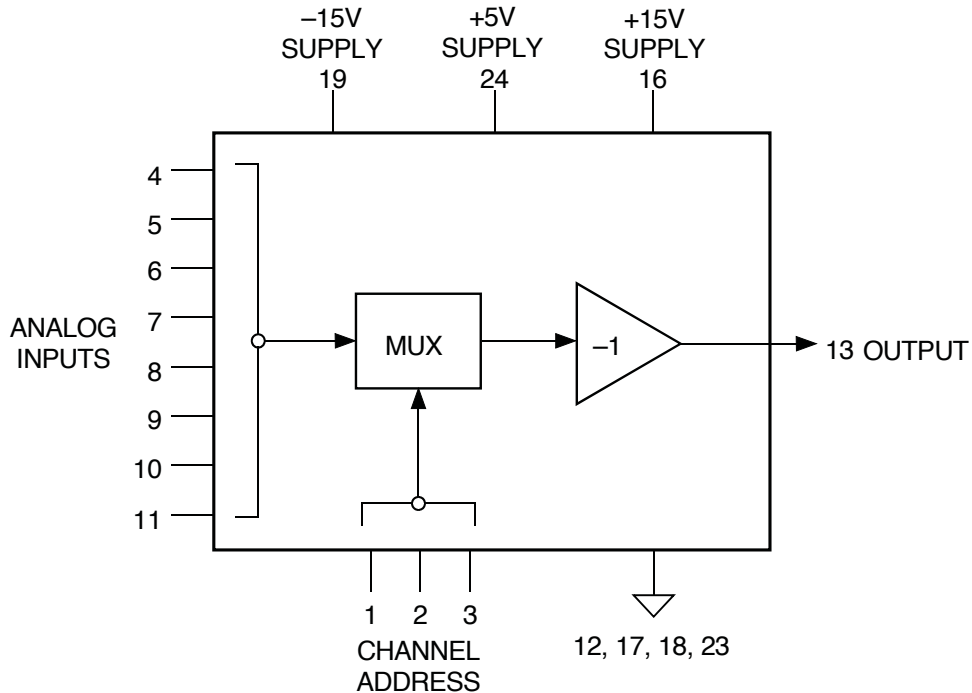

ABSOLUTE MAXIMUM RATINGS

Parameters	Limits	Units
+15V Supply (Pin 16)	0 to +18	Volts
-15V Supply (Pin 19)	0 to -18	Volts
+5V Supply (Pin 24)	-0.5 to +7	Volts
Digital Input (Pin 1, 2, 3)	-0.3 to +5.5	Volts
Analog Input (Pin 4-11)	-15 to +15	Volts
Lead Temperature (10s)	300	°C
Short Circuit to Ground (Pin 13)	Continuous	

FUNCTIONAL SPECIFICATIONS

(Apply over the operating temperature range and over the operating power supply range unless otherwise specified.)

Input	Min.	Typ.	Max.	Units
Input Voltage Range	-10		+10	Volts
Digital Input, Logic Levels				
Logic 1	+2.0	-	-	Volts
Logic 0	-	-	+0.8	Volts
Logic Loading				
Logic 1	-	-	+10	uA
Logic 0	-	-	-10	uA
Outputs				
Output Range	-10.0		+10	Volts
Output Current	15	-	-	mA
Stable Capacitive Load	100	-	-	pF
Output Impedance DC	-	0.1	-	Ω
Performance				
Gain	-	-1	-	V/V
Gain Error, 25°C	-	-	±0.03	%FS
Gain Tempco, -55 to +125°C	-	±0.5	±5	ppm/°C
Offset, 25°C	-	±0.1	±0.5	mV
Offset Voltage Drift	-	<5	±15	μV/°C
Slew Rate	±250	±300	-	V/μs
Cross Talk				
100kHz	-	-90	-83	dB
1MHz	-	-80	-75	dB
Bandwidth				
3dB Small Signal	8	8.5	-	MHz
Full Power	3	4.5	-	MHz
Input Impedance	2.45	2.5	2.55	kΩ
Output Settling Time				
(10V step, +25°C) 500Ω Load				
±0.1% 10 Bits	-	100	170	ns
±0.01% 12 Bits	-	150	225	ns
±0.003% 14 Bits	-	300	400	ns
(20V step, +25°C) 1kΩ Load				
±0.1% 10 Bits	-	150	200	ns
±0.01% 12 Bits	-	200	300	ns
±0.003% 14 Bits	-	600	720	ns

Switching Characteristics				
Break-Before-Make Delay	8	15	25	ns
Turn On Time	-	20	50	ns
Turn Off Time	-	20	50	ns
Performance				
Harmonic Distortion				
DC to 500kHz, 10Vp-p	-	-90	-80	dB
Signal-to-Noise Ratio				
With Distortion	-	72	69	dB
Without Distortion	-	80	75	dB
Power Requirements				
Range				
+15V Supply	+14.5	+15	+15.5	Volts
-15V Supply	-14.5	-15	-15.5	Volts
+5V Supply	+4.75	+5	+5.25	Volts
Current (Quiescent)				
+15V Supply	-	+13	+21	mA
-15V Supply	-	-13	-21	mA
+5V Supply	-	<1	+1	mA
Power Supply Rejection Ratio	82	-	-	dB
Power Dissipation	-	395	575	mW
Physical Environmental				
Operating Temp. Range, case				
MC Model	0	-	+70	°C
MM Model	-55	-	+125	°C
Storage Temp. Range	-65	-	+150	°C
Package Type	24-Pin, Metal-Sealed, Ceramic DDIP			
Weight	0.42 oz. (12 grams)			



Table 1. Channel Addressing

On	Mux Address		
Channel	A2	A1	A0
1	0	0	0
2	0	0	1
3	0	1	0
4	0	1	1
5	1	0	0
6	1	0	1
7	1	1	0
8	1	1	1

TECHNICAL NOTES

1. Bypass the ±15V and +5V power supplies with a 1μF, 25V tantalum electrolytic capacitors in parallel with a 0.1μF ceramic capacitors.
2. Analog signals up to ±15V may be present while the MUX power supplies are off.
3. The absence of an RON specification or output leakage specification is related to the architecture of the switching network. The inputs see a constant 2.5k Ohm input impedance whether the channel is on or off.
4. Typical recovery time from an overvoltage condition of >±3V is approximately 200 nanoseconds from a negative overdrive and 700 nanoseconds from a positive overdrive.
5. Double-level multiplexing may be used to provide up to 64 channels (nine MX-826s required).

MECHANICAL DIMENSIONS

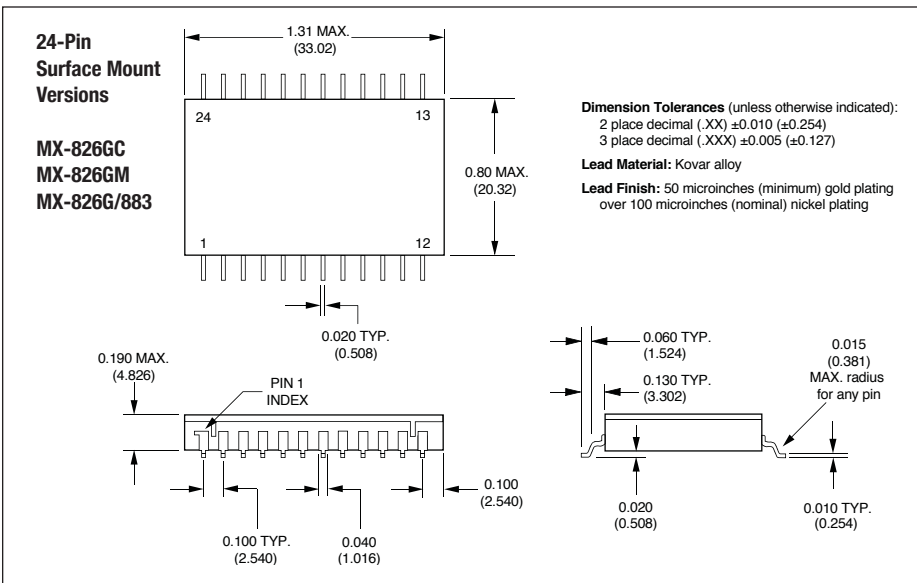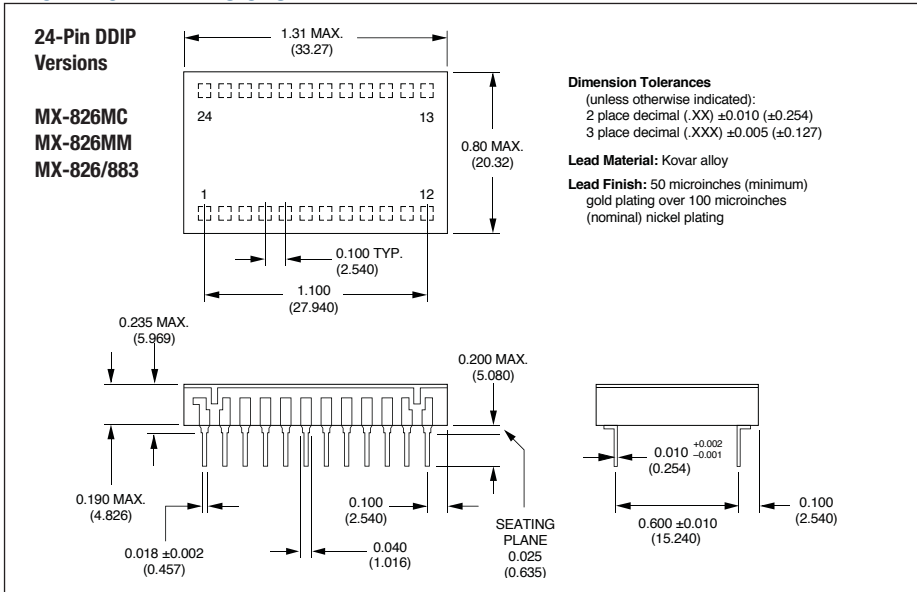

INPUT/OUTPUT CONNECTIONS

PIN	FUNCTION	PIN	FUNCTION
1	A0	24	+5V SUPPLY
2	A1	23	GROUND
3	A2	22	NO CONNECTION
4	IN1	21	NO CONNECTION
5	IN2	20	NO CONNECTION
6	IN3	19	-15V SUPPLY
7	IN4	18	GROUND
8	IN5	17	GROUND
9	IN6	16	+15V SUPPLY
10	IN7	15	NO CONNECTION
11	IN8	14	NO CONNECTION
12	GROUND	13	OUTPUT

ORDERING INFORMATION

Model Number	Operating Temp. Range	Package	RoHS
MX-826MC	0 to +70°C	DDIP	No
MX-826ME	-40 to +100°C	DDIP	No
MX-826MM	-55 to +125°C	DDIP	No
MX-826GC	0 to +70°C	SMT	No
MX-826GE	-40 to +100°C	SMT	No
MX-826GM	-55 to +125°C	SMT	No
MX-826/883	-55 to +125°C	DDIP	No
MX-826G/883	-55 to +125°C	SMT	No
5962-9450601HXC	-55 to +125°C	DDIP	No
5962-9450601HXA	-55 to +125°C	DDIP	No
MX-826MC-C	0 to +70°C	DDIP	Yes
MX-826ME-C	-40 to +100°C	DDIP	Yes
MX-826MM-C	-55 to +125°C	DDIP	Yes
MX-826GC-C	0 to +70°C	SMT	Yes
MX-826GE-C	-40 to +100°C	SMT	Yes
MX-826GM-C	-55 to +125°C	SMT	Yes

DESC drawing available: Drawing Number 5962-9450601. For MIL-STD-883 product specification, contact DATEL.