
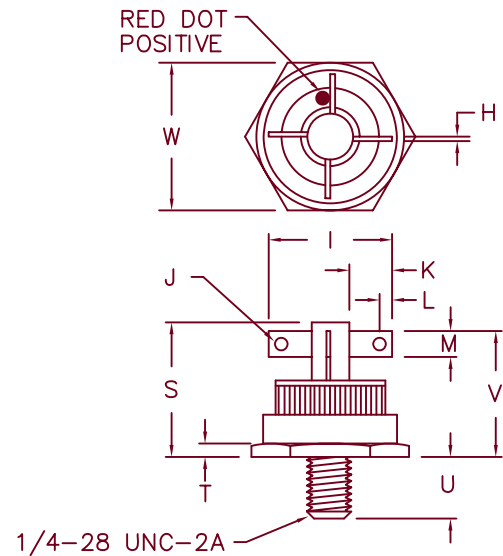
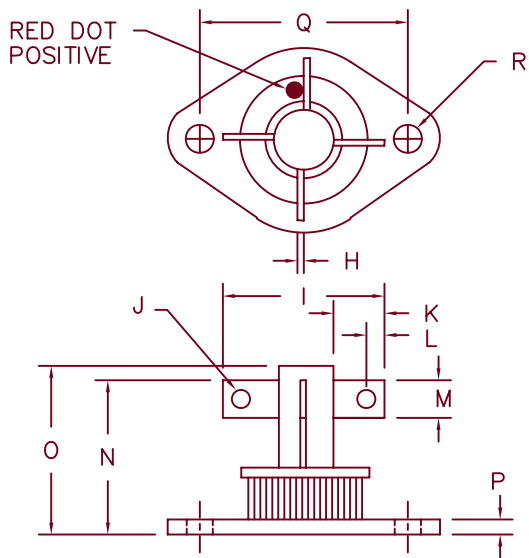
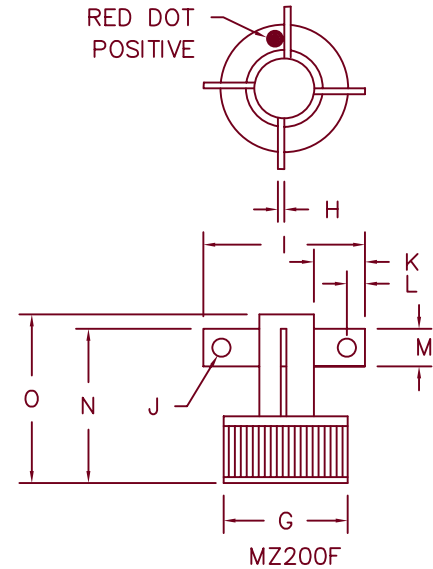



Three Phase 12 Amp Bridge Rectifier MZ200 — MZ1200

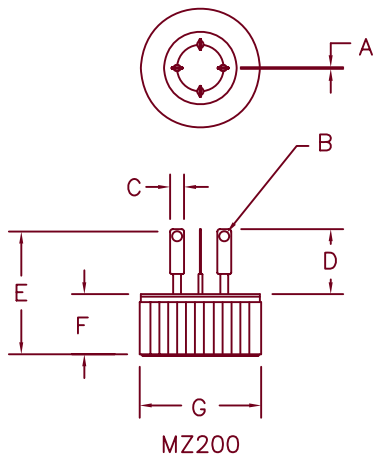

MZ200FT — For Parts w/o Flag Delete F — MZ200FS

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.018	.028	0.46	0.71	
B	---	.070 typ.	---	---	Dia.
C	---	.125 typ.	---	---	
D	.290	.330	7.37	8.38	
E	---	.825	---	20.95	
F	.390	.420	9.90	10.67	
G	.751	.755	19.07	19.18	
H	---	.032 typ.	---	---	
I	---	1.0	---	25.4	
J	---	.11 typ.	---	---	Dia.
K	.250	---	6.35	---	

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
L	---	.125 Typ.	---	---	
M	---	.187 Typ.	---	---	
N	---	.830	---	21.08	
O	---	.930	---	23.62	
P	---	.135	---	3.43	
Q	1.177	1.197	29.90	30.40	
R	.151	.161	3.84	4.10	Dia.
S	---	1.20	---	30.48	
T	---	.125 typ.	---	---	
U	.340	.400	8.64	10.16	
V	---	1.10	---	27.94	
W	---	.875	---	22.83	



6 Lake Street
Lawrence, MA 01841
PH: (978) 620-2600
FAX: (978) 689-0803
www.microsemi.com

05-01-07 Rev. 2

MZ200 — MZ1200

Microsemi Catalog Number

MZ200
MZ400
MZ600
MZ800
MZ1000
MZ1200

Repetitive Peak Reverse Voltage

200V
400V
600V
800V
1000V
1200V

- Glass Passivated Die
- Hermetically sealed
- Soft Recovery
- 200°C Junction temperature

Electrical Characteristics

DC forward current output

Maximum Surge Current

Maximum I^2t For Fusing

Max. Peak Forward Voltage per leg

Max. Peak Reverse Current per leg

Max. Peak Reverse Current per leg

I_o 12A

I_{FSM} 100 Amps

I^2t 42A²s

V_{FM} 1.2 Volts

I_{RM} 5 μ A

I_{RM} 1.0 mA

$T_C = 110^\circ\text{C}$, $R_{\theta JC} = 2.5^\circ\text{C/W}$
8.3mS, half sine, $T_C = 110^\circ\text{C}$

$I_{FM} = 10\text{A}$; $T_J = 25^\circ\text{C}$

V_{RM} rated, $T_J = 25^\circ\text{C}$

V_{RM} rated, $T_J = 150^\circ\text{C}$

Thermal and Mechanical Characteristics

Storage temperature range

Operating junction temperature range

Max thermal resistance per package

T_{STG}

T_{OP}

$R_{\theta JC}$

-65°C to $+200^\circ\text{C}$

-65°C to $+200^\circ\text{C}$

2.5°C/W

MZ200 – MZ1200

Figure 1
Maximum Forward Characteristics – Per Leg

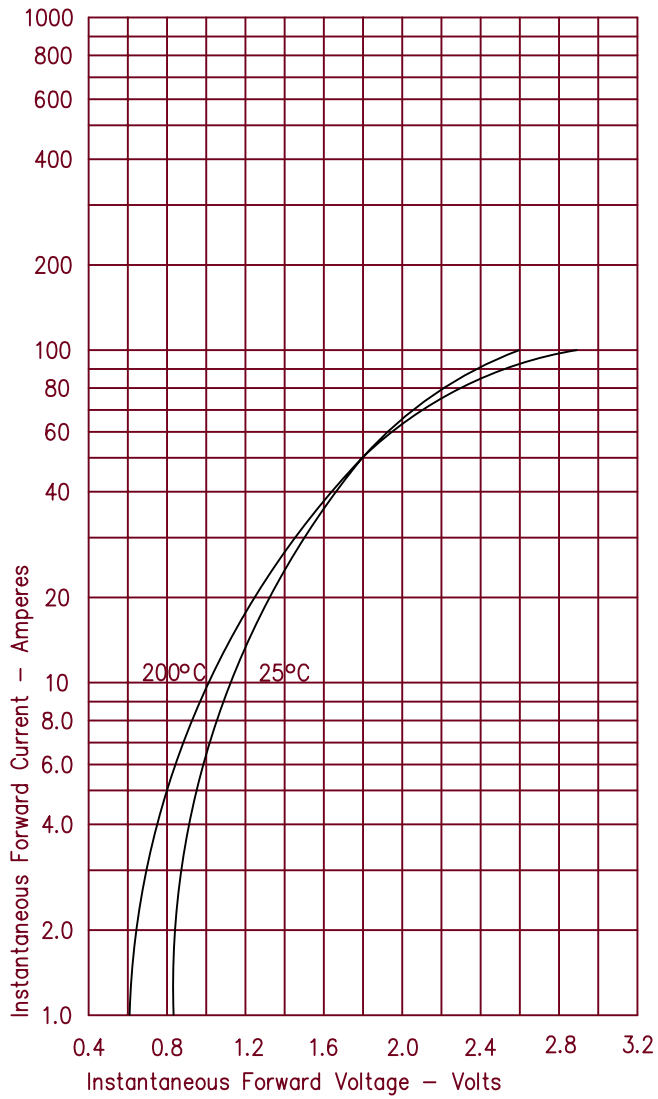


Figure 3
Forward Current Derating – Per Leg

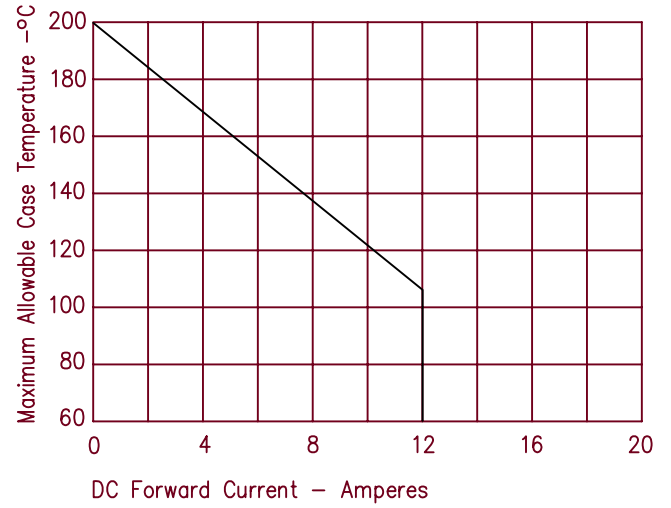


Figure 2
Typical Reverse Characteristics – Per Leg

