

Surface Mount Aluminum Electrolytic Capacitors NAZH Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- REDUCED SIZE
- SUIT FOR HIGH TEMPERATURE REFLOW SOLDERING (UP TO 260°C)
- 2,000 HOUR LOAD LIFE @ +105°C
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING

SAC Alloy Compatible
260°C



RoHS

Compliant

includes all homogeneous materials

CHARACTERISTICS

Rated Voltage Rating	6.3 ~ 50Vdc						
Rated Capacitance Range	10 ~ 2,200µF						
Operating Temp. Range	-55 ~ +105°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Miuntes @ 20°C	0.01CV or 3µA whichever is greater						
Tan δ @ 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50
	S.V. (Vdc)	8.0	13	20	32	44	63
	Tan δ @ 120Hz/20°C	0.26	0.19	0.16	0.14	0.12	0.10
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	2222	222				
	Z-40°C/Z+20°C	3333	333				
Load Life Test @ 105°C All Case Sizes = 2,000 hours	Capacitance Change	Within ±30% of initial measured value					
	Tan δ	Less than ±200% of the specified maximum value					
	Leakage Current	Less than the specified maximum value					


*See Part Number System for Details

STANDARD VALUES AND CASE SIZES (mm)

Cap. (µF)	Code	Working Voltage (Vdc)					
		6.3	10	16	25	35	50
10	100	-	-	-	-	-	(4x6.1) 5x6.1
22	220	-	-	-	4x6.1	4x6.1	5x6.1
33	330	-	-	-	4x6.1	5x6.1	-
47	470	-	-	4x6.1	5x6.1	5x6.1	6.3x6.1
68	680	-	4x6.1	5x6.1	5x6.1	6.3x6.1	-
100	101	4x6.1	-	5x6.1	6.3x6.1	6.3x6.1	6.3x8
150	151	-	5x6.1	6.3x6.1	6.3x8	6.3x8	-
220	221	5x6.1	6.3x6.1	6.3x6.1	6.3x8	-	8x10.5
330	331	6.3x6.1	6.3x8	6.3x8	-	8x10.5	10x10.5
470	471	6.3x8	6.3x8	-	8x10.5	-	-
560	561	-	-	-	-	10x10.5	-
680	681	6.3x8	-	8x10.5	-	-	-
820	821	-	-	-	8x10.5	-	-
1000	102	-	8x10.5	10x10.5	-	-	-
1500	152	8x10.5	10x10.5	----	-	-	-
2200	222	10x10.5	-	----	-	-	-

() In Development

PART NUMBER SYSTEM

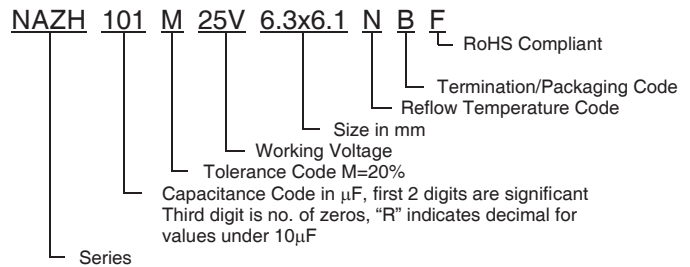

PEAK REFLOW TEMPERATURE CODES



Code	Peak Reflow Temperature
N	260°C

TERMINATION FINISH & PACKAGING OPTIONS CODES

Code	Finish & Reel Size
B	Sn-Bi Finish & 13" Reel
S	100% Sn Finish & 13" Reel

DIMENSIONS (mm) AND 13" REEL QUANTITIES

Case Size	φD±0.5	L max.	A±0.2	B±0.2	I±0.3	W	P±0.3	Qty/Reel
4x6.1	4.0	6.1	4.3	4.3	1.8	0.5~0.8	1.0	1,200
5x6.1	5.0	6.1	5.3	5.3	2.2	0.5~0.8	1.5	800
6.3x6.1	6.3	6.1	6.6	6.6	2.6	0.5~0.8	1.8	800
6.3x8	6.3	8	6.6	6.6	2.6	0.5~0.8	1.8	500
8x10.5	8.0	10.5	8.3	8.3	3.4	0.7~1.1	3.1	300
10x10.5	10.0	10.5	10.3	10.3	3.5	0.7~1.1	4.6	300

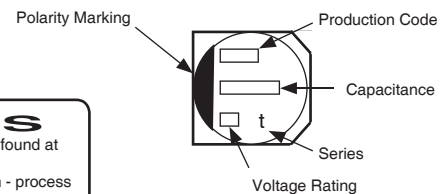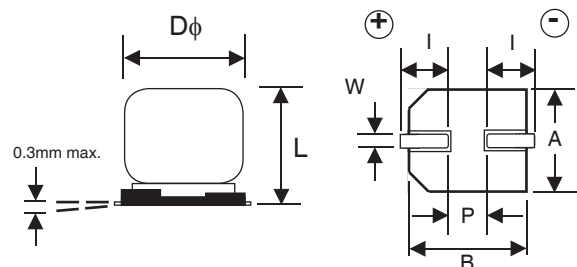

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at www.niccomp.com/precautions
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



Surface Mount Aluminum Electrolytic Capacitors NAZH Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. ESR (Ω) +20°C/100KHz	Max. Ripple Current (mA) +105°C/100KHz	Load Life Hours @ +105°C
NAZH101M6.3V4X6.1NBF 100	6.3	6.3	0.26	0.85	160	2,000
NAZH221M6.3V5X6.1NBF 220			0.26	0.36	240	2,000
NAZH331M6.3V6.3X6.1NBF 330			0.26	0.26	300	2,000
NAZH471M6.3V6.3X8NBF 470			0.26	0.16	600	2,000
NAZH681M6.3V6.3X8NBF 680			0.26	0.16	600	2,000
NAZH152M6.3V8X10.5NBF 1500			0.26	0.08	850	2,000
NAZH222M6.3V10X10.5NBF 2200			0.28	0.06	1190	2,000
NAZH680M10V4X6.1NBF 68			10	10	0.19	0.85
NAZH151M10V5X6.1NBF 150	0.19	0.36			240	2,000
NAZH221M10V6.3X6.1NBF 220	0.19	0.26			300	2,000
NAZH331M10V6.3X8NBF 330	0.19	0.16			600	2,000
NAZH471M10V6.3X8NBF 470	0.19	0.16			600	2,000
NAZH102M10V8X10.5NBF 1000	0.19	0.08			850	2,000
NAZH152M10V10X10.5NBF 1500	0.19	0.06			1190	2,000
NAZH470M16V4X6.1NBF 47	16	16			0.16	0.85
NAZH680M16V5X6.1NBF 68			0.16	0.36	240	2,000
NAZH101M16V5X6.1NBF 100			0.16	0.36	240	2,000
NAZH151M16V6.3X6.1NBF 150			0.16	0.26	300	2,000
NAZH221M16V6.3X6.1NBF 220			0.16	0.26	300	2,000
NAZH331M16V6.3X8NBF 330			0.16	0.16	600	2,000
NAZH681M16V8X10.5NBF 680			0.16	0.08	850	2,000
NAZH102M16V10X10.5NBF 1000			0.16	0.06	1190	2,000
NAZH220M25V4X6.1NBF 22	25	25	0.14	0.85	160	2,000
NAZH330M25V4X6.1NBF 33			0.14	0.85	160	2,000
NAZH470M25V5X6.1NBF 47			0.14	0.36	240	2,000
NAZH680M25V5X6.1NBF 68			0.14	0.36	240	2,000
NAZH101M25V6.3X6.1NBF 100			0.14	0.26	300	2,000
NAZH151M25V6.3X8NBF 150			0.14	0.16	600	2,000
NAZH221M25V6.3X8NBF 220			0.14	0.16	600	2,000
NAZH471M25V8X10.5NBF 470			0.14	0.08	850	2,000
NAZH821M25V10X10.5NBF 820			0.14	0.06	1190	2,000
NAZH220M35V4X6.1NBF 22			35	35	0.12	0.85
NAZH330M35V5X6.1NBF 33	0.12	0.36			240	2,000
NAZH470M35V5X6.1NBF 47	0.12	0.36			240	2,000
NAZH680M35V6.3X6.1NBF 68	0.12	0.26			300	2,000
NAZH101M35V6.3X6.1NBF 100	0.12	0.26			300	2,000
NAZH151M35V6.3X8NBF 150	0.12	0.16			600	2,000
NAZH331M35V8X10.5NBF 330	0.12	0.08			850	2,000
NAZH561M35V10X10.5NBF 560	0.12	0.06			1190	2,000
(NAZH100M50V4X6.1NBF) 10	50	50	0.1	2.3	85	2,000
NAZH100M50V5X6.1NBF 10			0.1	0.88	165	2,000
NAZH220M50V5X6.1NBF 22			0.1	0.88	165	2,000
NAZH470M50V6.3X6.1NBF 47			0.1	0.68	195	2,000
NAZH101M50V6.3X8NBF 100			0.1	0.34	350	2,000
NAZH221M50V8X10.5NBF 220			0.1	0.18	670	2,000
NAZH331M50V10X10.5NBF 330			0.1	0.12	900	2,000

() In Development

RIPPLE CURRENT FREQUENCY CORRECTION FACTORS



Frequency	120Hz	500Hz	1KHz	10KHz
10 ~ 470μF	0.65	0.85	0.95	1.00
560 ~ 2200μF	0.70	0.90	0.95	1.00



Surface Mount Aluminum Electrolytic Capacitors NAZH Series

RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
4x6.1	1.0	2.5	1.6
5x6.1	1.5	2.8	1.6
6x3x6.1	1.8	3.2	1.6
6.3x8	1.8	3.2	1.6
8x10.5	3.1	4.0	2.0
10x10.5	4.6	4.1	2.0

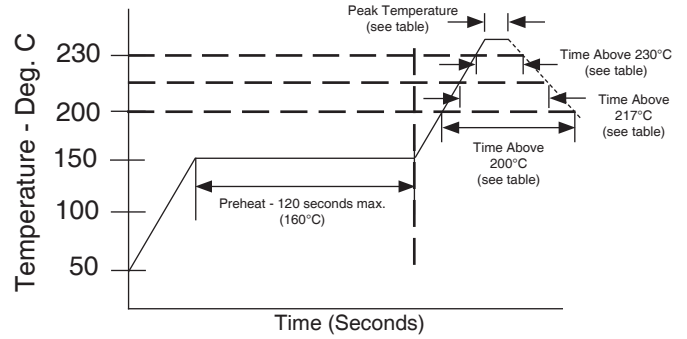

Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.niccomp.com/RSL

PEAK REFLOW TEMPERATURE AND DURATION

Diameter	Peak Temperature	Duration	Time $\geq 230^{\circ}\text{C}$	Time $\geq 217^{\circ}\text{C}$	Time $\geq 200^{\circ}\text{C}$	Number of Reflow Passes*
4 ~ 6.3mm ϕ	260°C	Time $\geq 250^{\circ}\text{C}$, 5 sec.	30 sec.	40 sec.	70 sec.	2
	255°C	Time $\geq 250^{\circ}\text{C}$, 10 sec.				1
8 ~ 10mm ϕ	260°C	Time $\geq 250^{\circ}\text{C}$, 5 sec.	30 sec.	40 sec.	70 sec.	1
	245°C	Time $\geq 240^{\circ}\text{C}$, 10 sec.				2

*Second reflow shall be at least one hour after natural cool to room temperature.


RESISTANCE TO SOLDERING HEAT

Resistance to Soldering Heat	After reflow soldering the capacitor shall be stabilized at room temperature prior to measuring.	
	Capacitance Change	Within $\pm 10\%$ of initial measured value
	Tan δ	Less than initial measured value
	Leakage Current	Less than initial measured value
	Appearance	No significant change can be observed

CARRIER TAPE DIMENSIONS

Case Size	A ± 0.2	B $^{+0.3}/_{-0.2}$	C ± 0.3	D ± 0.1	P ± 0.1	T ± 0.2	t ± 0.1
4x6.1	4.7	4.6 $^{+0.2}/_{-0.1}$	12.0	5.5	8.0	6.2	0.4
5x6.1	5.7	5.7	12.0	5.5	12.0	6.4	0.4
6.3x6.1	7.0	7.0	16.0	7.5	12.0	6.4	0.4
6.3x8	7.0	7.0	16.0	7.5	12.0	8.4	0.4
8x10.5	8.7	8.7	24.0	11.5	16.0	11.0	0.4
10x10.5	10.7	10.7	24.0	11.5	16.0	11.0	0.4

1. Leader and trailer will have a minimum of 10 empty pockets and 20cm of extended cover tape.
2. A maximum of 3 connections (splices) per reel.

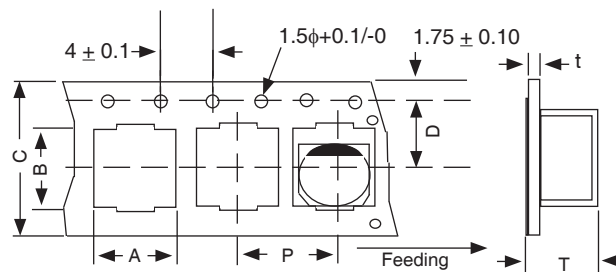

Surface Mount Aluminum Electrolytic Capacitors NAZH Series

REEL DIMENSIONS & REEL QTY

Case Size	W ±1.0	Reel Quantity TR 13" (330mm)
4x6.1	14	1,200
5x6.1	14	800
6.3x6.1	18	800
6.3x8	18	500
8x10.5	26	300
10x10.5	26	300

