

# Surface Mount Aluminum Electrolytic Capacitors NAZU Series

## FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- LOW IMPEDANCE AT 100KHZ
- EXTENDED LOAD LIFE (3,000 @ +105°C)
- DESIGNED FOR 260°C REFLOW SOLDERING

**RoHS  
Compliant**  
includes all homogeneous materials



## CHARACTERISTICS

Rated Voltage Rating	6.3 ~ 50Vdc						
Rated Capacitance Range	10 ~ 330μF						
Operating Temp. Range	-40 ~ +105°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater						
Tan δ @ 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50
	S.V. (Vdc)	8.0	13	20	32	44	63
	Tan δ	0.28	0.24	0.22	0.16	0.13	0.12
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	4	3	2	2	2	2
	Z-40°C/Z+20°C	10	7	5	3	3	3
Load Life Test @ 105°C at Rated Working Voltage 3,000 hrs	Capacitance Change	Within ±30% of initial measured value					
	Tan δ	Less than ±300% of the specified maximum value					
	Leakage Current	Less than the specified maximum value					



**LOW ESR COMPONENT**  
LIQUID ELECTROLYTE  
For Performance Data see [www.LowESR.com](http://www.LowESR.com)

\*See Part Number System for Details

## STANDARD VALUES AND CASE SIZES (mm)

Cap (μF)	Code	Working Voltage (Vdc)					
		6.3	10	16	25	35	50
10	100	-	-	-	-	5x6.3	6.3x6.3
22	220	-	-	5x6.3	5x6.3	6.3x6.3	6.3x6.3
33	330	-	5x6.3	-	6.3x6.3	-	6.3x8
47	470	5x6.3	-	6.3x6.3	6.3x6.3	6.3x8	-
100	101	6.3x6.3	-	6.3x6.3	6.3x8	-	-
150	151	-	6.3x6.3	6.3x8	-	-	-
220	221	6.3x8	-	6.3x8	-	-	-
330	331	6.3x8	-	-	-	-	-

## PART NUMBER SYSTEM

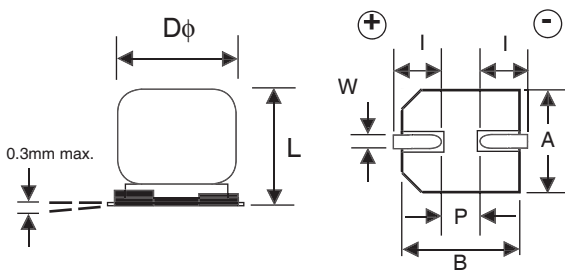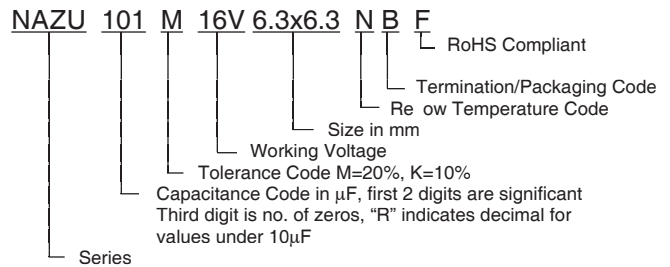

## PEAK REFLOW TEMPERATURE CODES

Code	Peak Reflow Temperature
N	260°C
L	250°C
J	240°C
H	235°C

## DIMENSIONS (mm) AND REEL QUANTITIES

Case Size	φD±0.5	L max.	A±0.2	B±0.2	I±0.3	W	P±0.3	Qty/Reel
5x6.3	5.0	6.3	5.3	5.3	2.2	0.5~0.8	1.4	800
6.3x6.3	6.3	6.3	6.6	6.6	2.5	0.5~0.8	2.2	800
6.3x8	6.3	8.0	6.6	6.6	2.5	0.5~0.8	2.2	500

## TERMINATION FINISH & PACKAGING OPTIONS CODES

Code	Finish & Reel Size
B	Sn-Bi Finish & 13" Reel
LB	Sn-Bi Finish & 15" Reel
S	100% Sn Finish & 13" Reel
LS	100% Sn Finish & 15" Reel

## PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.  
Also found at [www.niccomp.com/precautions](http://www.niccomp.com/precautions)  
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: [tpmg@niccomp.com](mailto:tpmg@niccomp.com)



## STANDARD VALUES, CASE SIZES AND SPECIFICATIONS


NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Impedance (Ω) +20°C, 100KHz	Max. Ripple Current (mA) +105°C, 100KHz	Load Life Hours @ +105°C
NAZU470M6.3V5X6.3NBF	47	6.3	0.28	1.30	95	3,000
NAZU101M6.3V6.3X6.3NBF	100		0.28	0.70	140	3,000
NAZU221M6.3V6.3X8NBF	220		0.28	0.60	230	3,000
NAZU331M6.3V6.3X8NBF	330		0.28	0.60	230	3,000
NAZU330M10V5X6.3NBF	33	10	0.24	1.30	95	3,000
NAZU151M10V6.3X6.3NBF	150		0.24	0.70	140	3,000
NAZU220M16V5X6.3NBF	22	16	0.22	1.30	95	3,000
NAZU470M16V6.3X6.3NBF	47		0.22	0.70	140	3,000
NAZU101M16V6.3X6.3NBF	100		0.22	0.70	140	3,000
NAZU151M16V6.3X8NBF	150		0.22	0.60	230	3,000
NAZU221M16V6.3X8NBF	220		0.22	0.60	230	3,000
NAZU220M25V5X6.3NBF	22	25	0.16	1.30	95	3,000
NAZU330M25V6.3X6.3NBF	33		0.16	0.70	140	3,000
NAZU470M25V6.3X6.3NBF	47		0.16	0.70	140	3,000
NAZU101M25V6.3X8NBF	100		0.16	0.60	230	3,000
NAZU100M35V5X6.3NBF	10	35	0.13	1.30	95	3,000
NAZU220M35V6.3X6.3NBF	22		0.13	0.70	140	3,000
NAZU470M35V6.3X8NBF	47		0.13	0.60	230	3,000
NAZU100M50V6.3X6.3NBF	10	50	0.12	2.00	70	3,000
NAZU220M50V6.3X6.3NBF	22		0.12	2.00	70	3,000
NAZU330M50V6.3X8NBF	33		0.12	1.35	100	3,000

## RIPPLE CURRENT FREQUENCY CORRECTION FACTORS

Frequency	100Hz	1KHz	10KHz	100KHz
10 ~ 33μF	0.60	0.75	0.95	1.00
47 ~ 330μF	0.75	0.85	0.95	1.00

## PEAK REFLOW TEMPERATURE AND DURATION

Diameter	Time above 200°C	Time above 230°C	Peak Temperature 5 seconds
5 ~ 6.3mm φ	80 sec. max.	40 sec. max.	260°C

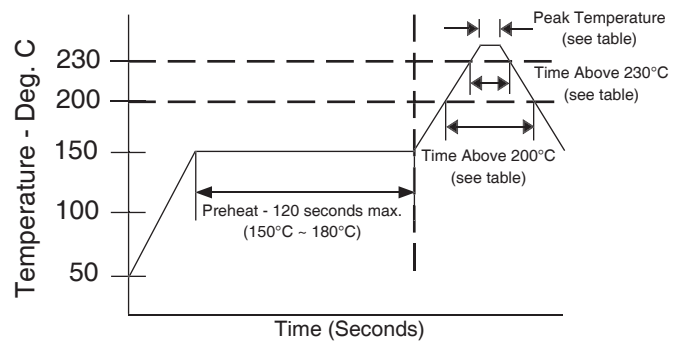

## RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
5x6.3	1.4	3.0	1.8
6x3x6.3 6.3x8	2.1	3.5	1.8

