


Multilayer Ferrite Chip Beads




Chilisin offers a wide range of multi-layered ferrite chip beads with various sizes, frequency characteristics, and impedance values for EMI solutions. These ferrite formulas are used to compose seven types of EMI suppression chip beads: SB, GB, PB, UPB, NB, HF, and VPB series.

Product Identification

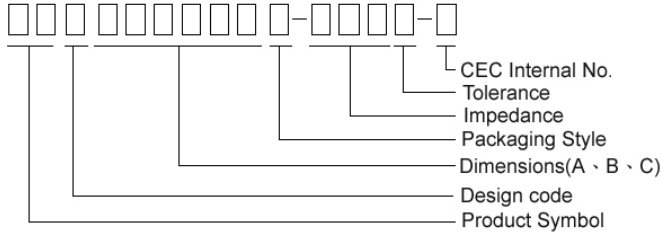

- Product symbol: SB, GB, PB, UPB, NB, HF, VPB
- Packaging: T : Tape and Reel ; B : Bulk
- Tolerance: Y = $\pm 25\%$; M = $\pm 20\%$; T: $\pm 30\%$
- Note: RoHS Compliant

Shape and Dimensions

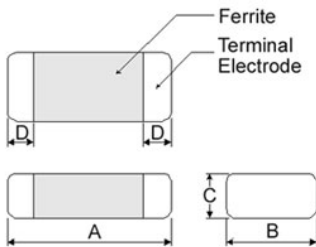


Dimensions in mm

TYPE	A	B	C	D
①060303	0.6 \pm 0.03	0.30 \pm 0.03	0.3 \pm 0.03	0.15 \pm 0.05
②100505	1.0 \pm 0.10	0.50 \pm 0.10	0.5 \pm 0.10	0.25 \pm 0.10
③160808	1.6 \pm 0.15	0.80 \pm 0.15	0.8 \pm 0.15	0.3 \pm 0.2
④201209	2.0 \pm 0.20	1.25 \pm 0.20	0.9 \pm 0.20	0.5 \pm 0.3
⑤201212	2.0 \pm 0.20	1.25 \pm 0.20	1.25 \pm 0.20	0.5 \pm 0.3
④321611	3.2 \pm 0.20	1.60 \pm 0.20	1.1 \pm 0.20	0.5 \pm 0.3
⑥321616	3.2 \pm 0.20	1.60 \pm 0.20	1.6 \pm 0.20	0.5 \pm 0.3
⑦322513	3.2 \pm 0.20	2.50 \pm 0.20	1.3 \pm 0.20	0.5 \pm 0.3
⑧451616	4.5 \pm 0.25	1.60 \pm 0.20	1.6 \pm 0.20	0.5 \pm 0.3
⑧453215	4.5 \pm 0.25	3.20 \pm 0.20	1.5 \pm 0.20	0.5 \pm 0.3

- ① : SB / PB / NB ② : SB / PB / NB / HF ⑦ : SB / PB
 ③ : SB / PB / NB / GB / UPB / HF / VPB ⑤ : UPB ⑥ : SB
 ④ : SB / PB / NB / GB / UPB ⑧ : PB / UPB

Recommended Pattern

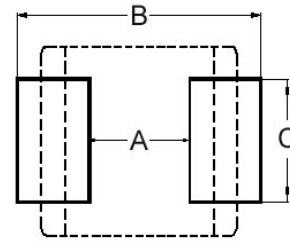

Dimensions in mm

TYPE	A	B	C
①060303	0.2 ~ 0.3	0.75 ~ 1.05	0.3
②100505	0.4	1.2 ~ 1.4	0.5
③160808	0.7 ~ 0.8	1.8 ~ 2.0	0.6 ~ 0.8
④201209	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
⑤201212	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
④321611	2.0	4.2 ~ 5.2	1.2
⑥321616	2.0	4.2 ~ 5.2	1.2
⑦322513	2.0	5.5 ~ 6.5	1.8
⑧451616	3.0	5.5 ~ 6.5	1.2
⑧453215	3.0	5.5 ~ 6.5	2.4

- * Don't apply narrower pattern than listed above to PB and UPB. Narrow pattern might cause excessive heat or open circuit.








Dimension Conversion

Code	Dimension in mm (AxBxC)	EIA
060303	0.6X0.3X0.3	0201
100505	1.0X0.5X0.5	0402
160808	1.6x0.8x0.8	0603
201209	2.0x1.2x0.9	0805
201212	2.0x1.2x1.25	0805
321611	3.2x1.6x1.1	1206
321616	3.2x1.6x1.6	1206
322513	3.2x2.5x1.3	1210
451616	4.5x1.6x1.6	1806
453215	4.5x3.2x1.5	1812

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
NBI100505T-100Y-N	100	10 \pm 30%	0.11	500
NBI100505T-220Y-N	100	22	0.18	400
NBI100505T-300Y-N	100	30	0.25	400
NBI100505T-330Y-N	100	33	0.30	400
NBI100505T-470Y-N	100	47	0.30	400
NBI100505T-750Y-N	100	75	0.45	350
NBI100505T-121Y-N	100	120	0.50	350
NBI100505T-241Y-N	100	240	0.70	250


Test Instruments : Agilent E4991A Impedance / Material Analyzer

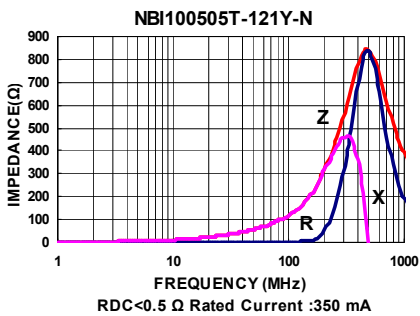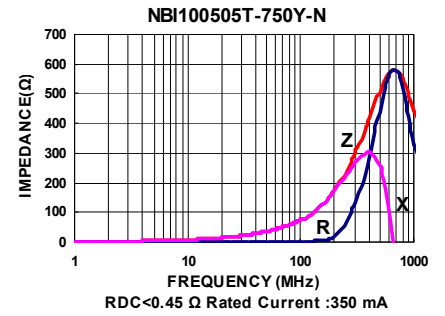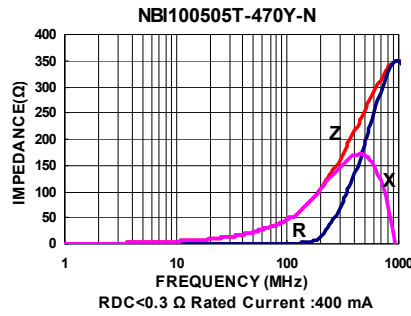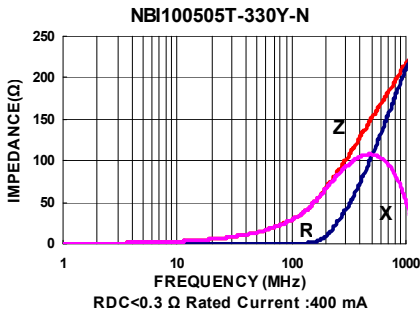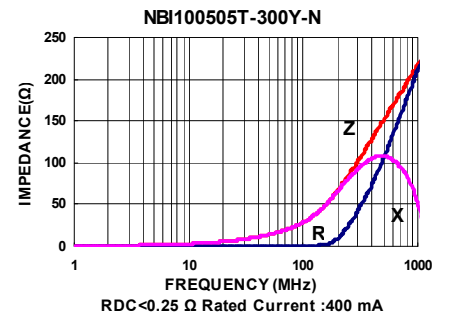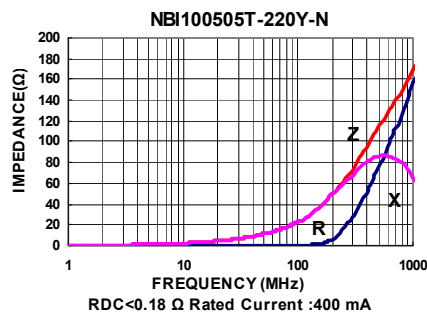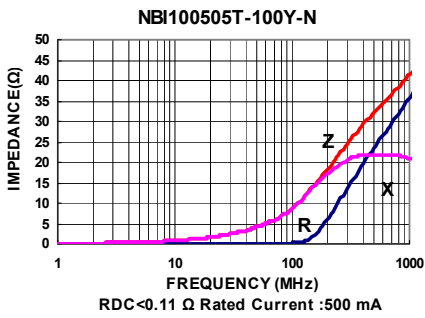




Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
NBI160808T-100Y-N	100	10 \pm 30%	0.15	500
NBI160808T-260Y-N	100	26	0.20	500
NBI160808T-300Y-N	100	30	0.20	500
NBI160808T-470Y-N	100	47	0.30	500
NBI160808T-680Y-N	100	68	0.33	450
NBI160808T-750Y-N	100	75	0.35	400
NBI160808T-101Y-N	100	100	0.40	400
NBI160808T-121Y-N	100	120	0.45	400
NBI160808T-181Y-N	100	180	0.60	300
NBI160808T-221Y-N	100	220	0.60	300
NBI160808T-241Y-N	100	240	0.60	300
NBI160808T-301Y-N	100	300	0.70	300
NBI160808T-501Y-N	100	500	0.90	200

Test Instruments : Agilent E4991A Impedance / Material Analyzer

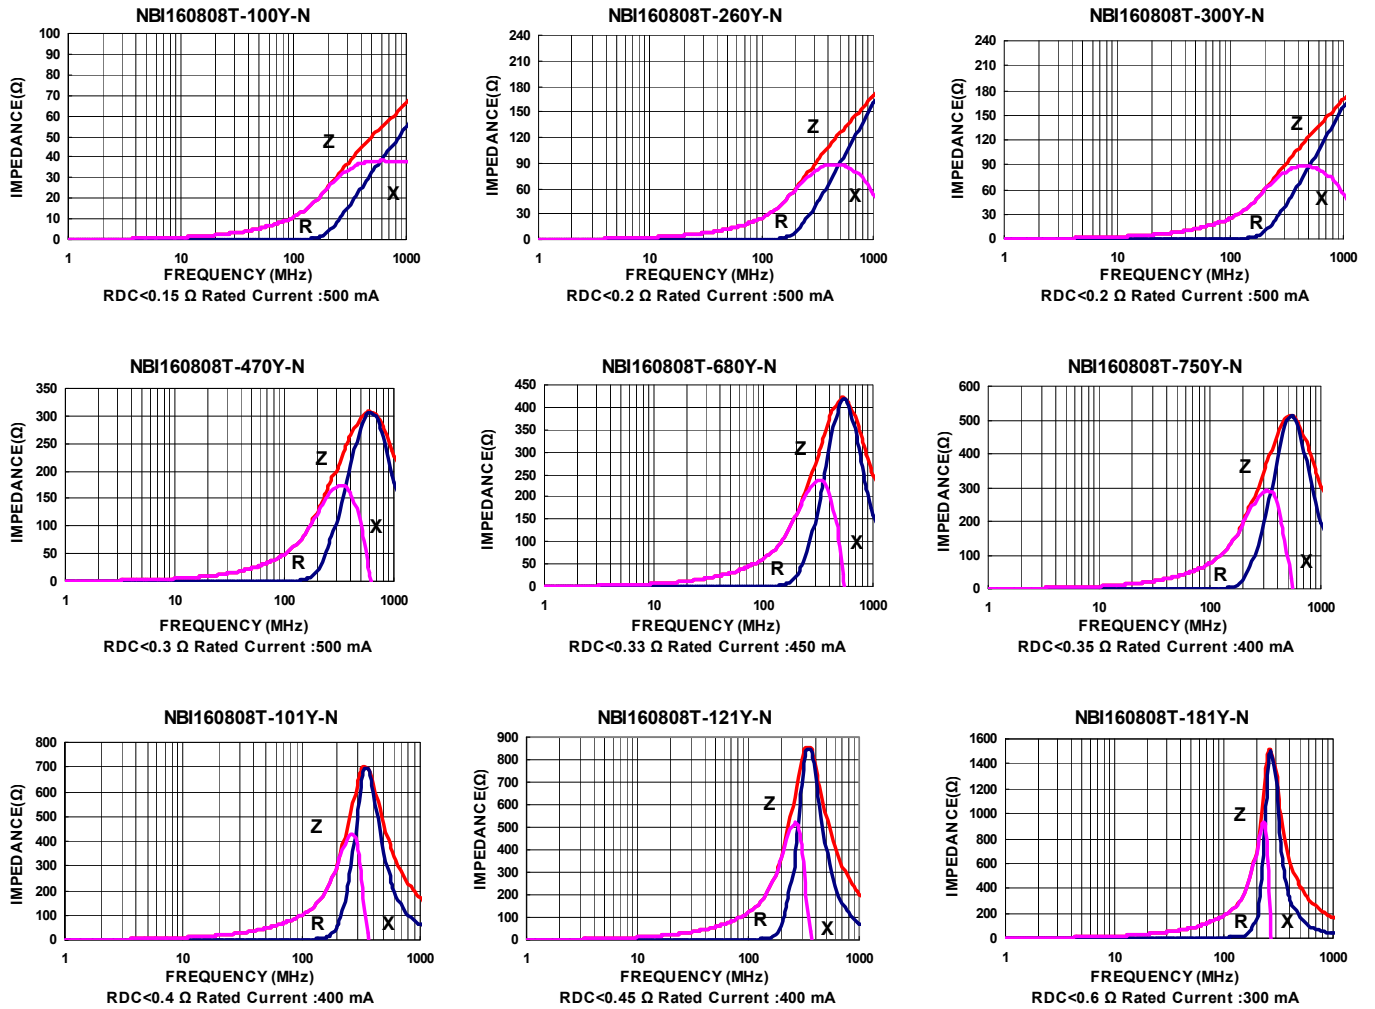

Test Instruments : Agilent E4991A Impedance / Material Analyzer

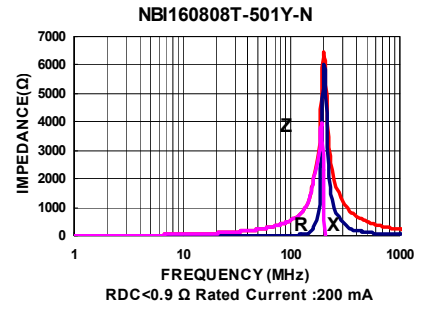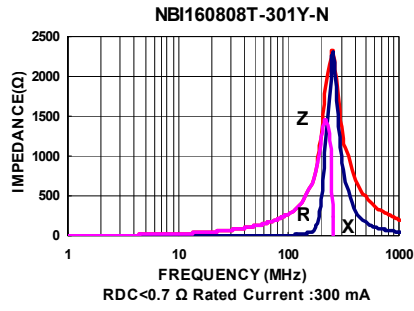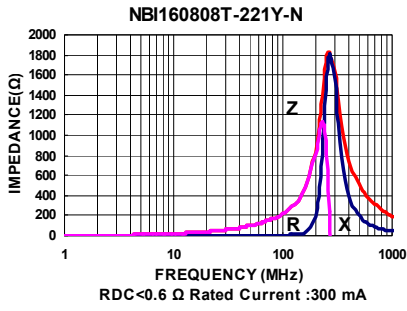

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
NBI201209T-800Y-N	100	80	0.30	500
NBI201209T-121Y-N	100	120	0.30	500
NBI201209T-301Y-N	100	300	0.50	400

Test Instruments : Agilent E4991A Impedance / Material Analyzer

