



**Features**

- 1-port Resonator
- Provides reliable, fundamental mode, quartz frequency stabilization i.e. in transmitters or local oscillators
- In a low-profile metal **D-11** case
- Lead-free production and RoHS compliance

**Package Dimensions**

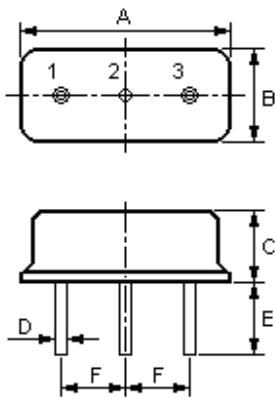

Pin No.	Function
1	Input
2	Ground
3	Output

Dimensions	Data (unit: mm)
A	8.36
B	3.45
C	3.0
D	0.45
E	3.0
F	2.54

**Marking**

**NDR315**

Ink OR Laser Marking

*\*ink Color: Black or Blue*


Top View:

"ND": Manufacturer's mark

"R": SAW resonator

"315": center Frequency

**Equivalent LC Model**

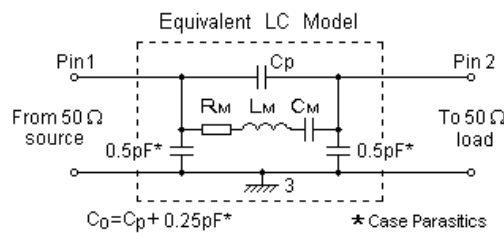

**Maximum Ratings**

Rating		Value	Unit
CW RF power dissipation	$P$	0	dBm
DC voltage between any terminals	$V_{DC}$	$\pm 30$	V
Operating temperature range	$T_A$	-40 ~ +85	°C
Storage temperature range	$T_{stg}$	-40 ~ +85	°C

Electrical Characteristics


Characteristic		Sym	Minimum	Typical	Maximum	Unit
Center Frequency (+25°C)	Absolute Frequency	$f_c$	314.925		315.075	MHz
	Tolerance from 315.000 MHz	$\Delta f_c$		$\pm 75$		kHz
Insertion Loss		IL		1.0	1.6	dB
Quality Factor	Unloaded Q	$Q_U$		14,000		
	50 $\Omega$ Loaded Q	$Q_L$		1,500		
Temperature Stability	Turnover Temperature	$T_0$	25		55	°C
	Turnover Frequency	$f_0$		$f_c$		kHz
	Frequency Temperature Coefficient	FTC		0.032		ppm/°C <sup>2</sup>
Frequency Aging	Absolute Value during the First Year	$ f_A $		$\leq 10$		ppm/yr
DC Insulation Resistance Between Any Two Pins				1.0		M $\Omega$
RF Equivalent RLC Model	Motional Resistance	$R_M$		12	20	$\Omega$
	Motional Inductance	$L_M$		84.9257		$\mu$ H
	Motional Capacitance	$C_M$		3.0090		fF
	Pin 1 to Pin 3 Static Capacitance	$C_0$	2.70	3.00	3.30	pF

RoHS Compliant

Electrostatic Sensitive Device


1. Unless noted otherwise, case temperature  $T_C = +25^\circ\text{C} \pm 2^\circ\text{C}$ .
2. The center frequency,  $f_c$ , is measured at the minimum insertion loss point with the resonator in the 50 $\Omega$  test system.
3. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
4. Turnover temperature,  $T_0$ , is the temperature of maximum (or turnover) frequency,  $f_0$ . The nominal frequency at any case temperature,  $T_C$ , may be calculated from:  $f = f_0 [1 - \text{FTC} (T_0 - T_C)^2]$ .
5. This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance  $C_0$  is the static capacitance between the two terminals measured at low frequency (10MHz) with a capacitance meter. The measurement includes case parasitic capacitance.

Temperature Characteristics

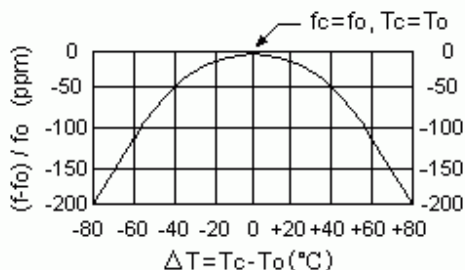


The curve shown above accounts for resonator contribution only.

Test Circuit

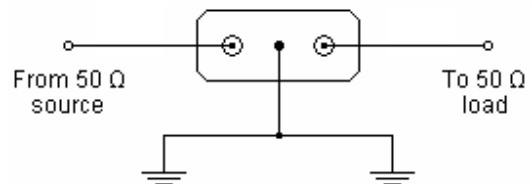


Typical Frequency Response

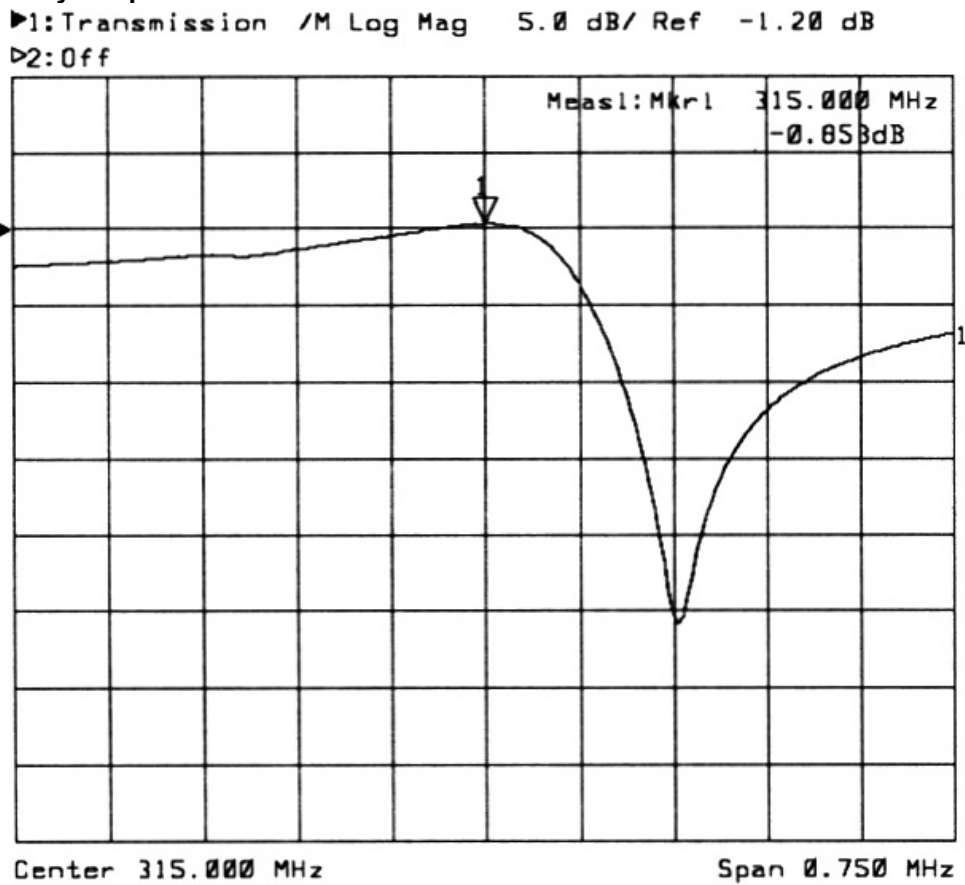


Typical Application Circuits

1) Low-Power Transmitter Application

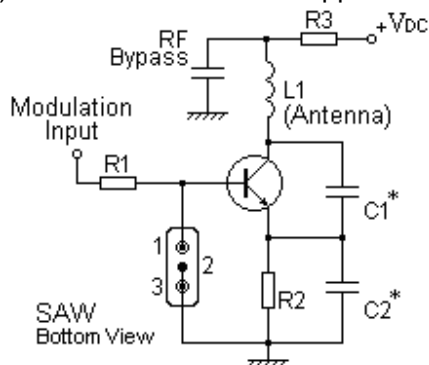

2) Local Oscillator Application

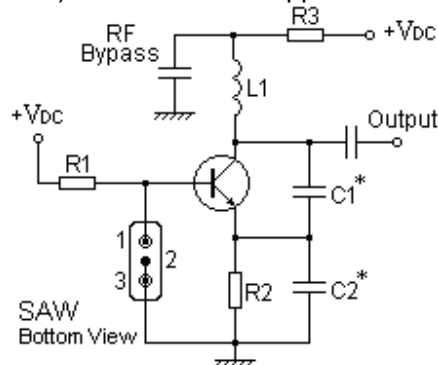

© NEDI 2009. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail [winnsky@winnsky.com](mailto:winnsky@winnsky.com)