


**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

---

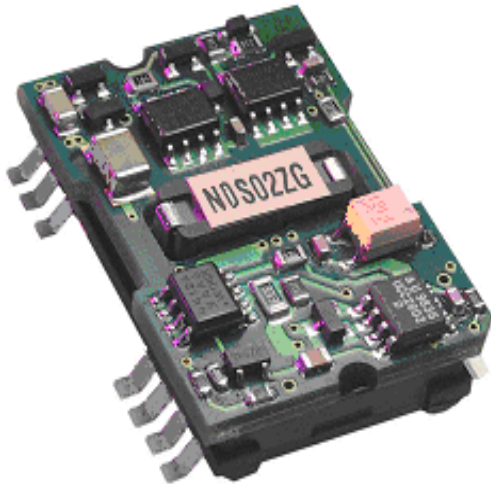

## Applications

- Distributed power architectures
- Telecommunications equipment
- LAN/WAN applications
- Data processing
- Industrial applications

## Description

The NDS series of converters are low profile, single output, DC/DC converters intended for SMT placement and reflow soldering. The product provides on-board conversion of standard telecom, datacom and industrial input voltages to isolated low output voltages. Proprietary patented manufacturing process ensures optimal quality with full process automation. These are high performance, cost effective converters with an extremely small PCB footprint.

## Features

- Single board design
- 8.2 mm height profile
- Input/output isolation: 1500 Vdc
- Low conducted and radiated EMI
- Excellent co-planarity
- Output overcurrent protection
- Full rated output power at 100LFM airflow
- Operating temperature to 100°C
- Remote shutdown (primary referenced)
- Output voltage trim adjust, positive or negative
- UL, CSA and EN/IEC60950 (3<sup>rd</sup> ed.) approvals pending

**Selection Chart**

Model	Input voltage range, Vdc	Input current, max Adc	Output voltage, Vdc	Output rated current, Adc	Output ripple and noise, mVp-p	Efficiency, %
NDS03ZA-M6	36-75	0.18	1.5	3.0	40	77
NDS03ZB-M6	36-75	0.22	1.8	3.0	45	79
NDS03ZD-M6	36-75	0.28	2.5	3.0	60	83
NDS03ZE-M6	36-75	0.35	3.3	3.0	75	85
NDS02ZG-M6	36-75	0.35	5.0	2.0	90	87

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Absolute Maximum Ratings**

Stresses in excess of the absolute maximum ratings may cause performance degradation, adversely affect long-term reliability and cause permanent damage to the converter. Specifications apply over specified input voltage, output load and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Max	Units
Input voltage (Vin)	Continuous	36	75	Vdc
Transient Input Voltage (Vint)	Transient, 100ms		100	Vdc
Operating CaseTemp. (Tc)	At 100% load	-40	100	°C
Storage Temperature (Ts)		-55	120	°C
ON/OFF Control Voltage (Vrc)	Referenced to -Vin	-1.0	5.5	Vdc

**Environmental and Mechanical Specifications**

Specifications apply over specified input voltage, output load and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Nom	Max	Units
Shock	IEC68-2-27			100	g
Sinusoidal Vibration	IEC68-2-6			10	g
Weight				0.4/10	oz/g
Water Washing	Standard process	Yes			N/A
MTBF	Per Bellcore TR-NWT-000332		2,500		kHrs

**Isolation Specifications**

Specifications apply over specified input voltage, output load and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Nom	Max	Units
Insulation Safety Rating	Vin = 36 – 75Vdc	Basic			N/A
Isolation Voltage (Vps)				1,500	Vdc
Isolation Resistance (Rps)		10			MOhm
Isolation Capacitance (Cps)			4,100		pF

**Input Specifications**

Specifications apply over specified input voltage, output load and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage (Vin)	Continuous	36	48	75	Vdc
Input Current when Shutdown	Vin.Nom, Remote Control activated		3	6	mAdc
Turn-On Input Voltage 36-75 Vin	Ramping Up, Io.Max	32	34	36	Vdc
Turn-Off Input Voltage 36-75 Vin	Ramping Down, Io.Max	30	32	34	Vdc
Turn-On Time	To Output Regulation Band After Remote Control Rise Time		350	500	ms
			1	5	ms
			1	5	ms
Input Reflected Ripple Current	Vin.Max, Io.Max			50	mAp-p
Input Capacitance				1.4	µF

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Output Specifications**



All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

**NDS03ZA : 1.5V/3.0A**

Parameter	Conditions/Description	Min	Nom	Max	Units
Output Voltage Setpoint Accuracy	$V_o$ $V_{in.Nom}, I_o = 1.5A, 25^\circ C$	1.48	1.50	1.52	Vdc
Output Current	$I_o$ $V_{in.Min}$ to $V_{in.Max}$	0		3.0	Adc
Line Regulation	$V_{in.Min}$ to $V_{in.Max}, 50\% I_o.Max$			25	mV
Load Regulation	$V_{in.Nom}, I_o.Min$ to $I_o.Max$			25	mV
Dynamic Regulation Peak Deviation	50-100% $I_o.Max$ load step change.			250	$\pm$ mV
Settling Time	to 1% error band			1,150	$\mu s$
Output Voltage Ripple*	$V_r$ $V_{in.Min}$ to $V_{in.Max}, I_o.Min$ to $I_o.Max, 20MHz$ Bandwidth		40	75	mVp-p
Admissible Load Capacitance	$C_{omax}$ $I_o.Max, V_{in.Nom}$			2,200	$\mu F$
Output Current Limit Threshold	$I_{cl}$ $V_{out} \leq 0.90 V_o.Nom$	120		200	% $I_o.Max$
Switching Frequency	$F_s$ $V_{in.Nom}, I_o.Max$		400		kHz
Temperature Coefficient	$T_{co}$			0.02	% $V_o/^\circ C$
Trim Range	$V_t$ $I_o.Min$ to $I_o.Max, V_{in.Min}$ to $V_{in.Max}$	1.35		1.65	$V_o$

\* Measured with a 1 $\mu F$  ceramic across the output pins

**NDS03ZA Characteristic curves**

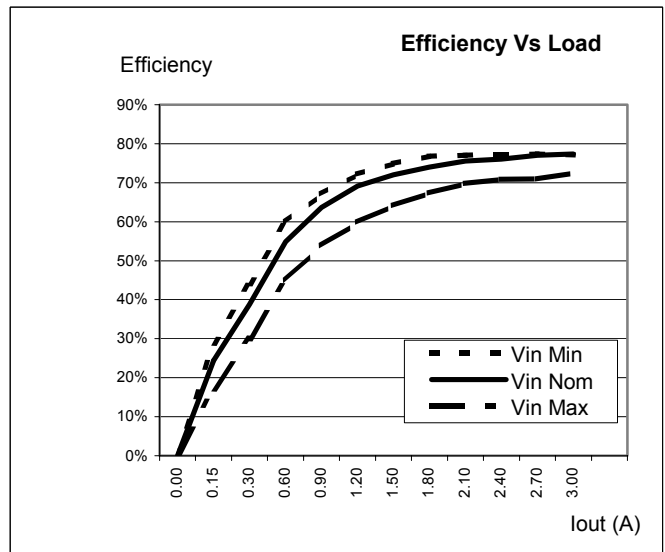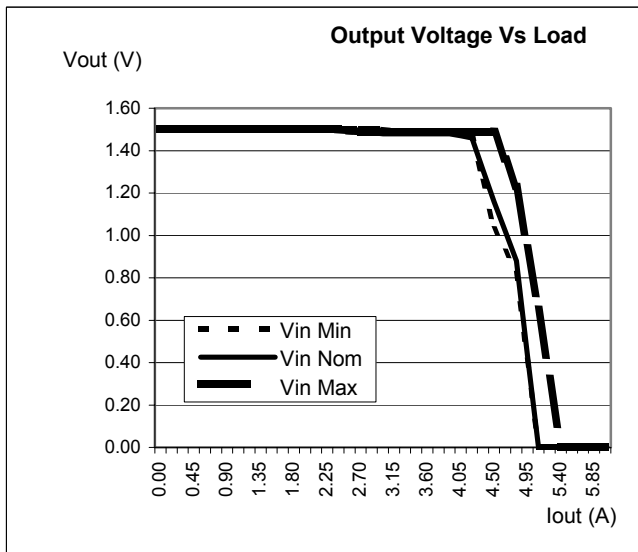

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Output Specifications**



All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

**NDS03ZB : 1.8V/3.0A**

Parameter		Conditions/Description	Min	Nom	Max	Units
Output Voltage Setpoint Accuracy	Vo	Vin.Nom, Io = 1.5A, 25°C	1.78	1.80	1.82	Vdc
Output Current	Io	Vin.Min to Vin.Max	0		3.0	Adc
Line Regulation		Vin.Min to Vin.Max, 50% Io.Max			25	mV
Load Regulation		Vin.Nom, Io.Min to Io.Max			25	mV
Dynamic Regulation Peak Deviation		50-100% Io.Max load step change.			250	± mV
Settling Time		to 1% error band			1,150	µs
Output Voltage Ripple*	Vr	Vin.Min to Vin.Max, Io.Min to Io Max, 20MHz Bandwidth		50	75	mVp-p
Admissible Load Capacitance	Comax	Io.Max, Vin.Nom			2,200	µF
Output Current Limit Threshold	Icl	Vout ≤ 0.90 Vo.Nom	120		200	%Io.Max
Switching Frequency	Fs	Vin.Nom, Io.Max		400		kHz
Temperature Coefficient	Tco				0.02	%Vo/°C
Trim Range	Vt	Io.Min to Io.Max, Vin.Min to Vin.Max	1.62		1.98	Vo

\* Measured with a 1µF ceramic across the output pins

**NDS03ZB Characteristic curves**

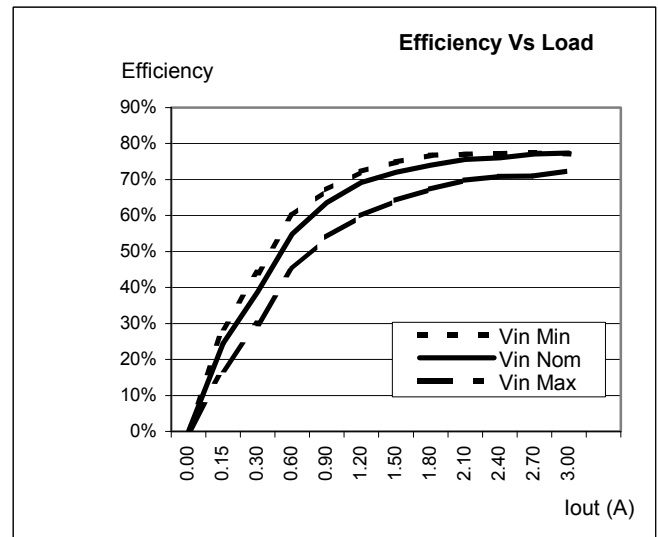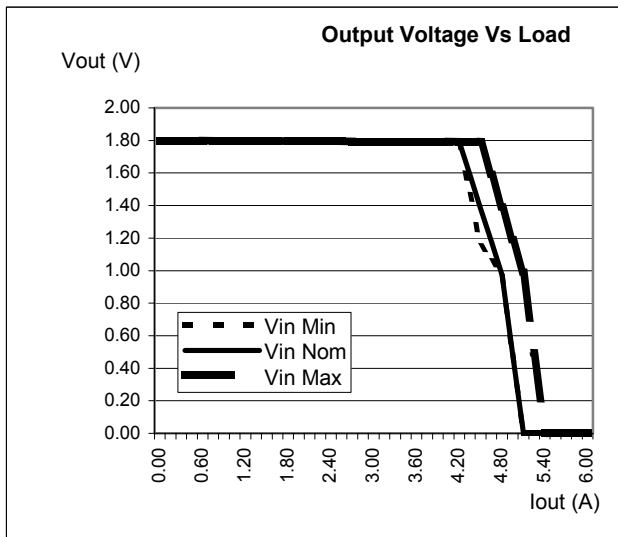

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Output Specifications**



All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

**NDS03ZD : 2.5V/3.0A**

Parameter		Conditions/Description	Min	Nom	Max	Units
Output Voltage Setpoint Accuracy	Vo	Vin.Nom, Io = 1.5A, 25°C	2.47	2.5	2.53	Vdc
Output Current	Io	Vin.Min to Vin.Max	0		3.0	Adc
Line Regulation		Vin.Min to Vin.Max, 50% Io.Max			50	mV
Load Regulation		Vin.Nom, Io.Min to Io.Max			50	mV
Dynamic Regulation Peak Deviation		50-100% Io.Max load step change.			250	± mV
Settling Time		to 1% error band			1,150	µs
Output Voltage Ripple	Vr	Vin.Min to Vin.Max, Io.Min to Io Max, 20MHz Bandwidth		50	75	mVp-p
Admissible Load Capacitance	Comax	Io.Max, Vin.Nom			2,200	µF
Output Current Limit Threshold	Icl	Vout ≤ 0.90 Vo.Nom	120		200	%Io.Max
Switching Frequency	Fs	Vin.Nom, Io.Max		400		kHz
Temperature Coefficient	Tco				0.02	%Vo/°C
Trim Range	Vt	Io.Min to Io.Max, Vin.Min to Vin.Max	2.25		2.75	Vo

\* Measured with a 1µF ceramic across the output pins

**NDS03ZD Characteristic curves**

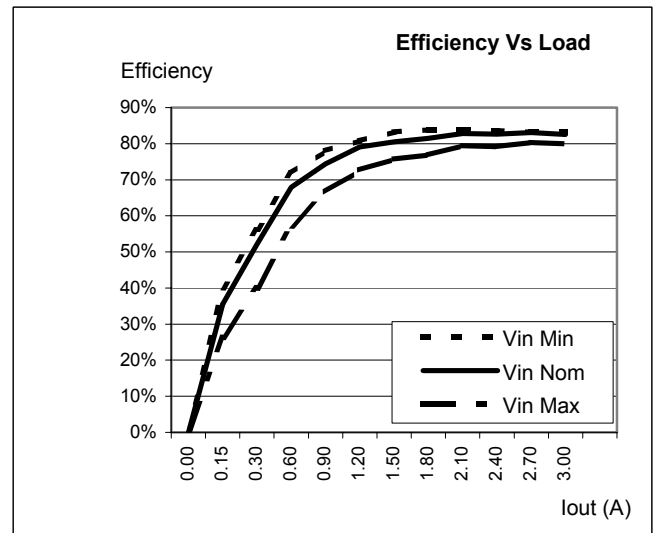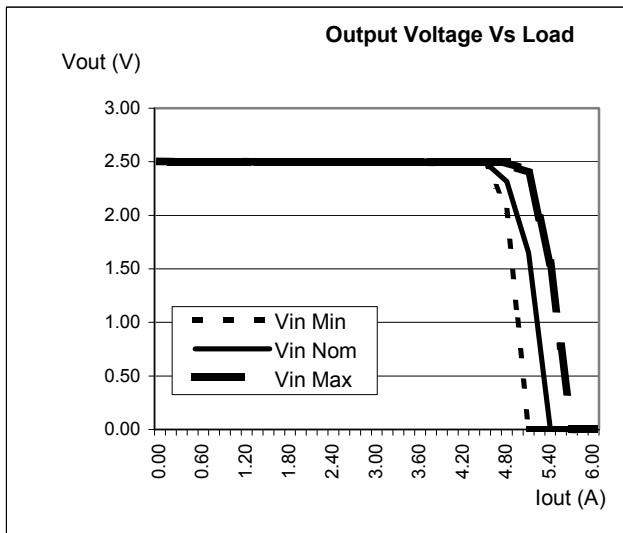

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Output Specifications**



All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

**NDS03ZE : 3.3V/3.0A**

Parameter		Conditions/Description	Min	Nom	Max	Units
Output Voltage Setpoint Accuracy	Vo	Vin.Nom, Io = 1.5A, 25°C	3.26	3.3	3.34	Vdc
Output Current	Io	Vin.Min to Vin.Max	0		3.0	Adc
Line Regulation		Vin.Min to Vin.Max, 50% Io.Max			65	mV
Load Regulation		Vin.Nom, Io.Min to Io.Max			65	mV
Dynamic Regulation Peak Deviation		50-100% Io.Max load step change.			250	± mV
Settling Time		to 1% error band			250	µs
Output Voltage Ripple*	Vr	Vin.Min to Vin.Max, Io.Min to Io Max, 20MHz Bandwidth		50	75	mVp-p
Admissible Load Capacitance	Comax	Io.Max, Vin.Nom			2,200	µF
Output Current Limit Threshold	Icl	Vout ≤ 0.90 Vo.Nom	120		200	%Io.Max
Switching Frequency	Fs	Vin.Nom, Io.Max		400		kHz
Temperature Coefficient	Tco				0.02	%Vo/°C
Trim Range	Vt	Io.Min to Io.Max, Vin.Min to Vin.Max	3.0		3.6	Vo

\* Measured with a 1µF ceramic across the output pins

**NDS03ZE Characteristic curves**

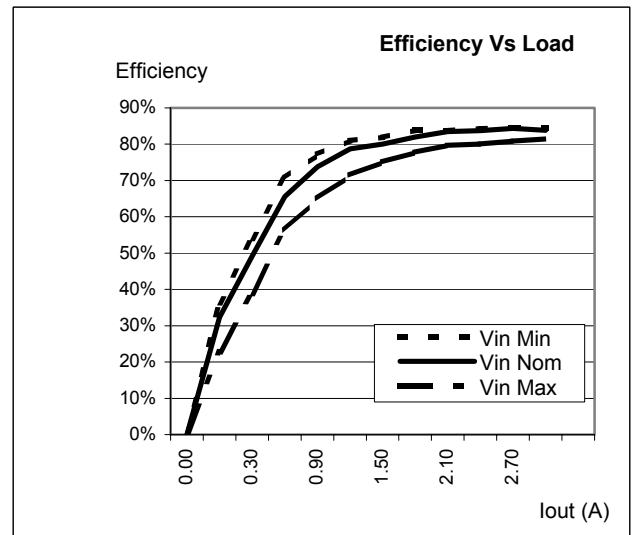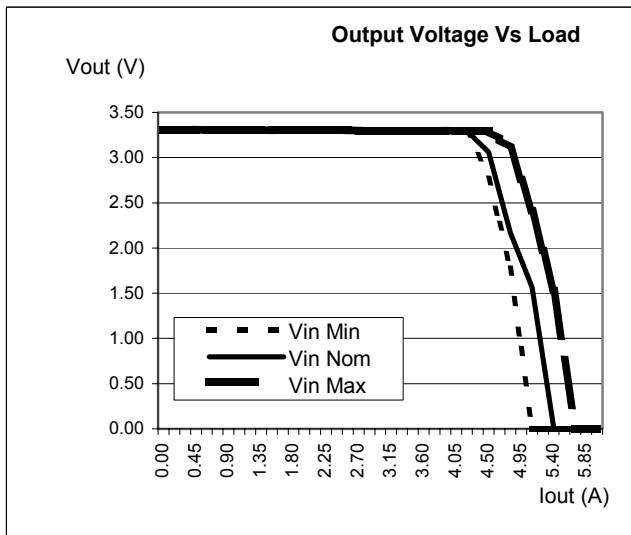

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Output Specifications**



All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

**NDS02ZG : 5.0V/2.0A**

Parameter		Conditions/Description	Min	Nom	Max	Units
Output Voltage Setpoint Accuracy	Vo	Vin.Nom, Io = 1.0A, 25°C	4.94	5.0	5.06	Vdc
Output Current	Io	Vin.Min to Vin.Max	0		2.0	Adc
Line Regulation		Vin.Min to Vin.Max, 50% Io.Max			65	mV
Load Regulation		Vin.Nom, Io.Min to Io.Max			65	mV
Dynamic Regulation Peak Deviation		50-100% Io.Max load step change.			350	± mV
Settling Time		to 1% error band			250	µs
Output Voltage Ripple*	Vr	Vin.Min to Vin.Max, Io.Min to Io.Max, 20MHz Bandwidth		75	125	mVp-p
Admissible Load Capacitance	Comax	Io.Max, Vin.Nom			2,200	µF
Output Current Limit Threshold	Icl	Vout ≤ 0.90 Vo.Nom	120		200	%Io.Max
Switching Frequency	Fs	Vin.Nom, Io.Max		400		kHz
Temperature Coefficient	Tco				0.02	%Vo/°C
Trim Range	Vt	Io.Min to Io.Max, Vin.Min to Vin.Max	4.5		5.5	Vo

\* Measured with a 1µF ceramic across the output pins

**NDS02ZG Characteristic curves**

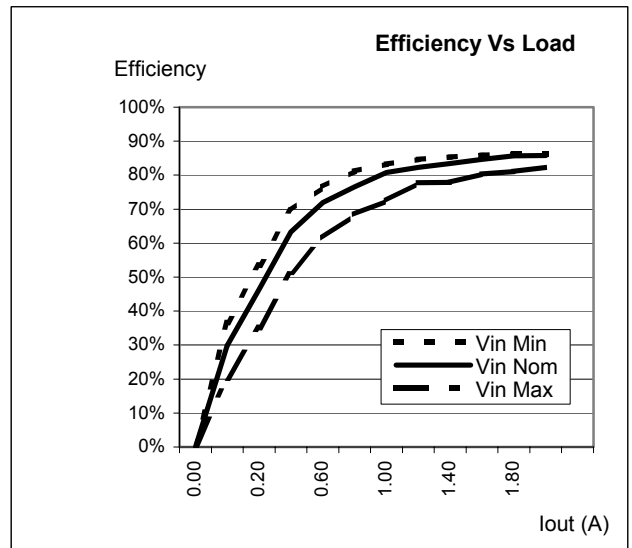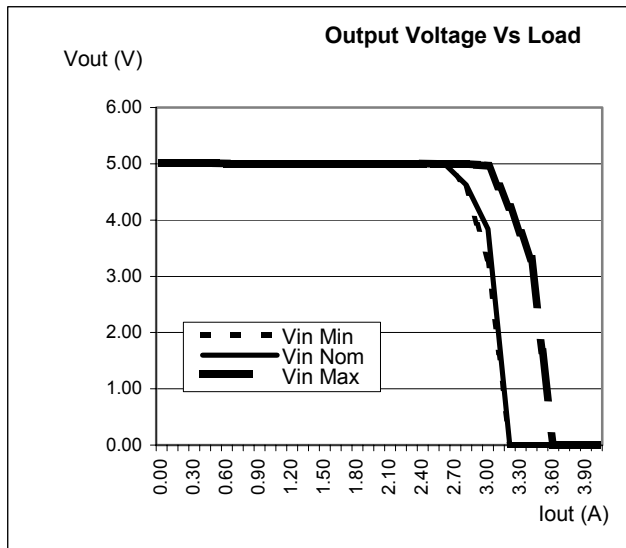

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**


**Feature Specifications**

All specifications apply over input voltage, output load and temperature range, unless otherwise noted.

Parameter	Conditions/Description	Min	Nom	Max	Units
Shutdown Control:					
Converter OFF	Shutdown pin is pulled low	-1.0		1.0	Vdc
Converter ON	Voltage source or open circuit	3.5		5.5	Vdc
Sink Current	Vin=Vin.Nom		0.3		mAdc

**Temperature Derating Curves**

The derating curves below give an indication of the output power achievable with and without forced air-cooling. However in the final application, in order to ensure the reliability of the unit, care must be taken to ensure the maximum case temperature is not exceeded under any conditions.

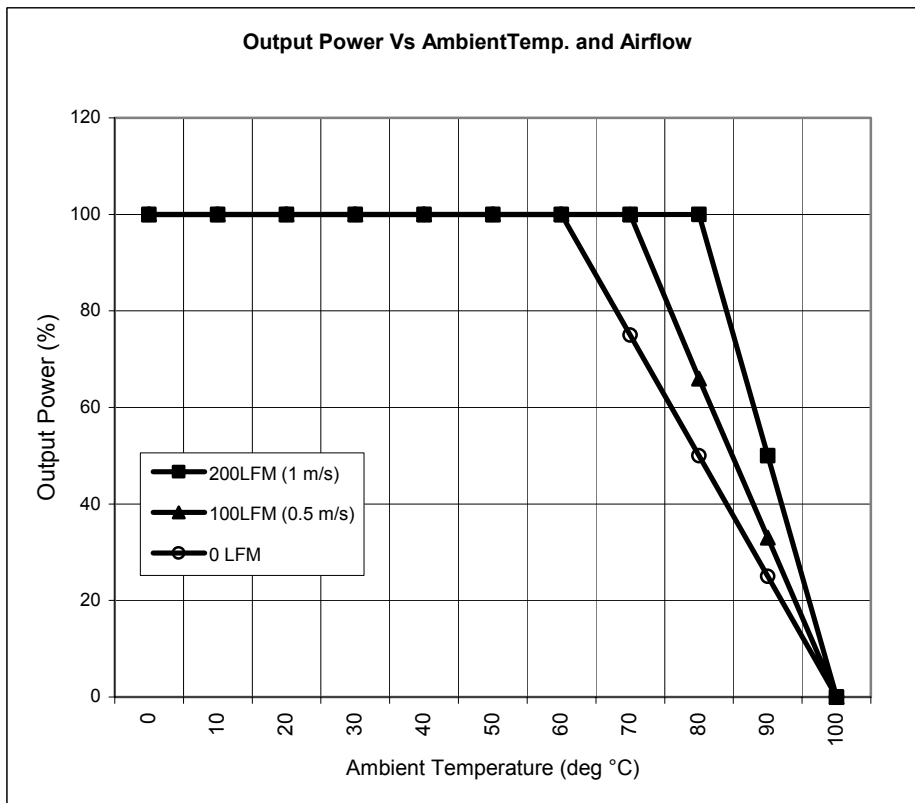



**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

---

### Typical Application

This series of converters does not require any external components for proper operation. However, if the distribution of the input voltage to the converter contains significant inductance, a capacitor across the input terminals may be required to stabilize the input voltage. A minimum of 1µF, quality electrolytic / ceramic capacitor is recommended for this purpose.

For output decoupling it is recommended connecting a 1µF ceramic capacitor directly across the output pins of the converter.

### Shutdown Feature

The remote control pin functions as a normal soft shutdown. It is referenced to the -Vin pin. With positive logic, when the remote control pin is pulled low, the output is turned off and the unit goes into a very low input power mode.

An open collector switch is recommended to control the voltage between the remote control pin and the -Vin pin of the converter. The remote control pin is pulled up internally, so no external voltage source is required. The user should avoid connecting a resistor between the remote control pin and the +Vin pin.

The user must take care to ensure that the pin reference for the control is connected close to the -Vin pin. The control signal must not be referenced ahead of EMI filtering, or remotely from the unit. If the remote control pin is not used, it can be left floating.

### Thermal Considerations

The converter is designed for natural or forced convection cooling. The output power of the converter is limited by the maximum case temperature (Tc). To ensure reliable long term operation of the converters, and to comply with safety agency requirements, Power-One limits maximum allowable case temperature (Tc) to 100°C (see Mechanical Drawings).

### Parallel Operation

Paralleling of two converters is not possible.

### Output Current Limiting

When the output is overloaded above the maximum output current rating, the voltage will start to reduce to maintain the output power to a safe level. In a condition of high overload or short-circuit where the output voltage is pulled below approximately 30% of Vo.Nom, the unit will enter a 'Hiccup' mode of operation. Under this condition the unit will attempt to restart, approximately every 25ms until the overload has cleared.

### Output Voltage Trim

The trim feature allows the user to adjust the output voltage from the nominal.

Output voltage can be adjusted by an external resistor. To increase Vo a resistor should be connected between pins 12 and 14. To decrease Vo a resistor should be connected between pins 12 and 13.

To **increase** Vo:

$$R_{ext} = (A - (D \times V_{out})) / (V_{out} - V_{out.Nom})$$

To **reduce** Vo:

$$R_{ext} = ((B \times V_{out}) - C) / (V_{out.Nom} - V_{out})$$

Where Vout is the desired output voltage

Model	A	B	C	D
NDS03ZA	1945	1470	1944	470
NDS03ZB	2590	1730	2560	750
NDS03ZD	5010	2516	5010	1500
NDS03ZE	7010	3161	7010	1500
NDS02ZG	11260	4532	11240	1500

#### Note:

When the output voltage is trimmed up, the output power from the converter must not exceed its maximum rating. This is determined by measuring the voltage on the output pins, and multiplying it by the output current.

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Safety Considerations**

These converters feature 1500 Volt DC isolation from input to output. The input to output resistance is greater than 10M $\Omega$ . These converters are provided with Operational Insulation between input and output circuits according to EN60950 / UL1950 / CSA60950-00. Nevertheless, if the system using the converter needs to receive safety agency approval, certain rules must be followed in the design of the system. In particular, all of the creepage and clearance requirements of the end-use safety requirements must be observed. These documents include UL60950, CSA60950-00 and EN60950, although specific applications may have additional requirements.

In order for the output of the converter to be considered as SELV (Safety Extra Low Voltage) or TNV-1, according to EN60950 / UL1950 / CSA60950-00, one of the following requirements must be met in the system design:


- The converter has no internal fuse. An external fuse must be provided to protect the system from catastrophic failure. A fuse with a rating not greater than 2.0A is recommended. The user can select a lower rating fuse based upon the inrush transient and the maximum input current of the converter, which occurs at the minimum input voltage. Both input traces and the chassis ground trace (if applicable) must be capable of conducting a current of 1.5 times the value of the fuse without opening. The fuse must not be placed in the grounded input line, if any.
- If the voltage source feeding the module is SELV, the output of the converter is considered SELV and may be grounded or ungrounded.
- The circuitry of the converter may generate transients, which exceed the input voltage. Even if the input voltage is SELV (<60V) the components on the primary side of the converter may have to be considered as hazardous. A safety interlock may be needed to prevent the user from accessing the converter while operational.

**EMC Specifications**

Conducted Noise:

The converters meet the requirements of EN55022, CISPR22 and FCC CFR title 47 part 15 Sub-part J - Conducted (conducted noise on the input terminals) without any external components. The results for this solution are displayed below.

To meet level B for the above standards it is necessary to fit a 5 $\mu$ F ceramic capacitor across the input terminals.

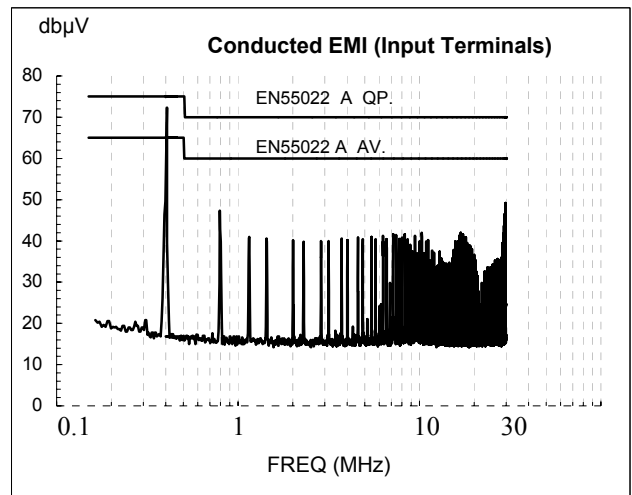

Electromagnetic Susceptibility:

Standard	Applied Stress	Class Level	Performance Outcome *
Electrostatic Discharge EN61000-4-2	2KV to pins	1	B
Electromagnetic Field EN61000-4-3	3V/m	2	A
Electrical Fast Transient EN61000-4-4	2000 Vp to input	3	B
Conducted Disturbances EN61000-4-6	3Vrms to input	2	B

\* **A** denotes normal operation, no deviation from specification. **B** denotes temporary deviation from specification is possible.

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

**Surface Mount Assembly**

**Soldering:**

The following instructions must be observed when soldering the unit. Failure to observe these instructions may result in failure or significant degradation of the module performance. Power-One will not honor any warranty claims arising from failure to observe these instructions.

This product is approved for forced convection reflow soldering only.



The curves below define the maximum peak reflow temperature permissible measured on Pins 1 and 10 of the converter.

The lead-frame is constructed for a high temperature glass filled, UL94V0 flame retardant, diallyl ortho-phthalate moulding compound commonly used for packaging of electronics components. It has passed NASA outgassing tests and is certified to MIL-M-14. The coefficient of thermal expansion is equivalent to FR4.

The gull wing leads are formed to ensure optimal solder joint strength and structure. Furthermore they facilitate visual inspection (manual or automatic). The leads are formed from a 97% Cu alloy plated with Cu and Sn 90. This material is commonly used in the manufacture of integrated circuits. It has good corrosion resistance and exhibits the nobility inherent to all high copper alloys. Unlike brasses, this material is essentially immune to stress corrosion cracking. It also exhibits excellent solderability. It is readily wetted by solders and performs well in standard solderability tests. (Dip of Class II or better).

The product is manufactured with a patented process, which is fully automated, and 'in-line'. This ensures that there is no contamination or mechanical stress on the lead-frame so that the co-planarity and solderability are maintained.

The product is shipped in JEDEC trays to guarantee preservation of the co-planarity and enable fully automated assembly in the final application.

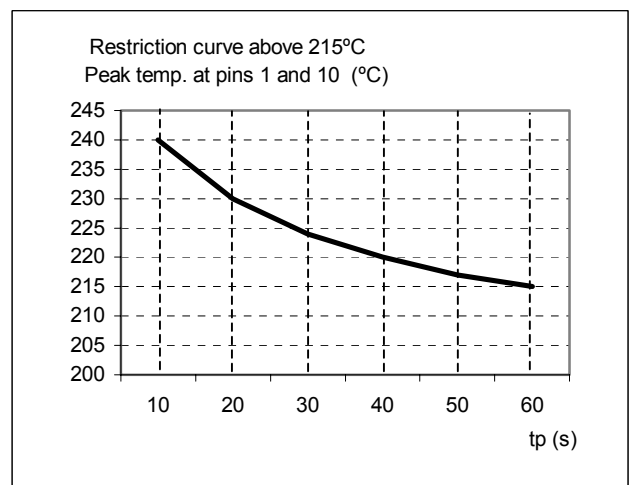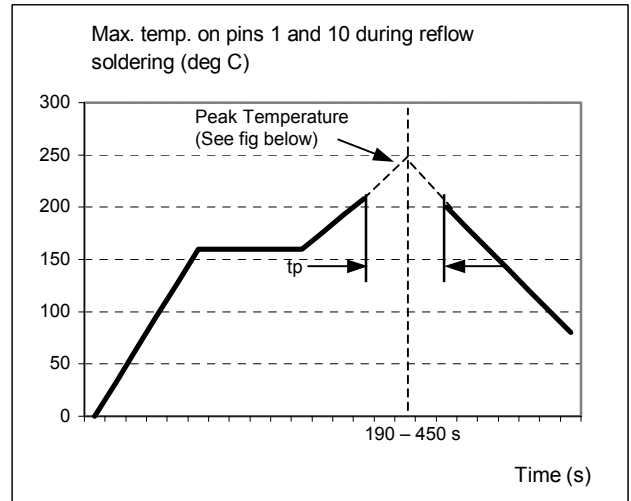




**Pick & Place Assembly:**

The product is designed with a large flat area in the center of the top surface to serve as a pick up point for automated vacuum pick and place equipment. The 'open board' construction of the unit ensures that weight is kept to a minimum. However due to the relatively large size of the component, a large nozzle (> 3.0mm, depending on vacuum pressure) is recommended for picking and placing.


The unit may also be automatically handled using 'odd-form' placement equipment, with mechanical grippers. For this type of equipment the end edges of the device, which have no leads and also feature the greatest dimensional accuracy, should be used as pick-up points.

**Mechanical Drawings**


Note:- mm[inches]  
 Tolerances: -  
**0.5-10 ±0.1**  
**10-100 ±0.2**

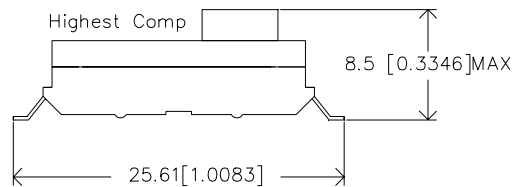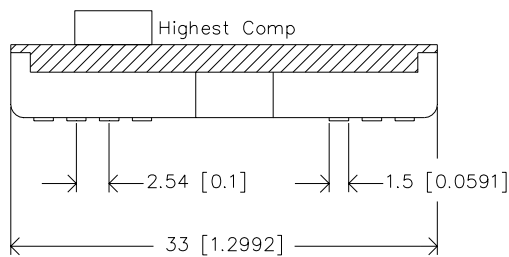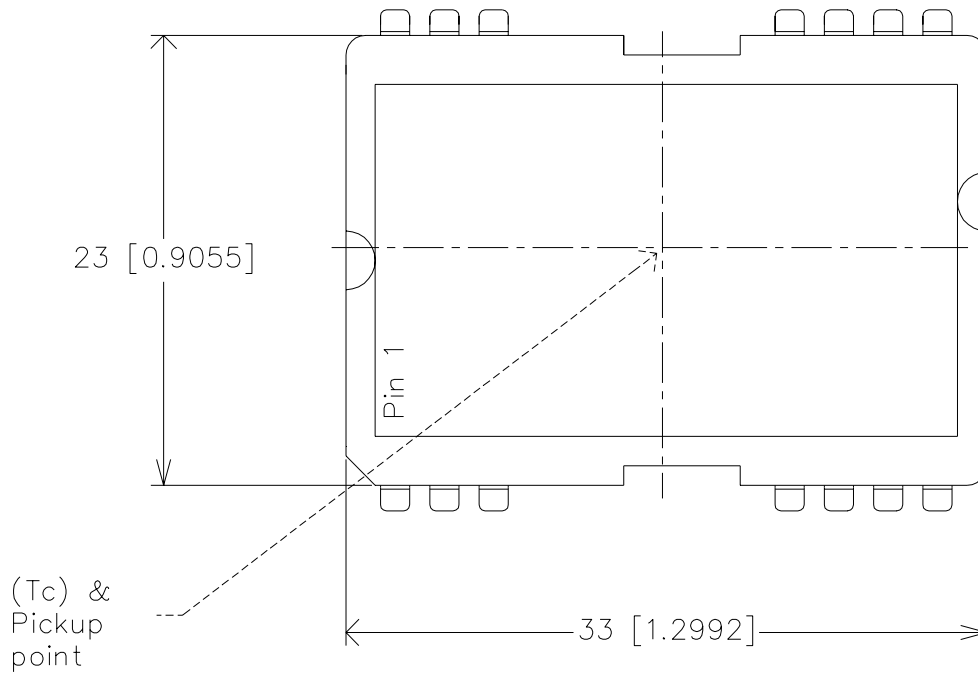

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

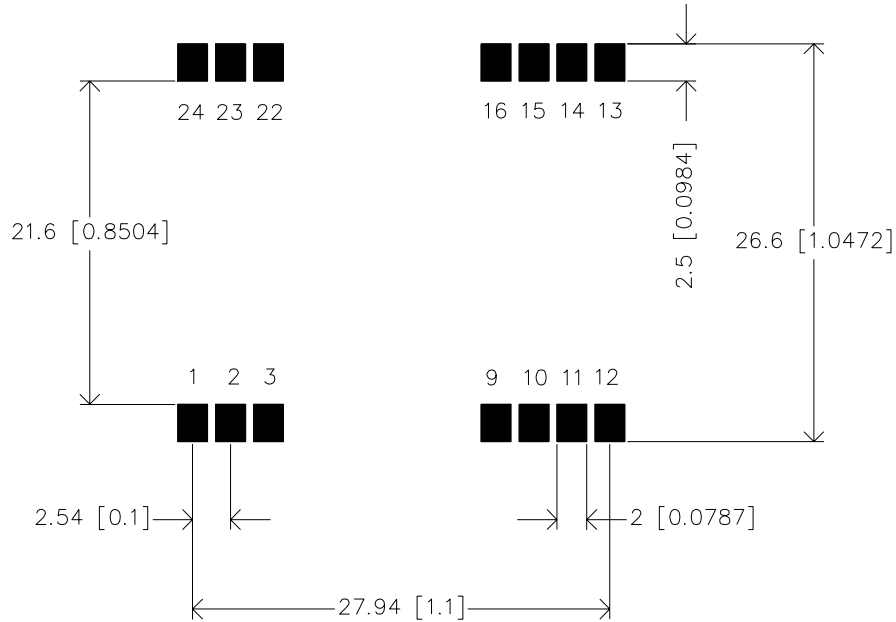

**RECOMMENDED LAND PATTERN**

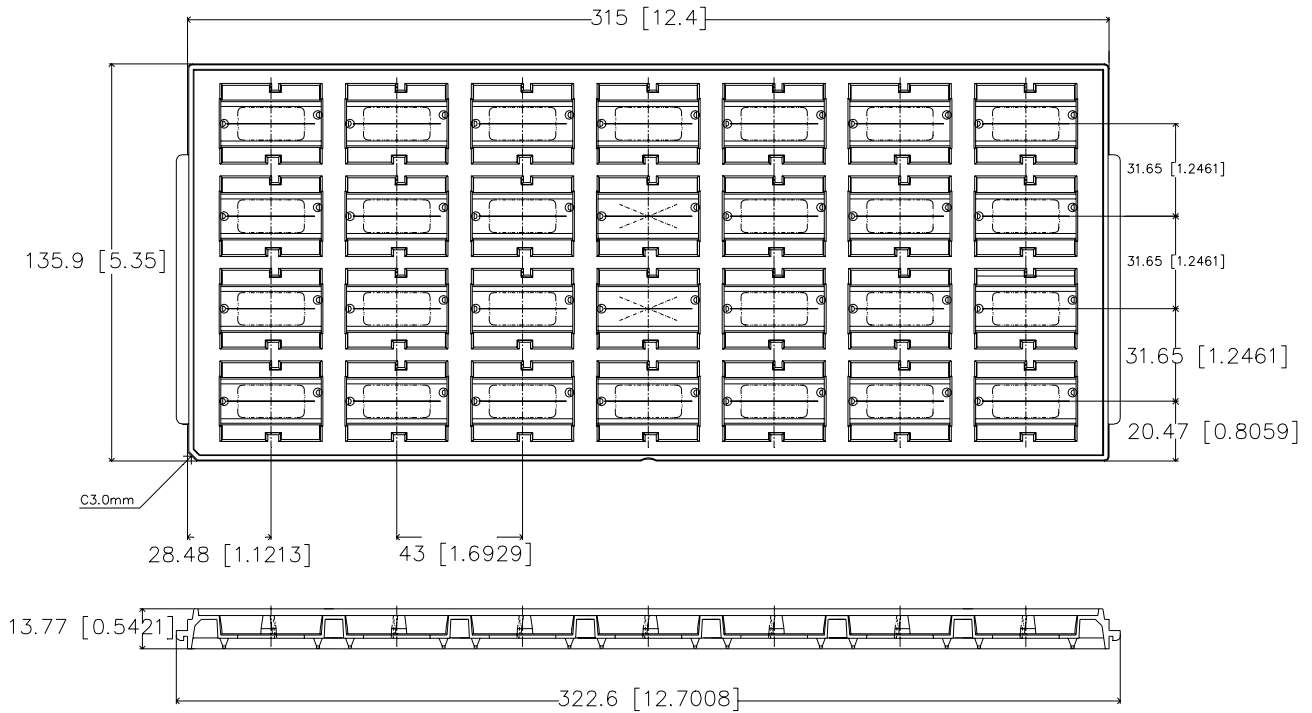

**NDS Series: 10W / 3.0A DC/DC Converters**  
**36-75V Input**  
**1.5V, 1.8V, 2.5V, 3.3V and 5.0V Outputs**

---

### Pin-Out

Pin	Designation	Function	Reference
1	Shutdown	Shutdown control. Pull low to turn unit off	Primary
2	-Vin	Input voltage return	Primary
3	NC	No connection	Primary
4	No Pin	No pin	
5	No Pin	No pin	
6	No Pin	No pin	
7	No Pin	No pin	
8	No Pin	No Pin	
9	NC	No connection	Secondary
10	NC	No connection	Secondary
11	NC	No connection	Secondary
12	Trim	Output voltage adjust	Secondary
13	+Vout	Positive output voltage	Secondary
14	-Vout	Output voltage return	Secondary
15	NC	No connection	Secondary
16	NC	No connection	Secondary
17	No Pin	No pin	
18	No Pin	No pin	
19	No Pin	No pin	
20	No Pin	No pin	
21	No Pin	No Pin	
22	NC	No connection	Primary
23	+Vin	Positive input voltage	Primary
24	NC	No connection	Primary

### Ordering Information

Options	Suffixes to add to part number
Surface Mount Version, shipped in JEDEC Tray	Add Suffix "-M6".
Through hole (leaded) version.	Consult factory for availability.
24V input version	Consult factory for availability.

### Notes

1. Consult factory for the complete list of available options.
2. Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.
3. Specifications are subject to change without notice.